The UK's **Biggest Selling** Amiga Magazine

CU

AMIGA

MAGAZINE

ovember 1997 £5.99 US$13.50 • L22,500 • ASCH235 • BFR 520 • DM 28.00

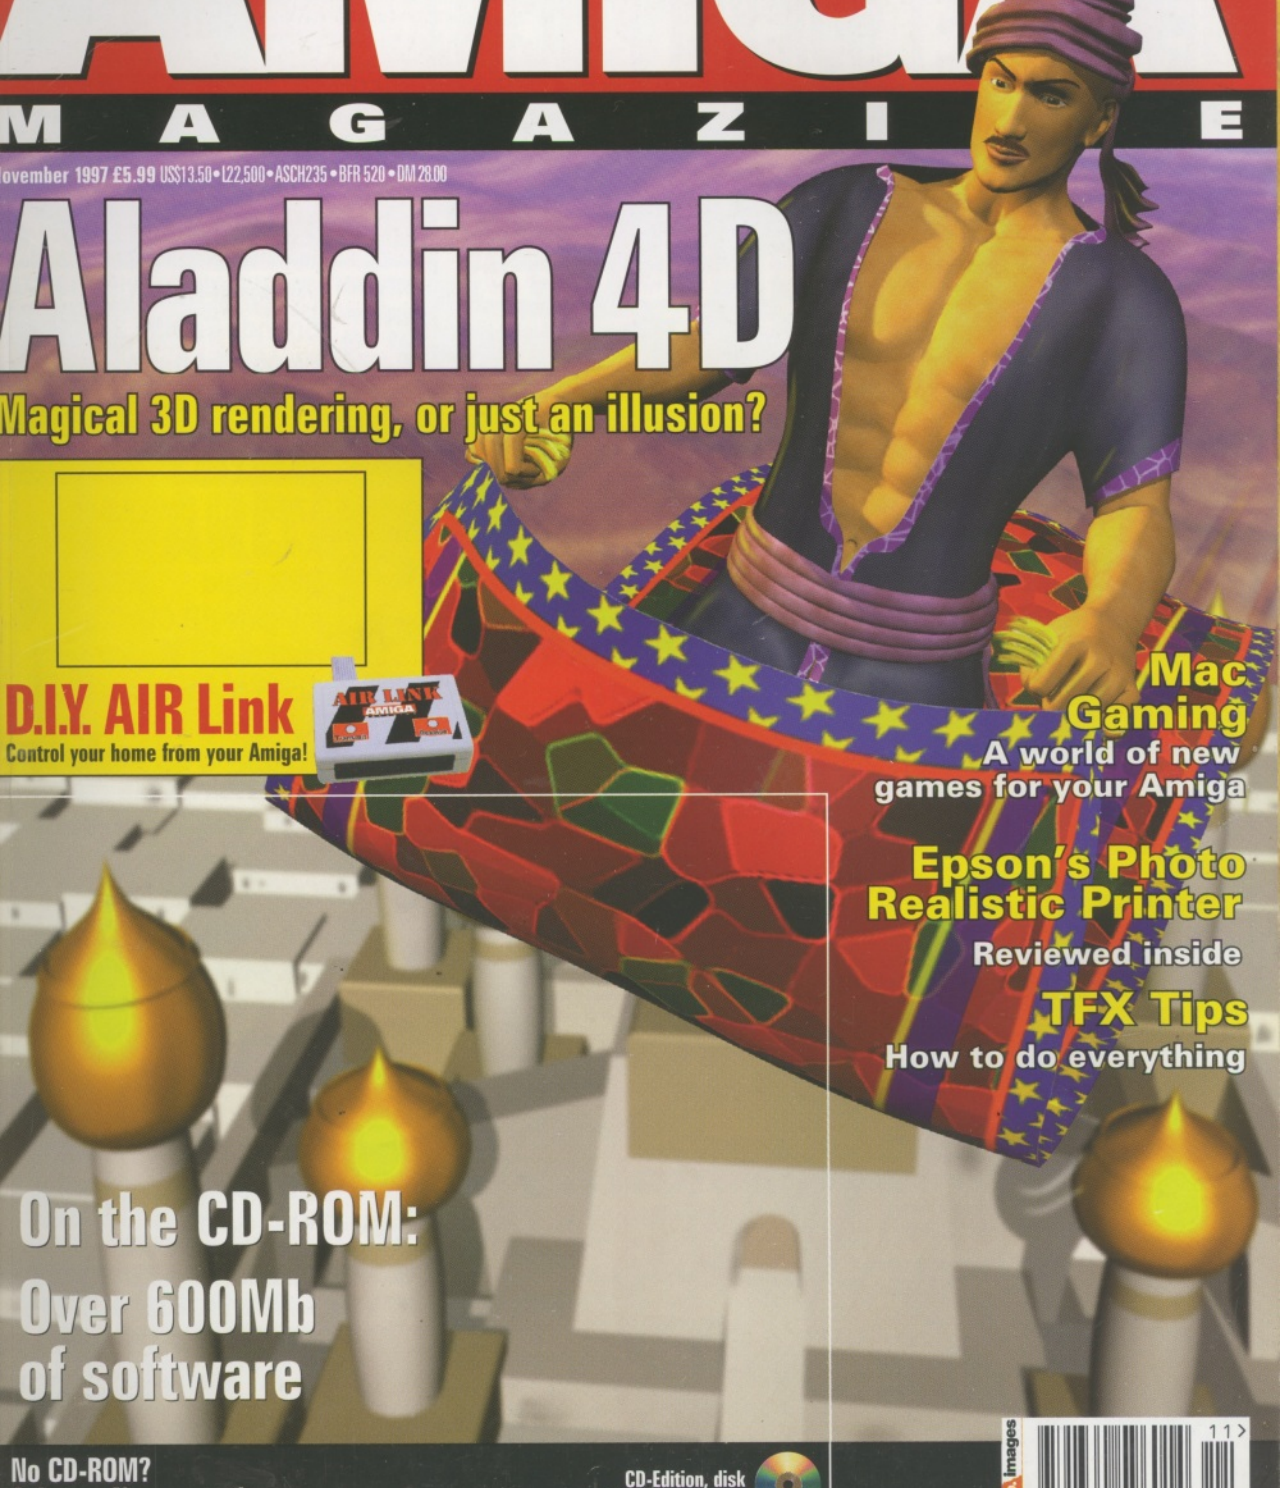

Aladdin 4D

Magical 3D rendering, or just an illusion?

D.I.Y. AIR Link

Control your home from your Amiga!

Mac Gaming

A world of new games for your Amiga

Epson's Photo Realistic Printer

Reviewed inside

TFX Tips

How to do everything

On the CD-ROM:

Over 600Mb of software

No CD-ROM?
Ask your Newsagent!

CD-Edition, disk version also available

emap. images
11
9 771360 596014

Weird Science

NEW ADDRESS Q HOUSE, TROON WAY BUSINESS PARK,
HUMBERSTONE LANE, LEICESTER. LE4 9HA

Phone 0116 246 3800
Fax 0116 246 3801
Email sales@weirdscience.co.uk
WWW www.weirdscience.co.uk

NEW AMINET BOX SET PRICES.

AMINET SET 5
AMINET SET 4
AMINET SET 3
AMINET SET 2
AMINET SET 1

£27.99 £27.99 £15.99 £15.99 £15.99

AMINET CDs

AMINET 21
AMINET 20
AMINET 19
AMINET 18
AMINET 17

ALL ONLY £10.99 EACH

EACH AMINET CD FOR ONLY £9.99 UPON RELEASE BY JUST REGISTERING FOR A SUBSCRIPTION AS EACH NEW CD IS RELEASED WE WILL CHARGE YOU AND DISPATCH YOUR NEW AMINET CD ON THE DAY OF UK RELEASE.

P.OS PRE-RELEASE
£19.95

Comes complete with p.OS workbench, Powerful p.OS shell, easy to use p.OS filer and p.OS DOS.

P.OS pre-release needs Amiga Kickstart v 2.0 to run

Includes demos such as various WB games, fractal demos and many more.

With its impressive visual icons this system becomes a joy to use for both the beginner and the more advance Amiga user.

Also upgrade this version to the final release without having to pay more than the price difference.

GIGA GRAPHICS
£9.99

GEEK GADGETS
£12.99

GEEK GADGETS 2
£12.99

AMIGA DEVELOPERS CD
£10.99

AMIGA REPAIR KIT
£34.99

MAGIC PUBLISHER
£29.99

MODS ANTHOLOGY
£22.99

ERIC SCHWARTZ CD
£19.95

SYSTEM BOOSTER
£9.99

EURO CD VOL. 2
£11.99

CALLERS WELCOME
NEW SHOWROOM NOW OPEN
SEE THE POWER PC CARD UPON RELEASE

£14.99 EACH

- Personal Suite CD
- Sounds Terrific 2
- Women of the Web
- Light Rom Gold
- Card Games CD
- 17 Bit LSD 3
- 17 Bit 5th Dimension
- Amos PD CD
- UPD Gold
- Imagine PD CD
- Multimedia Backdrops
- Sci Fi Sensations 2
- Assassins CD Volume 2

£9.99 EACH

- 1,078 Weird Textures
- 3,000 Jpeg Textures
- Dem Rom
- Magic WB Enhancer
- NFA Utilities Experience
- NFA AGA Experience 2
- Scene Storm
- Zoom 2
- Oh Yes! More Worms
- Octamed 6 CD
- Clip Art CD
- 3DCD-2 Images
- Retro Gold

TRADE & RETAIL DISTRIBUTORS FOR GTI, SCHATZTRUHE, CLOANTO, GRAPHIC DETAIL, INTERACTIVE, EPIC, SADENESS, PD SOFT, HISOFT, VULCAN, GUILDHALL LEISURE, AND AMIGA INTERNATIONAL

International Distributor: G.T.I.

SCHATZTRUHE


PC
NETWORK
AMIGA GOLD FORMAT
Weird Science

NETWORK PC

Access all of the PC Drives.
Read & Write to & from the PC.
Load files directly from the PC.
Up to 49k/sec for Amiga > PC.
Up to 29k/sec for PC > Amiga.
Easy Installation for Amiga & PC.
Requires WB2.04+ & Windows 95.

THE DEFINITIVE AMIGA TO PC LINKUP SYSTEM JUST GOT BETTER

NEW COMPANION CD-ROM NOW INCLUDED

Network PC includes a 3m Cable, Installation disks for both computers, detailed manual and a companion CD-ROM. The CD contains utilities for the Amiga & PC and the Amiga Emulator for Windows 95 with games & demo files.

£17.99


Fontamania!

Contents
1919 Adobe
767 Bitmap
228 Calamus
1105 CG Fonts
244 Coloured
300 GDos
175 Iff Pics
918 Intellifont
139 Pagestream
173 ProDraw
1658 Ps Fonts
1477 True Type
1562 Type 1

Fontamania £9.99

£29.95
PERSONAL PAINT 7.1

£29.95
KARA COLLECTION

£19.95
AMY RESOURCE

£14.99
NETWORK CD 2

£19.95
HIDDEN TRUTH

THE EPIC INTERACTIVE ENCYCLOPEDIA
£19.95
ENC. OF PARANORMAL

£14.99
EPIC COLLECTION 3

£14.99
NFA AGA EXPERIENCE 3

£29.95
SCALA PLUG IN

INTERACTIVE ENCYCLOPEDIA
NEW
£19.95
EPIC ENCYCLOPEDIA

LIGHT-ROM GOLD
£14.99
LIGHT ROM GOLD

£19.95
LIGHT ROM 4


3 CD Set
LIGHT ROM™
5
COVER BY MICHAEL BEALS
£29.95

AWARD WINNERS

3
ASSASSINS
AMIGA GOLD FORMAT
AMIGA SUPERSTAR

ASSASSINS CD 3
£19.95

Weird Science
AGA Toolkit '97
AMIGA SUPERSTAR

AGA TOOLKIT '97
£9.99

THE LEARNING CURVE
AMIGA SUPERSTAR

LEARNING CURVE
£19.95

GAMES

£19.95
NEMAC IV

TINY TROOPS

MANYK MAYHEM

DESERT STRIKE
ELECTRONIC ARTS


Valhalla
Lord of Infinity

£19.95
TRAPPED 2

The STRANGERS
£19.95
STRANGERS

THE BIG RED ADVENTURE
£19.95
BIG RED ADV.

ARCADE ACTION £12.99
ACID ATTACK £12.99
BURNOUT AGA £16.99
BOGRATS £12.99
BREATHLESS £12.99
COLOSSUS CHESS £4.99
DESERT STRIKE £8.99
F15 STRIKE EAGLE £12.99
F19 STEALTH FIGHTER £12.99
F17A NIGHTHAWK £8.99
MICROPROSE GRAND PRIX £12.99
FORMULA 1 MASTERS £19.99
HILLSEA LIDO £12.99
IMPOSSIBLE MISSION £8.99
JET PILOT £16.99
CIVILISATION £12.99
MANYK MAYHEM £12.99

MINSKIES £8.99
ROADKILL £4.99
ROAD RASH £8.99
SENSIBLE SOCCER £19.99
SUPER SKIDMARKS £8.99
TESTAMENT £16.99
TIMEKEEPERS £ 12.99
TIN TOY ADVENTURE £24.99
UFO £12.99
VALHALLA 1 £14.99
VALHALLA 2 £14.99
VALHALLA 3 £16.99
VIRTUAL KARTING £8.99
WORMS £24.99
CAP. PUNISHMENT £24.99
XP-8 £8.99
VENDETTA £16.99

HARDWARE

BLIZZARD
ACCELERATOR SERIES

BLIZZARD 1230-50 £99.99
50MHz CO-PRO £39.99
BLIZZARD 1260-50 £329.99

CYBERSTORM PPC 200 MHz
WITH 68060-50 £849.99

PICASSO IV GFX CARD
£279.99

CLASSIC Squirrel
The SCSI Interface for your Amiga 600/1200

SQUIRREL SCSI £54.95 SURF SQUIRREL £89.95
DUAL SPEED CD-ROM DRIVE & SQUIRREL £99.99
QUAD SPEED CD-ROM DRIVE & SQUIRREL £139.99
12 SPEED CD-ROM DRIVE & SQUIRREL £199.99
2 BUTTON MOUSE £8.99 3 BUTTON MOUSE £10.99
COMP. PRO. JOYPAD £16.99 CD32 JOYPAD £7.99
EXTERNAL FLOPPY £39.99 EXT. 33.6 MODEM £74.99
WHIPPET £44.95 SIAMESE RTG. £179.99

CALL FOR A FULL LIST OF HARDWARE

INFINITIV AMIGA

1300 £349.99
1400 £469.99
1500 £599.99

1.2gig Hard Drive & 10 Speed CD-ROM extra £150.00

INFINITIV TOWER KIT £159.95
ZORRO II SLOTS £149.95
ZORRO III SLOTS £319.95
3.5" SNAP ON BAY £11.95
PCMCIA ADAPTER £29.95
KEYBOARD CASE £39.95

TELEPHONE ORDER HOTLINE

0116 246 3800

VISA SWITCH

UK POSTAGE IS £1.00 FOR THE FIRST ITEM AND 50p EACH EXTRA ITEM, OVERSEAS IS DOUBLE.

WE WILL PRICE MATCH ANY ADVERT IN THIS MAGAZINE

CU AMIGA MAGAZINE

NOVEMBER 1997 • CONTENTS

Editorial

EDITOR	Tony Horgan
ART EDITOR	Helen Danby
TECHNICAL EDITOR	Mat Bettinson
STAFF WRITER	Andrew Korn
PRODUCTION EDITOR	Russell Cox
CD-ROM COMPILER	Neil Bothwick
TECHNICAL CONSULTANT	John Kennedy
ADDITIONAL DESIGN	Gordon Barrick
CONTRIBUTORS	Jason Compton, Tony Gill, Larry Hickmott, Jason Hulance, Harv Laser, Dhomas Trenn
COVER ILLUSTRATION	Roger Harris
PHOTOGRAPHY	Ben Jennings
SCITEX MANAGER	Sarah Best
SYSTEMS MANAGER	Sarah-Jane Leavey

Advertising, Marketing & Management

EXECUTIVE PUBLISHING DIRECTOR	Sarah Janes
PUBLISHER	Andy McVittie
GROUP AD MANAGER	Liza Merrett
SOFTWARE MANAGER	Chris Perera
SENIOR SALES EXECUTIVE	Marianna Masters
AGENCY SALES EXECUTIVE	Genene Dick
SALES EXECUTIVE	Justin Wakeham
AGENCY SALES MANAGER	Paul Lanzarotti
PRODUCT MANAGER	Kirstin Ritchens
MARKETING EXECUTIVE	Zoe Wharnsby
PRODUCTION MANAGER	Sam Lee
AD PRODUCTION MANAGER	Emma Minford
AD PRODUCTION EXECUTIVE	Natasha George
ADVERTISING ASSISTANT	Annabel Green
FACILITIES MANAGER	Robert McBride

CU Amiga Magazine
37-39 MILLHARBOUR, ISLE OF DOGS,
LONDON E14 9TZ, UNITED KINGDOM
0171 972 6700
GENERAL@CU-AMIGA.CO.UK
WEB SITE: www.cu-amiga.co.uk
SUBS ENQUIRIES: 01858 435350
ADVERTISING PRODUCTION FAX: 0171 972 6755

Contacts

READERS' LETTERS AND TECHNICAL PROBLEMS: For general, non-technical, enquiries send your letters to the address above clearly marked for **BACKCHAT**. For technical problems send them clearly marked **Q&A**. Because of the nature of many enquiries they cannot be answered by phone. You can E-mail us at **backchat@cu-amiga.co.uk or Q+A@cu-amiga.co.uk.**

PD REVIEWS: We get hundreds of new PD programs every week, but we're still hungry for more. If you've written a PD program that you're proud of send it to: **PD SUBMISSIONS, CU Amiga Magazine, 37-39 Millharbour, Isle of Dogs, London, E14 9TZ.**

ADVERTISING OR ADVERTISING PROBLEMS: If you wish to advertise in CU Amiga Magazine, please contact **Marianna Masters** on the above telephone number and address. Contact **Annabel Green** if you have a query regarding any advertisement in CU Amiga Magazine.

COVER DISK PROBLEMS: If you have a faulty cover disk then write or return your disk to our duplicators: **DISKXPRESS, 7 WILLOW COURT, BOURTON INDUSTRIAL PARK, BOURTON-ON-THE-WATER, GLOUCESTERSHIRE GL54 2HQ. TEL: 01451 810788.**

COMPETITIONS: CU Amiga Magazine often runs competitions. To enter one of these simply put your name and address on the back of postcard, along with the answers and send them to us at the usual address (unless otherwise stated in the competition). Competition entries are only accepted by post. One entry per person please and the editor's decision is final. Winners will be notified by post. Other rules may be printed from time to time.

BACK ISSUES: 01858 435 350. Subject to availability. DD disk issues: UK price £5.99 (inc P&P). Rest of world £6.50. CD-ROM issues: UK price £6.99, Europe and Rest of world £7.50.

SUBSCRIPTION DETAILS: Subscriptions are available from Tower Publishing, Tower House, Sovereign Park, Lathkill Street, Market Harborough LE16 9EF Tel: 01858 435 350 . Annual subscription rates (inc postage) 12 issues: UK/BFPO £54. SURFACE MAIL ROW & EUROPE: £60.00. AIRMAIL EUROPE £70.00. ROW AIRMAIL £90. See subs page for special offers.

© EMAP Images 1997. No part of this magazine may be reproduced in any form, either electronic or mechanical, or sold without the express written permission of the publisher. Cover disks remain the copyright of their respective suppliers and may not be duplicated, distributed or sold on without their permission. All material and prices are believed to be accurate at the time of going to press. CU Amiga Magazine attempts to maintain the highest standards, but cannot be held responsible for any errors, factual or otherwise which may have inadvertently crept into the issue. None of the reviews or previews in any section of this magazine constitute paid for or otherwise solicited advertisements for that product or supplier. CU Amiga Magazine is an independent publication and the opinions expressed by its reviewers are their own, free of any outside encumbrance.

PRINTED IN THE UNITED KINGDOM BY SOUTHERN PRINT WEB OFFSET, POOLE.
COVER DISK AND CD-ROM DUPLICATION BY DISKXPRESS

ABC January-June 1997 27,391

emap. images

Editorial

Ain't no stopping us now, as a cheesy old disco band once sang. Now we've got used to doing exciting new things with CU Amiga we just can't stop. Last month it was TFX, and this month we've gone and stuck a circuit board on the cover! It's all part of our drive to revive your Amiga use, push it to new levels and make it do things you never thought were possible. If no-one else is going to do it, we're not going to sit around doing nothing but whinge about the situation – we'll do it ourselves. If there's anything you'd like from us, however far fetched or daft it might seem, let us know and we'll do all we can to make your wish come true.

Tony Horgan, Editor

Lead review

50 Aladdin 4D V5.0

You might have thought all the big applications were being phased out of Amiga development, but Nova Design have refused to follow that well trodden path. Instead, the developers of the mighty ImageFX have taken over development of Aladdin 4D, a poweful 3D rendering system that was left floundering after its original creators jumped ship. With Amiga 3D rendering virtually polarised into the separate professional and hobbyist camps (occupied by LightWave and Imagine respectively), this could be the package that once again unites Amiga artists at all levels. A three-pronged attack of professional features, a re-vamped user interface and a reasonably affordable price point could just make this the most important Amiga software release of the year.



D.I.Y. Scene

28 D.I.Y. AIR Link

You're probably wondering what that circuit board is doing stuck to the front of your mag. It's the basis for this month's D.I.Y. project 'AIR Link', the best, most versatile and easiest D.I.Y. widget ever! This is what it looks like when you've got all the bits and put it together. Cool eh? When you plug this little gizmo into your joystick port, your Amiga will be transformed into an intelligent infra red controller and receiver, with the ability to respond to a wide variety of common household infra red remote control handsets. What's more, it can transmit too! So not only can you control your Amiga from your armchair, you can control any other infra red device from your Amiga! The possibilities are endless, and this project is too easy to make, absolutely anyone who can touch a soldering iron on a pin can put one together in minutes!

AIR LINK
AMIGA
Transmit
Receive

News

16 All the latest developments on the Amiga scene, plus Stateside.

Games.......................................35

Reviews:

37 Sensible Golf
37 Blitz Tennis
38 Street Racer
40 Trapped 2
42 Dune 2

Tips:

43 TFX Players Guide
46 Tips Central
47 Capital Punishment Special

Tech Scene.................................49

50 Aladdin 4D
58 Hydra A1200 Ethernet
58 Envoy 2.0
59 OxyPatcher
61 Visual IFX
62 Epson Stylus Photo
64 PD Scene
66 PD Utilities
70 CD-ROM Scene
72 Art Gallery

Workshop..................................75

76 Imagine 4.0
79 Amiga C Programming
81 Next Month
82 Wired World
84 Net God
85 Surf of the Month
86 Back Issues
88 Sound Lab
90 Desktop Publishing
94 Reader CD-ROM contributions
96 Q&A and A to Z
100 Backchat
103 Subscriptions
104 Points of View

Trapped 2 40

Sensi Golf 37

MENU
OPTIONS
Credits
Dune 2 42

TFX Tips 43

Visual IFX 61

CD-ROMS 70

Epson Stylus Photo 62

OxyPatcher 59

Cover disks

8 Draw Studio 2 Lite

The most versatile and professional illustration package the Amiga has ever seen is here in a fully useable 'Lite' version, with almost all the features from the full commercial release, including full project saving and printing, combining the best of advanced structured art with bitmap graphics.

AMIGA
MAGAZINE
Super
CD-ROM 16

32 AIR Link software

All about the software side of this month's brilliant D.I.Y. project.

14 Super CD-ROM 16

Another 100% full CD with all the best and latest Amiga software. Far too much to list here, so check out page 14 for more.

AMIGA
Draw Studio 2 Lite
AMIGA
AMIGA
AIR Link Software
AMIGA

See You Online!

Get more from CU Amiga with CU Online. Now even bigger and better than ever, CU Online is full of all the latest breaking news, features, links, downloads, inside information and support for all Amiga users. You can contact the team, have your say in our online surveys, take out a subscription, join the CU Amiga Internet mailing list, probe the all new back issues article database and much more. All of this comes in one of the fastest, most Amiga friendly sites you'll encounter, so what are you waiting for? See you there!

- **Late breaking news**
- **Exclusive online features**
- **Stacks of downloads**
- **Fast Amiga-friendly design**
- **Links to quality Amiga sites**
- **Contact the team**
- **Full back issue database**



September - 82470 visitors to date *

Last changed: Tuesday 16-Sep-97

Welcome to CU Amiga Online! You can find a new Amiga Inc. developers recruitment drive and details of our brand new revolutionary DIY project in the news section. If you're looking for something in particular, check out the CU Amiga online database. We'd also be greatful if you take time to fill out our new DIY poll. There's also a fantastic new **12 for the price of 9** subscription offer! The October 1997 issue (With TFX!) is at all good newsagent's now, the contents listing can be found in the contents section, enjoy!

Tony

Tony Horgan - Editor of CU Amiga Magazine

Your guide to CU Online

News The most updated section of CU Online, this section regularly has news and important events added.

Contents Here you can find the contents of the current issue of CU Amiga along with hints on the next issue.



sound/audio etc and general editorial matters.

Favourite 'Things' Split screen VW vans, TB303s (it's a keyboard), pasta, chips and cheese. Not to mention clubbing.

Favourite Drinks Non Alcoholic: Cream soda
Alchoholic: Lager, plenty of it.

Favourite Music Techno and House. Lots of techno/dance labels such as; (He can't think of any)

Mat Bettinson - **Technical Editor of CU Amiga Magazine**

Contact Contact Mat about the cover CDs, Comms (including the Web site) and technical matters, reviews and freelance.

Favourite 'Things' Mucking about with Amigas, gadgets and electronics. Online gaming. Erm, online everything. Travelling regularly hopefully to windsurf and dive.

Favourite Drinks Non Alcoholic: Percolated coffee with no poofler powder
Alchoholic: Whiskey, Bitter, Stout or G 'n T depending on the mood.

Favourite Music Varied. Some of which; Mike Oldfield, Stevie Ray Vaughan, Pink Floyd, Queen etc, female vocalists and melodic techno.

Andrew Korn - **Staff Writer for CU Amiga Magazine**

Contact Contact Andrew for News, reviews and features, games, public domain,

Favo 'Thin

Coverdisks and CD-ROM

TFX!
Note: TFX is only on the cover CD-ROM hence the range of applications for listed here for the floppy disks. There is an in-magazine coupon to allow ordering of the 7 floppy disk TFX set for £4.00.
Visual Prefs
Customise your Workbench and GUIs like you never thought possible.
Video Easle
Unique and exciting 'Cellular automa' animations.
Virtual TB 303 emulator
A TB303 analogue synthesizer for the Amiga.
Virus Z
Free your disks of destructive viruses with this latest virus exterminator
Super CD-ROM 15
This month's CUCD is even more amazing than normal! The full version of the legendary TFX and 100% full 650MB of other wonderous goodies make up CUCD15.

Games & Entertainment

- **OnEscapee: Interview**
- **The Shadow of the Third Moon preview**
- **Strato Racer preview**
- **Civilization CD review**
- **Gunship 2000 review**
- **Railroad Tycoon review**
- **Strangers AGA review**
- **Tips Central**

Tech Scene - Reviews

www.cu-amiga.co.uk

FREE NEXT DAY DELIVERY*

ON ALL ORDERS. FOR 1 MONTH ONLY

siren

TOTAL SCSI CD-ROM DRIVE

NO EXTRAS NEEDED ...JUST PLUG IN & GO!!

Fully featured SCSI CD-ROM drive for use with the A1200 or A600 including:

- Superb metal enclosure with in-built mains power supply
- All software, cables and instructions for immediate use
- Full CD32 emulation and Audio CD player software.
- Easy PCMCIA fitting Squirrel interface

Prices include Squirrel. Add £30.00 for Surf Squirrel

4 SPEED ONLY	£129.99
8 SPEED ONLY	£169.99
12 SPEED ONLY	£184.99

STAR VALUE

APOLLO A1200 ACCELERATORS

APOLLO 1230 LITE

High quality low cost 68030 accelerator with:

- MMU and FPU all running at 33mhz.
- Built in battery backed clock.
- Easy trapdoor fitting.
- 4MB.

AMAZING PERFORMANCE FOR SUCH A LOW PRICE!!

INCLUDES 4MB FREE!!

APOLLO 1230 PRO

All the features you asked for at an affordable price!:

- High performance 68030 with FPU and MMU running at 40mhz.
- Two 72pin SIMM sockets can take upto 32mb each. Simms can be mixed (i.e.a 4mb and 8mb will give 12mb) and can be single or double sided.
- Fully PCMCIA compatible regardless of how much memory is fitted.
- Easy trapdoor fitting with battery backed clock

APOLLO 1240/1260

68040/68060+MMU based A1200 accelerator.

Features include:

- Battery backed clock.
- 72 pin socket for a standard 72 pin SIMM (up to 128mb).
- Fully featured, fan cooled trapdoor fitting accelerator.

APOLLO 1230 LITE	£99.99
APOLLO 1230 PRO	£129.99
APOLLO 1240/25	£164.99
APOLLO 1240/40	£224.99
APOLLO 1260/50	£339.99

STAR VALUE

4MB SIMM	£19.99
8MB SIMM	£39.99
16MB SIMM	£79.99
32MB SIMM	£159.99

TOTAL MEMORY EXPANSIONS

NEARLY DOUBLES THE SPEED OF THE A1200!!

A1200 trapdoor fitting memory expansions feature:

- A battery backed clock
- A socket for an accelerator FPU

Unlike other memory expansions that conflict with the PCMCIA port, our TOTAL memory expansions include unique software that will enable the maximum amount of memory to be used even with a PCMCIA fitting device.

4MB MEMORY EXPANSION	£69.99
8MB MEMORY EXPANSION	£89.99
33MHZ 68882 FPU (PLCC)	£19.99

STAR VALUE

HARD DRIVES

Our high speed 2.5' IDE hard drives for the Amiga A1200 & A600 computers come complete with:

- Fitting cable, screws, partitioning software, full instructions
- 12 months guarantee.
- All drives supplied by us are formatted, partitioned and have Workbench (WB2 for the A600 and WB3 for the A1200) installed for immediate use.



STAR VALUE

Fitting is incredibly simple; if you can plug the mouse into the mouse socket, you can plug the hard drive into the hard drive socket.

FREE WHILE-YOU-WAIT FITTING SERVICE FOR PERSONAL CALLERS. PLEASE PHONE FOR APPOINTMENT.

FREE 'HOW TO FIT YOUR HARDDRIVE' VIDEO & STAKKER DISK

85MB	£84.99
340MB	£109.99
540MB	£139.99
810MB	£149.99
1000MB	£174.99
1600MB	£204.99

ALSO AVAILABLE

A600/A1200 INTERNAL FLOPPY DRIVE	£44.99
MOUSE	£12.99
3.5' HARD DRIVE CABLE	£17.50
2.5' HARD DRIVE CABLE	£9.99
FRESH FONTS CD	£19.99
AMIGA POWER SUPPLY	£34.99
SQUIRREL	£49.99
SURF SQUIRREL	£89.99
CLOCK CARTRIDGE	£19.99
EPIC ENCYCLOPEDIA CD	£19.99
50mhz FPU (for blizzard 1230)	£44.99

WORLD OF A1200 CD and TOP 100 A1200 GAMES CD £14.99 EACH *or* both for £19.99.

ANTI-VIRUS & X-COPY £19.99 EACH *or* both for £24.99

Order NOW for immediate despatch

FREEPHONE 0500 340548

(credit/switch card sales only).

For enquiries **Tel: 0161 796 5279 *or* Fax: 0161 796 3208** Access, Visa, Switch, Delta, Connect etc accepted **Send cheques or postal orders (made payable to Siren Software) or credit card details to:-SIREN SOFTWARE, 178 BURY NEW RD, WHITEFIELD, MANCHESTER M45 6QF, ENGLAND.** All prices include VAT. Postage and packing will be charged at £3.50 per order (U.K.), £7.50 Europe and £12.50 rest of the world. ***OPEN:* Monday to Friday 9am to 6pm Saturday 9am to 12pm** *Personal callers welcome. Please phone first to check availability of any item.* ***DIRECTIONS:*** From the M62 Junction 17 head towards Bury. We are 50 yards on the right hand side after the third set of lights. The door to our premises is next to Polar, opposite The Masons Pub.

****Next working day. Orders must be placed before 2p.m. All orders will be placed on a 24hour delivery service. Siren Software are not responsible if deliveries take longer than 24hours. Only applies to items in stock. U.K. delivery only.***

DISK 168

DrawStudio Lite

AMIGA
DISK 168
Draw Studio 2 Lite
FULL PROGRAM
AMIGA

Draw Studio 2 Lite is an exclusive fully functional illustration and structured drawing package from the creators of the excellent Image Studio. With Draw Studio you can create everything from business cards to Internet web page graphics.

Loading instructions

Installing Draw Studio 2 Lite is straightforward procedure, all we need is a hard drive to install to. Insert floppy disk marked CU168 and open it via Workbench. Don't try to boot either of the disks since they are only accessible via Workbench. Click on the Install_DrawStudio icon and a file requestor will appear. Select a place on your hard drive and press OK. The installer will decompress the Draw Studio archive on the first disk, then it will prompt you to insert floppy dsk CU169. Do so and the installer will continue to decompress the Draw Studio components. If you are warned that you don't have MUI installed, you'll need to obtain a copy of MUI from a PD house or LH Publishing 01908 370 230. To run Draw Studio just click on the appropriate FPU or non FPU version.


DrawStudio Lite ©1995-1997 Graham Dean, Andy Dean. V2.0.0 Lite (Aug 31 1997)
new for the Amiga
DrawStudio
LITE
Page 1
Layer 1

▲ DrawStudio Lite is a fully functioning special edition of the award winning illustration package, which combines bitmapped and structured graphics in a unique manner.

In September of 1996, LH Publishing released an illustration package by Graham and Andy Dean that was to receive many awards from the world's Amiga press. Now CU Amiga gives you a very special version of this fully functioning application. DrawStudio Lite requires MUI (Magic User Interface). This package provides many of the bits and pieces for DrawStudio's interface and without it, DrawStudio won't run. Once you

Are structured formats the best?

The one question which will soon come to mind is "why isn't there an export DR2D or support for other structured formats. The reasons are many and varied but the main one is down to compatibility. Look at all the programs on the Amiga and you will see that most support different structured formats and there is only one format that is supported across the board and that is IFF-ILBM.

For those that must use structured formats, Metaview will soon we are told, support DrawStudio's format, so conversion between many formats will be possible but if you want the best quality with support for all of DrawStudio's awe inspiring features, then you use IFF-ILBM. You might not know for example, but most – if not all – structured formats do not support bitmap fills and transparency.

So if you created an image with those elements, even if DrawStudio Lite supported the many structured formats available, you wouldn't be able to have those elements in your image. This is why images created in DrawStudio should be handled in two ways.

One is to print them direct from DrawStudio and the second is to export the image as a bitmap. That way, your image can be used in any Amiga (PC and Macintosh too) program that supports the bitmap format you have chosen when exporting the image.

DrawStudio Lite supports by the way, most popular bitmap formats such as JPEG, IFF-ILBM, GIF, BMP, PCX andTIFF.



▲ Create a box like this using the Box Tool. Holding down the shift key constrains the shape to a square. Click the right mouse button while drawing the shape aborts the task.



▲ With the rectangle selected, choose the Object/Attributes menu item. Click on None for Pen Colour. Under Fill Colour, click on Bitmap, then on Edit. This brings up the Bitmap Fill List. Click on Edit and in the Edit Bitmap Fill requester, click on New and load an appropriate bitmap. Give the bitmap a name and click OK and OK on the Bitmap Fill list and then OK to apply the attributes.

Converting between graphic formats

When you want to open structured images, the format supported by Draw Studio Lite is DR2D-IFF. You may find though that not all your images are in that format. You may have a lot of Proclips or WMF files. A shareware program called Metaview is what you need and there is a version in the DS_Lite_Extras drawer on the CUCD.

Using Metaview, you can load a WMF file and convert it to a DR2D-IFF for use in Draw Studio. It can also save out files in CGM format, useful for Wordworth owners. I should also mention another utility worth its weight in gold and that's called Convert. It's from those folk at Soft-Logik, publishers of PageStream 3, and converts ProClips from ProDraw into DR2D-IFF files which just happen to load into DrawStudio Lite as well.



▲ Metaview is an excellent shareware utility for converting between structured formats. It supports WMF, DR2D-IFF and CGM among other types.

Display tips

When you open the Display requester, you will see a number of display types from 24-bit to 1-bit. If you are working with images containing thousands of colours, and you want to see all the fancy effects like transparency, then select 24-bit. If on the other hand, the images you are creating are simply black and white (no greys), then 1-bit is more appropriate. In between are 8-bit colour and greyscale.

With 8-bit colour selected, you won't see any transparency effects and if your imagery is in grey, then the best mode is 8-bit greyscale. The display can also be changed by choosing one of the options from View/ReDraw Level. These range from Full where you see all the effects and colours possible under your chosen screen-mode to a wireframe mode.



▲ The type of display you get with Draw Studio Lite depends on the redraw level selected from the View menu. Here we see the wireframe mode.

have MUI installed, you can run Draw Studio Lite.

It is worth noting that MUI is not Magic Workbench and will not affect programs that do not require it. It will also not use any extra memory until an application that requires the MUI libraries is run. Above all, MUI is not a program that is run and so anyone who is worried about installing MUI should not be. All it does is take up a few megabytes of disk space and because it can be installed on any partition, that shouldn't be any reason for not installing it.

Screen modes

By default, Draw Studio is set to run on a High Res screen and if you run a screen mode such as Productivity, then you will first need to change the screen mode before going onwards. Remember that for non-video modes you will need a capable monitor. The change of screen mode is achieved by going to the Settings menu on the right of Draw Studio's screen and choosing the Click on the Choose button and select the screen mode you want DrawStudio Lite to run in.

A little tip: if Draw Studio's screen is initially hard to see because of an incorrect screen-mode, then go to Workbench and drag it down so you can see Draw Studio Lite's screen. It will inherit the screen-mode of Workbench while you make any changes necessary. While still on the subject of settings, you might also like to choose Settings/Prefs to select the measurement units, screen dpi, JPEG export quality and much more.

Getting started

There are a number of ways you can begin the image making process. One is to Open (Project menu) an existing structured drawing and modify that within Draw Studio Lite. Your program supports the Amiga standard structured format of DR2D-IFF. Images in this format can be found on Aminet and other places or you can use an excellent piece of shareware called Metaview to convert other formats.

Draw Studio Lite will also open its own files of course. The Draw Studio format is the most comprehensive of all because it supports many things like bitmap fills, transparency and so on and that's something most structured formats like Illustrator 88, WMF, CGM and so on do not.

A second method of creating an image is to Place (Project menu) a number of image types onto the page. These formats include Draw Studio and DR2D-IFF files and many bitmap types like JPEG, IFF-ILBM, BMP, TIFF, GIF and PCX. The last method for image creation is to use the program's drawing and text tools to create something completely original. To do this, you'll need to understand some of the programs most important tools.

In the toolbox

Down the left of every project is the toolbox. This contains a number of useful tools for drawing straight lines, freehand lines, Bezier curves, rectangles with square and rounded corners, ovals and arcs. One of the most useful tools however doesn't require any talent because it lets you create text using outline fonts.



3

▲ Use the rectangle tool to place a box over three quarters of the main rectangle. Select it and choose Object/Attributes. Make Pen Colour None and under Fill Colour, click on Solid and Edit. In the Colour List, click on White and then on New. Click on Edit and in the Edit Colour requester, change the Opacity to 50%. Give the colour a new name and then click on OK three times.



4

▲ Click on the Text tool and stamp it down on the page. Type out some text and choose the Null Pointer. Now choose the Text/Font menu item and select the font you want and the size for your text. Notice from the screen grab you can have custom sizes for size and width. Apply the same bitmap fill attributes to this text as the rectangle in step 1.



5

▲ With the text still selected, choose the Effects/Rotate Left/90. With the text on the left of the picture, press Right Amiga-T to clone it. Give it a black fill. Repeat and give it a white fill. Place the two over the top of each other then place the text with the bitmap fill over the top. Use cursor keys to position the text and Right Amiga-[and] for shuffling the text objects under one another.



6

▲ Create a second piece of text and give it a similar bitmap fill to the last text. Notice how this text has been stretched. To do this yourself, select the text and grab the middle handle along the top or bottom edges. Now hold down the left mouse button while the pointer is over the handle and pull the mouse up or down. When the text is the right height, let the left mouse button go.

Upgrade information

An even better Draw Studio? You may not think it possible but there is an even better version of Draw Studio you can upgrade to for a pittance. Version 2 of Draw Studio is everything your Draw Studio Lite is but with some extra bells and whistles.

To start with, Draw Studio 2 has a Text on a Curve feature that is perhaps the most powerful of all implementations ever seen of this function. Text can be wrapped around and inside curves, circles, squares and more. Like warping in Draw Studio Lite, there is a preview as well so you know just the effect you are going to get.

There's more though. As you will see when you Export or Print from Draw Studio Lite, the maximum colour depth supported is 8-bit or 256 colours. With Draw Studio 2 you can print in full 24-bit and if you have TurboPrint 5, this output goes direct to TurboPrint with no loss of quality. This lets you print gradients which are nice and smooth.

And speaking of quality, how about exporting images from Draw Studio in 24-bit colour with the option of anti-aliasing to smooth out all those curves for the absolute best quality you'll see on a bitmap. Version 2 of Draw Studio can handle all this and for those bitten by Draw Studio Lite's excellent features, the upgrade makes perfect sense.

If you want PostScript support, then Draw Studio V2 also supports this type of output including EPS. There's one more vital new feature in Draw Studio 2 and that is 24-bit display support for CyberGraphX users. With this, you'll be able to see your images in all their glory on screen before putting them to paper.

For £29.95, you can upgrade to version 2 and then start to really cook with Draw Studio. This includes a printed manual of course so you can get to grips with all of Draw Studio's great features. For a full list of the upgrades see the cut-out coupon opposite which lists all your options.

One word of note though. To take advantage of this great offer brought to you by CU Amiga Amiga Magazine and LH Publishing, you do need to return either the original coupon, or if you don't want to cut up magazine, your cover CD/ floppy disks with the order as proof of purchase. Any disks sent will of course be returned.



▲ To create full colour images, you can upgrade to version 2 of Draw Studio which supports 24-bit export.



▲ With the version 2 upgrade of Draw Studio, you can print in 24-bit to TurboPrint 5 so that gradients print smoothly and full colour images look photographic.



▲ The upgrade to Draw Studio 2 has a really powerful text on a curve function that allows you wrap text around and inside ovals, rectangles and curves.



▲ Version 2 of Draw Studio, the upgrade available through LH Publishing, supports PostScript export as well as the normal bitmap formats. This includes 24-bit export.

At the bottom of the toolbox are a number of icons that are attached to DrawStudio's unique pop-up palettes. These are a little difficult to describe so why don't you live dangerously and click on one. Clicking on a pop-up icon brings the palette up while clicking the same icon again, closes the palette. Clicking on an item in the palette also closes it, as well as applying that attribute to the selected object.

Getting your fill

This leads us to object fills and outlines. Every object, even text (once converted to a Bezier object) can have a fill and a different outline. Create a rectangle for example and that object's fill and outline can be a solid or transparent colour, a bitmap fill, a pattern, a gradient (using solid or transparent colours) or no fill or line colour at all.

Once you have an object on your page, it can be warped. Draw Studio Lite contains a number of preset warping styles with a slider enabling you to control the effect. If that isn't enough, you can click on Use Envelope and mould the object using control points. Here's a quick look at how to warp an object.

First make sure the object you want to warp is selected. Then choose Effects/Warp menu item. Next to the label Type is a cycle gadget or if you click on the right side of the gadget, you will notice a pop-up menu appear. When you have the type of warp you want, move the slider to get the effect. A preview on the right of the requester will show you roughly what you will see on your page. Now click on Warp. If the effect isn't what you want, choose Undo from the Edit menu and start again.

Shapely ARexx

Okay, perhaps ARexx doesn't have the same shapely appeal as Elle



▲ Create a new piece of text like this. Use the Fill Colour pop-up to apply the solid colour to the text.



▲ With the text just created still selected, press Right Amiga-T to create a Clone. This can also be done by choosing the Edit/Clone menu item. Apply to this text, the 50% white fill used in step 3 and offset the text as well as send it behind using the short-cut Right Amiga-[.



▲ Using the Straight Line tool, draw a line and use the Pen Colour Pop-up to give the line a colour. Click on the Line Ending pop-up to choose an arrow head for the line ending.



▲ In the top right of the image, draw a rectangle and give the box a yellow Pen Colour with a six point line weight from the Line Style tab and then apply a bitmap fill as well.


DrawStudio Lite ©1995–1997 Graham Dean, Andy Dean. V2.0.0 Lite (Aug 31 1997)

Display type: 24 Bit

Memory available: 12,117,290 bytes

Memory required: 950,400 bytes

Colour: Yes

Transparency: Yes

Gradient quality: High

Redraw speed: Low

Screen mode: MULTISCAN:Productivity

Width 640 Height 495

Depth 6

▲ **Before doing any work in Draw Studio, select the screen mode you most like to work in from the Display requester, which is brought on screen by choosing Settings/Display.**

"the body" McPherson but it (ARexx, not Elle!) can create shapes for you without you needing to sweat on how to create an eight-sided octagon. It's all done through a useful implementation of ARexx by the authors of Draw Studio Lite.

Simply choose the Rexx item from the Effects menu and from the list of effects, select one and click on Execute. The program will do all the hard work in creating the shape and then all you have to do is to use the place pointer to size and paste the drawing on your page. Creating bursts, triangles and so on need never be a chore again.

Your final steps

Once you have an image on your page, a final step is to save it. This is done using the Save item from the Project menu. You can however, do much more. One of these options is to select Print, also from the Project menu. The print mode supports 1-bit for black and white, 8-bit grey for 256 colour greyscale images and 8-bit colour. You can also select a range of pages to print. This is because, like a DTP package, Draw Studio Lite is page based and you can create any amount of pages for a set project. Another method of saving your work is to use the Bitmap Export item from the Project menu. As you know, most Amiga applications support bitmaps like IFF-ILBMs and others. Most do not though support structured formats like Draw Studio's own and DR2D-IFF.



▲ **With the box created in step 10 selected, press Right Amiga-T to clone it and then while holding down the shift key, size it down to fit inside the original. Choose the Effects/Rotate... menu item and rotate the box. Rotate the object right or left several times to create an effect like this one here.**

Because of this, Draw Studio Lite lets you export your images at a resolution of your own choice, in various bitmap formats. This allows you to get images from Draw Studio Lite into any package you want. You may remember that one of the problems with ProDraw was that very few programs (ProPage and PageStream) would actually load images in the ProDraw format. No such problems with Draw Studio Lite!

The key to exporting images that are going to print at the highest quality is to choose the resolution carefully. If for example, you are going to use a full colour image from Draw Studio Lite in your favourite word processor, then you could afford to export it at around 700 pixels wide for use three or four inches wide on the paper.

If you were exporting a black and white line art image, then you would choose to export at 1200 or so pixels wide and scale down the image in your word processor for the best printed quality. For more information, printed manuals and upgrades are available from the publishers, LH Publishing (01908 370 230). ■

Adding fonts to Draw Studio Lite

Draw Studio Lite uses PostScript Type 1 fonts and with that, only requires the ".pfb" file. There are a number of these outline fonts on the CUCD in Draw Studio's directory but you can also make use of those you may already have on your hard drive. Fonts can be in different directories and can be added one at a time or whole directories can be used. There is no limit to the number you can add.

Fonts are added by choosing Text/Font Manager. This brings up a requester showing the current fonts installed as well as a few buttons for adding and removing fonts. Any fonts chosen can be saved to the font list so they are always loaded to be used with Draw Studio ,or you can click on Use so the selected fonts are only available for that session with Draw Studio Lite.



▲ **By selecting the Text/Font Manager menu item you can add fonts to Draw Studio Lite. Just make sure the fonts chosen either individually or in a directory are PostScript Type 1 fonts.**

Draw Studio Lite Upgrade

AMIGA

Please rush me a copy of Draw Studio V2 at the prices listed below.

Send or fax voucher to:

LH Publishing, 13 Gairloch Ave, Bletchley MK2 3DH, Bucks, United Kingdom. Fax: +44 (0) 1908 640 371

Upgrade Prices

Draw Studio CD V2	£39.95
Draw Studio Floppy Disk V2	£29.95
Draw Studio Printed Manual	£6.99
Draw Studio Book/CD	£16.99
Draw Studio Book/Floppy disk	£13.99

Please note: Prices include UK 1st class postage. Shipping for other countries add... Europe: £3, Americas £5, Australia/NZ £6

Name:

Address:

:Postcode:

Daytime Contact Phone Number:

Order Method: (Please Tick Payment Method)

☐ Cheque ☐ Credit Card ☐ Cash ☐ Postal Order

Card Type:

☐ Mastercard ☐ VISA ☐ ACCESS ☐ EuroCard ☐ Other

Credit Card Number ☐☐☐☐☐☐☐☐☐☐☐☐

Expiry Date ☐☐☐☐ Issue No. ☐☐

Signature

Date

Please Note: Cheques/Postal Orders should be made payable to LH Publishing. Cheques should be in pounds sterling and drawn on a UK bank.

EPIC CD-ROMs

Amiga Specialists

OPENING HOURS
9:30am - 5:30pm
Mon - Sat
POSTAGE COSTS
£1 per title

UK orders
0500 131 486
overseas orders
+44 1793 490988
general enquiries
0 1793 514188
fax line
0 1793 514187
email
epicmarketing@dialin.net
posted orders
Epic Marketing
Epic House
43 Akers Way,
Swindon, Wilts,
SN2 2NF, UK

OPENING HOURS
ARVO - LATEpm
Mon - FRI
POSTAGE COSTS
$2 per title

Australian orders
02 9520 9606
posted orders
Epic Marketing
36 Forest Road,
Heathcote, NSW.
2233, Australia.

e-mail:
epic@swol.de
Telephone:
+49 0 7071 63525

German office
Epic - Paul Lechler
Strasser 4, 72076
Tubingen, Germany.

CREDIT CARD ORDERS WELCOME

All items are sold subject to our normal terms and conditions. E&OE
All prices include VAT. *Supplied on floppy disk.



World of Clipart Plus is a double CD-ROM containing **40,000** mono and colour clipart images. It includes over **100 categories** including: animals, people, vehicles/transport, food&drink, zodiac, xmas, cartoon, music, computers, technology, babies, women, men, dogs, cats, birds, office equipment, trees and dozens more. Most clips are IFF.

Order: CD77x UK : £14.99 - AUST : $36

WORLD OF CLIPART *All Amiga's*

Magic Workbench Enhancer is a stylish Amiga CD-ROM containing not only Magic Workbench but also around *10,000 new Workbench Icons, Backdrops and Desktop tools*. Enhance Workbench even more with this excellent CD.

Includes:
Magic Workbench - 10,000 New Icons - WB Backdrops
Desktop tools - WB Sounds
WB Games - WB Hacks

WorkBench

Magic WB

Order: CD187x UK : £14.99 - AUST : $36

WORKBENCH ENHANCER *KS 2/3*

AS SEEN ON TV

The Speccy CD 1997 includes around 3,000 all-time classic original Spectrum games and emulators to run them on the Amiga, This CD is a sinch to use. The faster your Amiga the better.

Order: CD403 UK : £14.99 - AUST : $30

THE SPECCY CD 1997 *Any*

The **Epic Collection 3** is a new Amiga CD containing around 600mb of the **very best Amiga software,** nearly all of it is usable directly for the CD. No need to de-compress it to disk.

Order: CD405x UK : £14.99 - AUST : $30

THE EPIC COLLECTION 3 *KS2/3*

The new Ami-PC Linkup set is a powerful new **Amiga to PC Networking package** that allows the Amiga to have **access** to ALL of your PC's drives including: ZIP, Hard disk, Jazz, CD-ROM etc. Win'95 is recommended on your PC, but isn't essential. The package includes everything you need including cables..

*This software is **supplied on an Amiga floppy disk.***
Call 0 1793 514188 for more info.

Order: CD461 UK : £17.99 - AUST : $36 SPECIAL!

Ami-PC Linkup^ NEW *KS2/3*

Amiga Desktop Video CD volume 2 contains hundreds of megabytes of Video related backdrops, fonts, samples, and clip images. The CD also includes a **full version of Scala**.

Order: CD404x UK : £9.99 - AUST : $20

Amiga Desktop Video 2 *KS2/3*

Amiga CD-ROM GAMES

Amazing New Amiga Games!

CIVILIZATION
£14.99

SIXTH SENSE
£29.99

NEMAC IV
£24.99

FLYIN' HIGH
£29.99

TRAPPED
£19.99

BIG RED ADV
£19.99

WENDETTA
£18.99

STREET RACER
£14.99

Super Skidmarks+
£14.99

Other Great CD-ROM titles available soon include:
GrandPrix Challenge - Gloom3? - Foundation and more.

*Other Applications**	
Deluxe Paint 5 -	£19.99
Mini Office -	£19.99
Blitz Basic2.1 -	£19.99
DOpus 5.5 -	£49
Easy Ledger 2.0 -	£119
GP Fax -	£44.99
Image FX 2.6 -	£179
PC Task4.0 -	£69
QuaterBack Tools -	£34
TurboPrint 5 -	£49
Inter Office 2 -	£19.99
P. Suite CD-	£19.99
P. Paint7 CD -	£29.99
PageStream2.2 CD -	£13
Print Studio -	£29.99
Amiga Repair CD -	£50
Scala CD (dtv2) -	£10

AMIGA DISK SOFTWARE *Various Amiga's*

HARD DISK PREP & INSTALLER
Allows you to partition your hard drive and install Workbench onto either a 2.5" or 3.5" hard drive. £7 (AHD7-2) for WB3 or (SHS7-2) for WB2.

SCANNER DRIVERS
Supports Epson GTxxxx, Hewlett Packard, Mirotek, Mustek, Highscreen flatbed scanners and many more.
Some drivers require certain spec Amiga's. £5 (SSD5-2)

ATAPI IDE SOFTWARE
Allows you to connect and run any standard PC IDE CD-ROM drive upto your Amiga. £3 (ATP3-1)

ZAPPO / ARCOS CD-ROM DRIVERS
Version 11.2 of the Zappo/Arcos driver software. £7 (AAZ7-2)

SOFT*MEM* SUITE
Soft*mem* makes you Amiga think it has tonnes of memory. It increases your memory to the desired amount. £5 (SMS5-1)

AMIGA PRINTER DRIVERS
Includes around 100 Printer drivers for use with Epson, HP, IBM, Star, Canon printers and many more. £3 (DRV3-1)

visit our new web site
www.globalnet.co.uk/~epic/

e-mail us
epicmarketing@dialin.net

THE EPIC ENCYCLOPEDIA 1997 *AGA, 4mb, Harddisk*

Order: CD262x UK : £19.99 - AUST : $40

The Epic Interactive Encyclopedia 1997 Edition is a completely updated product to the extent that it now includes around **16,000 subjects.** The new 1997 version of the **Epic Interactive Encyclopedia** is available now. It features a superb new updated multimedia interface, hundreds of film clips, images, sound samples and subject information text. The 1997 version now supports a multitude of new features inluding: Colour images, Full-screen film-clips, National anthems and a unique ***Inter-ACT***™ feature which allows you to interact with certain subjects like: Draughts, etc. A superb reference and educational title for the whole family.

Features Include
- ***16,000 articles** from Aachen to Zurich*
- ***Unique** Inter-ACT™ **feature***
- ***Updated interface** supporting colour images*
- ***Hundreds of film clips** small and large*
- ***Over 4,000 images** both b&w and colour*
- ***Dozens of new features***
- ***Music Styles** from country music to rave*
- ***Updated Explorapedia** now eight sections*
- ***Sound clips** animals to famous speeches*
- ***National Anthems** of dozens of countries*
- ***EURO-Pedia** information on Europe*
- ***Sound montages** styles of music, animals etc*
- ***Zoom into Animations** 4 times as large*

and much more.

AS SEEN ON TV
CU Amiga - 91%
Amiga User International - 90%
Amiga Computing - 90%
AMIGA SUPERSTAR

ARCADE CLASSICS Plus

Order: CD76 UK : £14.99 - AUST : $30

Arcade Classics Plus includes hundreds of variations of all the classic arcade games, such as *Pacman, Invaders, Tron, Galaxians , Frogger, Tempest, C64 conversions, Q-Bert, Trail Blazer, Scramble, Ping-Pong, Pengo, Missile command, Breakout, Bezerk, Donkey Kong, Tetris* and tonnes more great games.

Breakout

Defender

Asteroids

Pacman

Tetris

Tempest

Galaxians

Invaders

Encyclopedia '96
The 1996 Version of t
Epic Interactive
Encyclopedia. For an
2mb + Amiga Now £5

LSD Comp 1 A super
collection of tools, all
taken from the LSD
tools collection, plus lo
more. (CD18) £5

LSD Comp Two
Includes games, Dem
and utilities suitable fo
any KS2/3 Amiga.
(CD78) Only £5

Nothing But Gifs
Over 1,000 of the ver
best colour images, c
ering many different c
gories. - (CD197) £6

Insight Dinosaurs
Is an amazing multim
dia Dinosaur-**pedia,**
suitable for any
Amiga.(CD114x) £5

Adult MENsation
Hundreds of high qua
colour images of the
male body. Ohh La L
(CD164x) £5

Adult Sensation 2
4000 colour "girly" pic
tures, Adult samples,
Adult jokes and more
(CD115x) £7.99

Sci-Fi Sensations v
2 CD's full of Sci-fi p
animations, sounds
Rated over 90%
(CD118x) Only £7.9

Video Creator AGA
Create your own stu
ning music video in t
to your music cd's.
(CD439) Only £5

Movie Maker Vol:1
Learn the secrets of
movie trade with this
brilliant MM CD. 4mb
(CD184x) Only £5

Other Amiga CD

The Hidden Truth - (4mb AGA) £2
Aminet Set One - 4 CD set. £19.99
Aminet Set Two - 4 CD set. £19.99
Aminet Set Three - 4 CD set. £34.9
Aminet Set Four - 4 CD set. £34.99
Aminet 17 - Games, Tools. £12.99
Aminet 18 - Games, Tools. £12.99
Xi Paint 4 - 24bit graphics. £CALL
Aminet 20 - Games, Demos. £12.99
AGA Toolkit '97 - latest utilities. £9.9
Aminet 21 - Demos, Tools. £CALL
The Flash ROM - Emulators. £29.99
Into the NET - Internet software. £1
Women of the Web - £19.99
Geek Gadgets - Amiga toolkit. £19.9
17Bit 5th Dimension - £5.99
Nothing but Gifs AGA - £5.99
AGA Experience 2 - £9.99
APC/TCP Vol: One OR Two - £7.99
Utilities Experience - £2.99
Weird Science Clipart - £9.99
Weird Science Fonts - £9.99

Personal Suite 6.4
Includes Personal Paint6.4, Person
Write, SBase, Personal Fonts and
much more. *£19.99 (CD195x)*

Kara Fonts Collection
A very high quality compilation of a
mated fonts - brilliant for intros or V
Title Production. *£29.99 (CD259x)*

Personal Paint 7.1
The very latest and without a doub
best Amiga 24bit paint package.
£29.99 (CD406)

More Amiga CD-ROMS availa

I love my Amiga mate!
AMIG
Definitely BACK FOR THE FU
AMIGA
AMIGA MOUSE & M
£12.95 + £1p&p
OFFICIA
COMMODO
MOUSEMA
£3.99 in p
AMIGA XL TSH
£10.99 + £1p&p

SixthSense Investigations is an amazing new Amiga arcade adventure, featuring 32 locations, full character dialog, 3 different worlds, many interactive characters, puzzles and more. This game sets new standards for Amiga gaming. Look for reviews!

Order: CD430 UK : £29.99 - AUST : $60

SixthSense Investigations AGA

Here it is, what you've all been waiting for: A texture mapped 3D-racing game for the Amiga! Forget those boring "flat" 3D-racing games. Flyin' High allows you to drive over hills, through tunnels, over ski-jumps and a lot more. Up to 4 Players can play simultaneous by using a 4player Joystick-adapter.

A Construction Kit may follow shortly!

System-requirements:
Amiga, KS3, 68020, AGA-Chipset, 4MB Fastram, Harddisk. - Fun starts on 68030 running with 30MHz.

Order: CD440 UK : £29.99 - AUST : $60

Flyin' High 6mb AGA Amiga



AGA Experience 3 is the latest collection of AGA tools, demos, graphics, games etc. This release contains 100% new material and will make a great addition to any A1200/A4000 owners CD-ROM collection.

Order: CD432 UK : £12.99 - AUST : $26

AGA Experience 3 AGA Amiga

UFO Encounters contains thousands of documents and images that "no-one" wants you to see. The CD covers all aspects of Abductions and UFO Sightings. Suitable for use on any Amiga.

Order: CD179 UK : £14.99 - AUST : $30

UFO Encounters Any Amiga

Contains a wealth of software, *Including:* Workbench Games, Fonts, Textures, Clipart, Samples, Multimedia Backdrops, Music modules, Business Letters, Tetris Games, 3D Objects, Images, Backdrops, Tools and more.

Order: CD449 UK : £19.99 - AUST : $40

Software EXPLOSION! Any Amiga

p.OS has been developed on the AMIGA platform, its conception makes it the ideal computer for setting up a project like this. Furthermore, the AMIGA and its Amiga-OS make it possible to easily run both operating systems in multi-tasking. This is why the development of p.OS has been done with the usual tools on Amiga-OS-side. This is an important benefit for any p.OS developer as well as for the user, who is still able to use software that has not been further developed under Amiga-OS, while running innovative new applications with all those innovative features under p.OS. Thus, the entry or change to this operating system is done very smoothly.

Complete p.OS workbench - p.OS shell
p.OS-DOS - p.OS demonstrations

Order: CD496 UK: £19.99 - AUST : $40

p.OS pre-release NEW WB3 Required

Nathan Ludkin's MIDI GOLD is a professionally compiled collection of around 3000 MIDI files. Every MIDI track is categorised into various directories, like: Film, Composer/Artist, Style, etc. *Great with Yamaha XG System*

CD492 UK : £29.99 - AUST : $60

MIDI GOLD NEW Any Amiga

I love my Amiga mate!™

As the UK's best loved Amiga CD-ROM producer, We guarentee you won't be disapointed with our service, choice and backup. Request a copy of our 24 page CD-ROM catalogue now and we'll send you a free "I Love my Amiga, mate!™" sticker.

The Games Room is an original compilation of Gambling games. It covers everything from Fruit Machines to Card Games, including Klondike, Poker, Solataire, BlackJack, and Rummy, Roulette, Darts, Bingo, Pool, Checkers, Chess, Backgammon, Dominoes, Various Board Games like Monopoly and Cluedo, Mastermind, Pub Quiz's and a wealth of other Casino related games.

Order: CD451 UK : £12.99 - AUST : $26

The Games Room KS 2/3

Emulators Unlimited is a collection of the best software emulation tools available. The CD contains emulators for Apple Mac, PC, Spectrum, Commodore64, Amstrad, BBC and many more. Virtualy all the emulators are supplied ready to run and come complete with many games to run. Easy to use on any Amiga.

Order: CD117x UK : £14.99 - AUST : $30

EMULATORS UNLIMITED All Amiga's



The re-compiled C64 Games CD includes around **15,000 all-time classic Commodore 64 games.** It's very easy to use and the CD has a complete index of every game.

Order: CD182 UK : £29.99 - AUST : $60

C64 GAMES ARCHIVE KS2/3 2mb

Sound Effects Sensations Volume One includes all the tools and data you need to be able to produce either music or Sound FX sequences.

Includes over 15,500 samples.

Order: CD165x UK : £9.99 - AUST : $20

SOUND EFFECTS CD All Amiga's

The very latest 17BIT disks specially compiled by Quartz. All the best titles are here. Through an easy to use interface you have access to around 600 brand new Amiga disks all catagorised into various themes.

Order: CD495 UK : £14.99 - AUST : $30

17BIT LEVEL 6 NEW KS2/3

Kid's Games

Suitable for any Amiga^
Only £3.75 each (minimum of 2)

POSTMAN PAT
COUNT DUCKULA 1 or 2
BULLY'S SPORTING DARTS
HUCKLEBERRY HOUND
POPEYE 2
POSTMAN PAT 3
THOMAS THE TANK ENGINE
THOMAS' FUN WITH WORDS
SOOTY'S FUN WITH NUMBERS
other titles available...

ADULT SPECIAL!

Order Adult Sensation One, Two and Three for just £20
or order them singularly for only £7.99 each

Order CD497

SUPER CD OFFER KS3 - 4mb

All six CD's in one stonkingly good pack.. Normal Value - Over £60 Availble for a very limited time at just £30. *Great Xmas Present!!!*

Paranormal Encyclopedia
Emulators Unlimited
Epic Collection3
Speccy CD v1
Movie Maker
Insight Dinosaurs

OVER 200 AMIGA GAMES IN STOCK
CALL FOR A FREE FULL COLOUR CATALOGUE

Mouse Mat	£3.99
Standard Amiga Mouse	£11.99
Official Amiga Mouse	£12.99
Joysticks...	£call
10 capacity disk box	50p
10 Quality Blank DSDD disks	£4.95
Amiga User Manuals	£call
Amiga to PC Monitor adaptor	£10
Various Cables	£call
Disk labels	2p ea
3.5" A1200 Hard disk cable	£20

Consumables Any Amiga

3500 photos digitised for exceptional display. These professional quality stock photos are yours to use in any desktop application that supports JPEG files.

Order: CD480 UK : £9.99 - AUST : $20

3500 Presentation Pictures

Anime Babes "Special Edition" is an Adult CD containing **thousands of high quality japanese Manga type images**. *Some people may find this CD offensive. Contains images of sexual acts.*

Order: CD491 UK : £19.99 - AUST : $40

Anime BABES SE NEW Any

A high quality professional Texture CD containing over 1000 "seemless" texture files, great for 3D renderers or multimedia presentations etc.

Order: CD227 UK : £14.99 - AUST : $30

Weird Textures Any

Contains 500 commissioned high quality professional clipart images, all of which are royalty free. It's supplied with a 30+ page booklet showing all the images. Every Cartoon image on this CD is 100% original. A great value, high quality product.

Order: CD235 UK : £19.99 - AUST : $40

Mick Davis' CARTOONS Any Amiga

ENCYCLOPEDIA OF THE PARANORMAL AGA, 4-6mb

Order: CD423 UK : £19.99 - AUST : $40

The Epic Interactive Encyclopedia of the Paranormal is an exciting new multimedia Amiga based CD-ROM featuring high-res AGA graphics throughout. Covering subjects like: ***UFOs & Aliens, Strangelife (Bigfoot, Lochness monster etc), Mysticism, Mind over matter, Myths and Legends*** and more, this CD promises to give you an "experience". Also for the first time on an Amiga multimedia CD, there are true "AVI" files (Audio & Video). Hundreds of colour images, masses of AVI's, and animations, hundreds of voice-overs, over 40 minutes of presentations around 400 subject synopsis', and hundreds of 'cross-referenced' articles.

AS SEEN ON TV

Features Include

***Hundreds articles - *Updated interface - *Hundreds of film clips**
***Hundreds of images - *Sound clips - *True AVI feature**
***Over 400 Synopsis' - *Full Multimedia Presentaions**

FREE CD'S
With Every Purchase Over £25

SOFTWARE EXPLOSION! **- New Release -** ***Worth £20 Place an order now of £25 or more and receive this CD free!*** **Contains a wealth of software, Including: Workbench Games, Fonts,Textures, Clipart, Multimedia Backdrops, Samples, Music modules, Business Letters, Tetris Games, 3D Objects, 3D Backdrops, Images, Colour Clipart, Tools and more.**

Spend £50 and we'll send you another *Mystery* CD free.
Spend £75 and we'll send you another 2 CD's free! etc...

epic multimedia
GTI
AMIGA International
GRAPHIC DETAIL
SCHATZTRUHE
guildhall
ACID SOFTWARE
ALTERNATIVE SOFTWARE
TFC SOFTWARE
Quicksilver
Weird Science
ISLONA Games
CLOANTO

AMINET CD-ROMs KS2/3

Aminet Set One & Two
each set contains a 4 CD set with mb's of tools, images, modules, animations and more. **£19.99**

Aminet Set Three
A 4 CD set containing some of the latest tools, images, modules, animations and more. **£29.99**

Aminet Set Four
A 4 CD set containing some of the latest tools, images, modules, animations and more. **£29.99**

Aminet Set Five
The Latest 4 CD set containing the latest tools, images, modules, animations and more. **£34.99**

Now you can use any PC Trackball or Mouse on your Amiga!

NEW
Amiga
£39.99

PRIMAX Master Mouse

Mouse Master is a stylish Trackball that doubles up as a Mouse! Supplied with our Mouse-IT software and dongle, This allows any PC serial mouse, trackball or pad to be used on the Amiga. You can buy Mouse-IT seperatley for just £7.99 or get it free when you buy the PRIMAX Master Mouse.

XCOPY Pro^
XCopy Pro is the most advanced Amiga disk copier suite available. It includes numerous duplication modes from standard dos type copy to a deep nibble type copy. Every Amiga owner should have a copy!

UK : £12.99 - AUST : $26 *Available from the UK only*

Deluxe Paint 5^
All the power of Deluxe Paint 3 & 4 but far faster. Draw, Sketch or even animate in upto 256 colours. This software is the envy of ALL PC users. Includes full previously unpublished manuals.

UK : £19.99 - AUST : $40

Blitz Basic 2.1^
A next generation BASIC with features borrowed from PASCAL, C and others. Program any type of software with more power than ever before.

UK : £19.99 - AUST : $40

Mini Office Suite^
Recently re-released by Guildhall, this superb easy to use office suite is great for the home and small business, It includes a Word Processor with a spell checker, Database, Speadsheet and more.

UK : £19.99 - AUST : $40

FREE 24 PAGE COLOUR CATALOGUE AVAILABLE ON REQUEST.

PLEASE SEND ME...... AM

THE TOTAL VALUE OF THE GOODS ARE £________
PLUS POSTAGE OF £________
SO THE TOTAL OF MY ORDER IS £________
MY NAME AND DELIVERY ADDRESS IS...

TEL:____________ AMIGA MODEL__________
I WISH TO PAY BY....
CHEQUE ☐ POSTAL ORDER ☐ CREDIT CARD ☐
CARD NUMBER________________ EXP_____ ISS___

^ Supplied on Floppy disk

CD-ROM

Super CD-ROM 16

Draw Studio 2 Lite headlines this month's 100% full CUCD16. There's also some game demos from Islona and over 600Mb of other software. See bottom left for a breakdown.



Welcome to CUCD15. If you haven't invested in a CD drive yet, read this to see exactly what it is that you're missing.

CUCD15 can be booted from a CD32 or an A1200/4000 with CD32 emulation. In order to use this CD from your own Workbench, you only need to click on the InitCD icon, which will then allow software to run from the CD. It initiates MUI, IDer and the NewIcons systems – don't be surprised if the look of your Workbench suddenly decides to change. The whole thing is only temporary, and it can be removed by simply clicking on InitCD again.

To help you in finding your way around, there is a DOCS.GUIDE, which will connect you to nearly all text documents, and INDEX which is a CD search tool. Just like everything else on the CD, you need to click on them to activate them.

650 Mb of What?

It's easy to miss the where the real contents of a CUCD lies so here's a list of how much data lies in each directory.

CUCD16 is a well balanced CD, packed to the brim with 650MB of data. Draw Studio is fantastic as it is but it also comes with 100MB of support files to use with it. Great!

● Draw Studio	115MB
● IslonaGames	12MB
● CDsupport	70MB
● CDROM	21MB
● Demos	20MB
● Games	44MB
● Graphics	62MB
● Magazine	15MB
● Online	72MB
● Previews	72MB
● Programming	32MB
● Readers	9MB
● Sound	38MB
● Utilities	20MB
● WWW	42MB

Highlights

Draw Studio



The superb high quality and easy to use structured drawing package, Draw Studio 2 Lite, comes from the Dean brothers' stable responsible for the excellent Image Studio. Draw Studio 2 Lite is a fully functional Draw Studio missing only 24-bit support and some other functions over the Draw Studio 2 package. MUI is required but it is included on CUCD16 as always.

Islona Games



Three killer demos from the new games programming house Islona. Sixth Sense Investigations V2, Pinball Brain Damage and Skimmers. Nothing to do with those, the InfraRexx software to accompany the AIR Link DIY feature in this month's CU Amiga is also on the CD.

More on IDer

Reaction to IDer on CUCDs has been a mixed back of criticism and praise. Much of the problems have been caused by a lack of understanding of what IDer is for and failure to click on the essential InitCD icon. This month we have made some changes to the IDer launcher to work around the teething problems so that this system is more fool proof.

For those that missed it, most project icons on CUCDs now have IDer as the default tool. IDer allows YOU to choose exactly what viewers and players you wish to use for specific types of files. Graphics card users may display all pictures on current and future CUCDs with a hi resolution viewer, for example. Your preferences are saved to your hard drive. The CUCD preferences program can be found in the top left of the CDsupport drawer.

What's in your drawers?

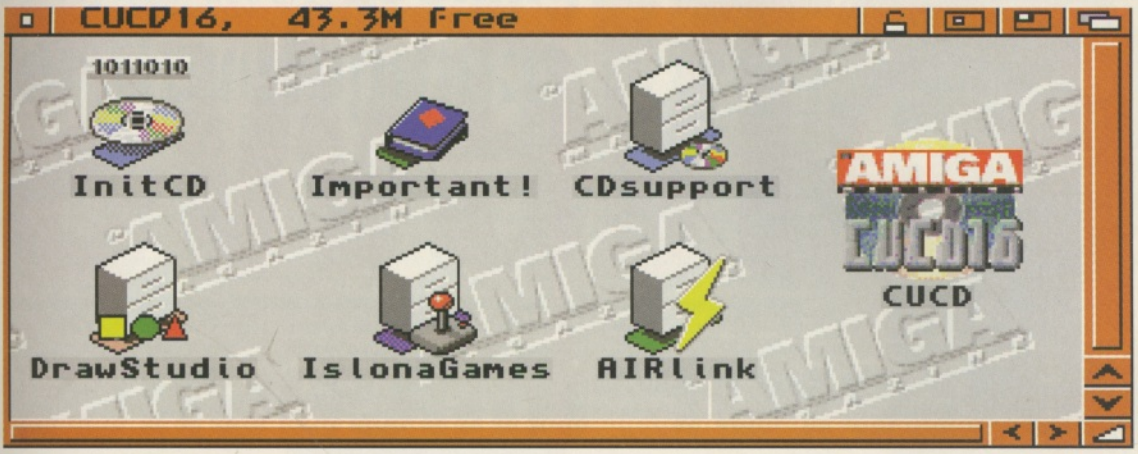

CUCD16:CUCD, 43.3M Free
CDROM
Demos
Games
Graphics
Magazine
Online
Previews
Programming
Readers
Sound
Utilities
WWW

Root: The CDsupport drawer can be found in the root of CUCD16. The standard Workbench drawers icons have vanished (though the drawers remain) to be replaced with the CDsupport drawer and an opening Readme file. Draw Studio, AIR Link, the IslonaGames demo drawer and the main CUCD icon can be found here.

Draw Studio: LH Publishings excellent structured drawing package, Draw Studio makes an appearance on CUCD16 in a fully functional 'Lite' version sporting most of the features bar 24-bit support. It's a superb application and it requires MUI, also included on the CD.

AIR Link: InfraRexx, the software support suite for AIR Link, can be found in this drawer along with a collection of available codesets for remote controls. See the AIR Link DIY feature starting on page 28.

Islona games: Three killer demos from the new games programming house Islona. Sixth Sense Investigations V2 demo, Pinball Brain Damage and Skimmers demos can be found here.

CD Support: The vital support files for the CD; viewers, players, IDer and the obligatory CUCDprefs program.

CUCD: This is where the vast majority of the CD hides. What wonders can be found within...

CD-ROM: The latest AmiCDFS, Aminet CD indexes, CD ID collection IDE-fix IDE CD-ROM software, MakeCD and QuickSampler.

Demos: AGA and ECS offerings to swirl your plasma and rotate your 3D world. Turn the lights low, crank your stereo and enjoy!

Game: Another great collection of games, some 16 playable shareware and demo games should keep your joystick busy.

Graphics: 3D Objects, IFF animations, pictures, the latest CybergraphX V3, Picasso 96 RTG systems and more graphics goodies besides.

Magazine: The C source code for the tutorial, database of issues, networking software, MCP and HiDensity, the Wired World network games and... MindGuard.

Online: The Thor news/mail package, Eucalyptus E-mail client, Miami 2.1g, Web creation helps and more superb comms related programs and resources.

Previews: ArtEffect 2 demo, Digital Almanac, MYST screenshots and a bumper Hidden Truth CD-ROM preview.

Programming: AMOS, Blitz, C and MUI programming resources. Documentation and development libraries for coding gurus of all kinds.

Readers: GmPlay GUI, Mods, and utilities sent in by our readers. Keep them coming and look out for a reader's special next month!

Sound: EaglePlayer 2, the latest MPEGA layer III audio player, modules and a bumper collection of samples for use with Soundtracker or any other music package of your choice.

Utilities: Lots of invaluable utilities ranging from AddressaAssist to ViNCEd with every letter inbetween.

WWW: The big three web browsers,.AWeb II 3.0, IBrowse 1.12 and Voyager-NG demos. The usual on-CD Amiga web sites and CU Online!

Disk doesn't load?

If your CD does not load contact DiskXpress on 01451 810788. If they advise that the CD is faulty send it along with a SAE to: CU Amiga Magazine Disk Returns, DiskXpress, 7 Willow Court, Bourton Industrial Park, Bourton on the water, Gloucestershire GL54 2HQ.

Please note that some CDs will not autoboot on systems other than CD32s, so try loading it from Workbench first. CUCDs will work with almost all Amiga configurations and filesystems. However, we recommend older CD filesystems be replaced where possible. A non-working program is *not* an indication of a faulty CD!

DESTINATION MARS



News

PowerUP unleashed

A1200 PPC gets Graphics Card!

After months of waiting, the PowerUp PowerPC cards from phase 5 are finally available. The Cyberstorm PPC200 board for the A4000, featuring a 200MHz 604e PowerPC processor and a 50MHz 68060 is now shipping to customers. Gordon Harwoods, Weird Science and Blittersoft in the UK should all be able to provide them.

A surprise announcement which should make A1200 owners very happy indeed is that the A1200 cards have been significantly improved. Due to debut at the Cologne fair on the 14-16th of November, the specifications of the Blizzard 603e+ boards have been upped to include two SIMM sockets and most importantly a direct DMA slot which will take a version of the CybervisionPPC card called the BlizzardVisionPPC. The Blizzard 603e+ Power Board will use a 68040 25,33 or 40MHz or a 68060 at 50 MHz as a companion CPU. It will take PowerPC 603e CPUs running at 160, 200 and now 250MHz. There will be a Fast SCSI-2 implementation on board and two SIMM sockets. The Blizzard 603e Power Board, due at Christmas, will have all the same features as the 603e+ but uses 68030 chips as the companion CPU.

The latest benchmark tests of real world applications are showing some truly excellent performances from the PowerUp cards, with 603e/150s clocking between two and three times the speed of current '060/50 accelerators and the 604/200 outperforming the old king of the chips by between five and 15 times as fast. See the table for some examples of the latest figures. Note that the 68060 figures quoted are based on the performance of the CyberstormPPC's companion processor, which runs about 8% faster than the older Cyberstorm '060 boards.

The BlizzardVisonPPC graphics card, which will allow A1200 users the benefits of a graphics card without having to go for Zorro, is similar in specification to the previously announced CybervisionPPC graphics card. They are based on the Permedia 2 graphics chip from 3Dlabs. This powerful chip combines 3D graphics capability comparable to the top of the line 3DFx chipset with an excellent 2D performance. Features of the chip include:

- 1280x1024 pixels in 24 bit colour @85Hz
- 16-bit Z-buffer
- 4Mb SGRAM
- 230 MHz RAMDAC.
- 1 million texture mapped polygons/sec
- 83 million pixels/sec (textured, bilinear filtered, perspective)
- Hardware Gouraud shading, anti aliasing, stencil buffers and per pixel fogging

phase 5 are hoping to have the BlizzardVisionPPC card ready for launch at the same time as the BlizzardPPC cards, Prices (without 680x0 processor where relevant):

CyberstormPPC 200 MHZ	1795DM,	£669
CyberstormPPC 150 MHZ	1295DM,	£499
Blizzard603e+ 160Mhz	749DM	£tba
Blizzard603e+ 250Mhz	1199DM	£tba
BvisionPPC	499DM	£tba
CybervisionPPC	549DM	£219

Contact phase 5 on +49(0)6171 583787 or phone your local phase 5 distributor for further details.



LIGHT MY FIRE.

POWERUP®
AMIGA™ GOES POWER PC™

Test:	68060/50	603e/150	604e/200
Mandelbrot "dragon"	8.02s	n/a	0.79s
Mandelbrot "eye"	40.10s	n/a	3.55s
Mandelbrot "waves"	350.54s	n/a	15.87s
Mandelbrot "sun2"	940.32s	n/a	39.65s
LWshow small, refmap	240.11s	145.48s	45.49s
LWshow small, no refmap	314.23s	119.38s	34.97s
LWShow medium. refmap	281.67s	162.71	55.30s
LWShow large, no refmap	408.00s	170.32s	66.17s

Amiga Inc. Looking for Development

Things are beginning to looking very good indeed on the Amiga front. Amiga Inc's hiring is progressing apace with announcements shortly to be made on some big name signings. With the software OS update 3.5 a high priority, Amiga Inc with the co-operation of ICOA, the Independant Council of Open Amiga, are setting up a database of third party software and hardware manufacturers.

Developers are being asked to register their details over the Internet, initially via the CU Amiga website at www.cu-amiga.co.uk, and later at the ICOA website when it is fully set up. The idea is to give them the opportunity to bring together the world's most knowledgable developers in various fields to co-operate on the decision making processes which will lead to finalising the future direction of the Amiga. Amiga Inc hope to organise developers into working groups, and will be running developer's conferences at all the major Amiga related shows in the near future, starting with the Cologne show in early November. The developer's conference program will be chaired by Nova Design's Kermitt Woodall, and is intended to give an open forum for the Amiga community to let Gateway and Amiga Inc know what they want from the platform. Amiga Inc's Darreck Lisle assured us that this is just the start of the promised openness of the new owners of the Amiga, commenting that "We will not be another Commodore".

▲ **Epson have struck a deal to offer developer support to Amiga Inc.**

OS3.5 Details: RTG but no MUI

In a step which marks the first in a number of moves to bring third party support for the Amiga back in line with other platforms, Amiga International have signed up as part of the official Epson development programme. They will recieve documentation, source code and technical support to ensure that in the future all Epson products such as printers, scanners and so on will be fully supported by the Amiga's new operating system.

Details of OS3.5 are sketchy at the moment, but we can tell you that it will be based on the Kickstart 3.1 ROM chips, being a software solution. It is expected within the next six months, with a full OS4 including ROM development to follow about a year from now.

Support for retargettable graphics and audio will be included. Java support has been spoken of as something they would like to see, but realistically the amount of work involved means this is unlikely to happen until OS4. A TCP stack will be implemented, and Universal Serial Bus (USB) suppport is being looked in to.

Magic User Interface, hailed by many as an essential addition, looks likely to be left on the sidelines.

World Foundry founded

The revival of the Amiga as a games platform continues with the announcement of another new software house. Digital Anarchy Studios and Deimos Design have joined forces to become the World Foundry, a name based on their concept for shared world games.

The first two games from the new World Foundry stable will be the ultra complex space trading / war game Explorer 2260 and Maim and Mangle, a Gommand and Conquer style real-time strategy game. The three founders of World Foundry, Chris Page, George Hornmoen and Ed Collins, have promised PPC support as a priority, and hope to release PPC versions before 68k versions of their titles.

Promising a richly detailed background universe with complex societies and real world extrapolations of technological assumptions to go with involving gameplay and state of the art graphical effects, World Foundry have put their aim of producing what they hope will be the pinnacle of computer gaming above immediate financial reward. CU Amiga wishes them the best of luck with their venture.



News in Brief

Weird Science Drop Prices

Weird Science have significantly cut the prices of a number of key products. Giga Graphics, a four CD graphics set drops to £9.99, Meeting Pearls 4 drops to £4.99 and System Booster drops to £9.99. There are various other price cuts, but the most significant is the drop in price of Aminet discs to £10.99 for the singles and £27.99 for the Sets. Sets 1, 2 and 3 drop even further to a bargain £15.99. Contact Weird Science for more details on +44 (0)116 246 38000

Sadeness Get Distributed

Sadeness software have announced a distribution deal with Grenville Trading International in Germany in partnership with Weird Science in the U.K. Their upcoming games Foundation and OnEscapee, due for release over the next few months, will be available to retailers worldwide from this distribution partnership. Sadeness Software can be reached on +44 (0)1263 722169

Epic Moves

Epic Marketing, one of the major suppliers of Amiga CD-ROMs and parent company of Islona games are moving premises for the second time in a year due to lack of stock space. Their new address is:
Epic Marketing, Unit 22, Area 50,
Cheney Manor Ind. Est, Swindon,
Wilts SN2 2PJ

According to Epic, they attempted to move into Area 51 next door, but were repulsed by men in black. Ahem. Epic's phone number stays the same on +44 (0)1793 514188.

Where Champ Man2?

Apologies to anyone who was expecting a review of Championship Manager 2 this month. Yes, it has been delayed again, but not for long, and this time it is our fault, not Eidos'. We had the game in for review some weeks back but asked them to make some changes to it as we felt it was almost but not quite up to scratch. We could have reviewed it and panned it, but that wouldn't have helped anyone. The product is now finished, including several important modifications. Get the full story, and a full review, next month.

Civilization CD in Shops Now

A number of readers, prompted by the news item about Civ CD version in the September issue of CU Amiga Magazine, have informed us that they have had difficulties obtaining this title from branches of Electronics Boutique, and have been told that the title did not exist and would not be stocked. According to publishers Guildhall Leisure this was because of a minor communication problem which has now been resolved. The Civ CD is now in branches of EB around the country, and their buying department is keeping a close eye on sales to guage the demand for Amiga CD releases in respect to stocking future titles. Sales of Civ CD could be a make or break landmark for future Amiga CD-ROM games through high street chains. Fortunately it's the kind of game that's got quite wide ranging appeal across the Amiga gaming community and so with any luck it might prove a point or two. to the chainstores. However EB are waiting to see Amiga users vote with their chequebooks for the future of Amiga CD titles in the highstreets.


'We note that your primitive civilization has not even discovered Pottery. Do you care to exchange knowledge with us?'

- 'No, we do not need Pottery.'
- 'OK, let's exchange knowledge.'



Fusion Still Running Hot

Microcode Solutions have announced the release of Fusion 2.0, which promises features to surpass the famous shareware ShapeShifter. Fusion, successor to the Emplant Macintosh emulator, will be capable of running the latest MacOS 8, which is currently incompatible with ShapeShifter due to design limitations of the emulator. Along with providing several bug fixes and implementing features many thought should have been obvious from the start (like support for *all* SCSI controllers, not just the old Emplant hardware), Fusion has improved its MMU support. Details for registered Fusion users will be available through Blittersoft (tel: 01906 261466).



US Amiga '98

The organizers of the US Amiga '97 show held in March have commited to a further show next year following a short visit from Darreck Lisle, who at the time was Amiga, Inc's sole PR contact.

Lisle is the company's "slash", he is currently acting as their PR contact / event coordinator / developer contact / feelgood ambassador until more staff are hired. In three of those capacities, he paid a visit – or more accurately, allowed himself to be paid a visit in the St. Louis airport in between flights back to Amiga Inc's home in South Dakota. Lisle's visit and show of support convinced Amiga '97's organizers to go for two in a row.

Most of what Lisle said falls squarely into the "wait and see" category – in this case, until the Midwest Amiga Expo in the US and the Cologne Computer '97, both in November, but the hits were enough to persuade the organisers of this show that next year would be better than ever.

News in Brief

Cheap Crystals

Crystal Software and Electronics in the Netherlands have announced the release of two budget titles, Trainer Maker, and the previously licenseware title Lost on Parrot Island. Trainer Maker will retail for 9.95 guilders and Lost on Parrot Island for 19.95. Crystal Software are able to sell these products directly, but are looking for UK distribution. Any interested parties should contact them on +31 (0)592 373634.

PageStream 3.3 Announced

Soft-Logik have announced their continuing support for the Amiga with the release of PageStream 3.3. Sold as an upgrade for users of older versions of the already feature-laden DTP package, it will cost $50 for owners of 3.2 and $85 for users of 3.0 and 3.1. New features include fly out tools, font substitution, HTML help guide, improved Adobe Illustrator compatability, RTF export and more other features than we could fit on this page. Rumours indicate that Soft-Logik will also shortly be announcing version 7 of their word processor package WordWorth. For more details call Soft-Logik on +1 314 305 7874

Distant Suns Overhead

The venerable Distant Suns astronomical program has its third distributor in as many years. Power Solutions of Alberta, Canada has acquired the rights to the program after its previous owner, Chaocity (of Vista Pro and Vista Lite fame), closed shop. Distant Suns is an extensive and detailed planetarium simulator, with an extensive and extendable catalog of stars and celestial objects. The Distant Suns package never seemed to get much of a foothold in the European Amiga market, so now could be the time to get your hands on a copy.

Chaocity faced a hotly competitive Amiga software market, particularly with the release of The Digital Universe from Syzygy of Canada. To address this, Power Solutions has announced a deep discount on Distant Suns: $27.75 Canadian retail, or less than £15 Sterling. Power Solutions are welcoming user and dealer inquiries. Contact them at +204-453-0527. www.powersolutions.mb.ca.

Stateside News

by Jason Compton: **Jason Compton is Editor in Chief of Amiga Report Magazine**

Back in the US of A

It's no secret that a lot of American Amiga users were upset when the Amiga went to Germany with Escom. It meant the end of an era. Sure, the Amiga had always been more popular in the UK and Germany, but by having the "official capital" in the US, American users still felt they had an edge over their international counterparts – and of course it was true for a time, particularly in hardware development, that American companies lead the field. Users over here got a big shock when the change was made. Even before, when the market was not huge, physical proximity to all of the Commodore action meant that we had a pretty good retail structure for Amiga sales. But when the Amiga moved to Germany, the UK got an office of Amiga Technologies. Being a smaller market, all the US got was a distributor who had once been a warranty service company. This was not a good move. North America was pretty officially relegated to second-class status, and that stung.

Now the capital has officially moved back to the US, and now it's the other side of the coin. Now more eyes are turning to us and our market is under closer scrutiny. It's an interesting sight, to say the least, having made some major changes in recent years. That hardware dominance has faded greatly – there are scant few companies still aggressively researching products, owing to the German hardware dominance (and certainly in part due to the weak DM). No American company produces an A1200 '040 or '060 card, for example. Only one builds an A2000 '060 card, and another builds an A4000 '060 card. Both target their products at video and graphics professionals, not at overall power users – although these have certainly found out about the products.

NewTek U-turn?

The video and graphics market is the great paradox in America. NewTek holds an almost god-like significance for so many users, and yet relatively few of them own any NewTek products. After all, there are only so many Video Toasters out there, even if they are cheap on the used market these days. But when NewTek makes noises about cutting all Amiga support (as they have done every week for the past four years), someone's bound to try to start a panic. Similarly when news comes in that hints they may be returning to the Amiga, everyone gets over excited. The news that Amiga Inc will be exhibiting at the NewTek Expo and the rumours that NewTek have asked phase 5 for a PowerPC board have distracted attention from a lot of companies who are definately sticking with the Amiga. Markets are always about more than one company. After all, the Amiga market has survived through the failure of two parent companies! Sometimes I think my fellow Americans need to look a bit further than one company, no matter how big their contribution has been. People were similarly upset about GVP's disappearance from the Amiga market. And what happened? GVP came back – now it's run by a German.

Net Spam has shut down

The most infamous organisation on the Net must surely be Cyber Promotions and accordingly the most infamous person would be the president, Sanford Wallance.

Cyber Promotions is responsible for sending millions of unsolicited E-mails out across the world, naturally enough advertising products and other schemes. This practice makes them highly unpopular on the Internet with end users and larger Internet providers alike. Cyber Promotion obtains E-mail addresses from web sites and Newsgroup lists. CU Amiga has been at the receiving end of unsolicited E-mail from this company also.

As we went to press, a US judge was expected to rule shortly on whether Cyber Promotions' Internet Service Provider, AGIS, must reconnect their server as demanded in a lawsuit filed by the mass E-mailer.

AGIS have been unclear to the exact reason for shutting down of Cyber Promotion's service but it is known that the provider faced significant criticism from other Internet providers who peer with the network. Cyber Promotions has also regularly been subject to a 'ping flood' attack by vengeful individuals which degrades the AGIS network performance in addition to making life difficult for the mass E-mailer.

Whatever the reason, it is not the first time that Cyber Promotions has been tossed offline. In fact, the company's history is rich with tales of having being dumped by one Net provider after another.

ISPs have come under intense heat when hosting 'spammers' as this type of activity is known. When Sanford Wallace signed a contract with AGIS, he thought he had found a sure home. If nothing else, this affair indicates that there is no safe home for unsolicited mass E-mailers which can only be a good thing for us all.



Sanford Wallace

Advertisers Index

Active Software	**56,57**	**01325 35260**
Analogic	**60**	**0181 546 9575**
Care	**57**	**01923 894064**
Classified	**92-93**	**0171 972 6700**
Dart	**27**	**0116 247 0059**
Enterprise Plc	**55**	**01624 677666**
Epic Marketing	**12-13,48**	**0179 3490988**
Eyetech	**53**	**01642 713 185**
First Computer Centre	**78**	**0113 231 9444**
Gasteiner	**74**	**0181 345 6000**
Golden Image	**95**	**0181 900 9291**
Harwoods	**22-23,68-69**	**01773 490988**
HiSoft	**106- IBC**	**01525 718 181**
L H Publishing	**OBC**	**01908 370230**
Owl Associates	**57**	**01543 250377**
PD Power	**98**	**0374 150972**
Sadeness	**34,36**	**01263 722169**
Selectafont	**36**	**01702 202835**
Siren Software	**7**	**0161 796 5279**
Special Reserve	**27**	**01279 600770**
Weird Science	**IFC-3**	**0116 246 3800**
White Knight Technology	**87**	**01920 822321**
Wizard Developments	**26**	**0181 303 1800**

With games like Duke Nuke 'em 3D Atomic Edition (centre pic) to choose from, it's well worth getting yourself a Mac emulator and swallowing your pride...

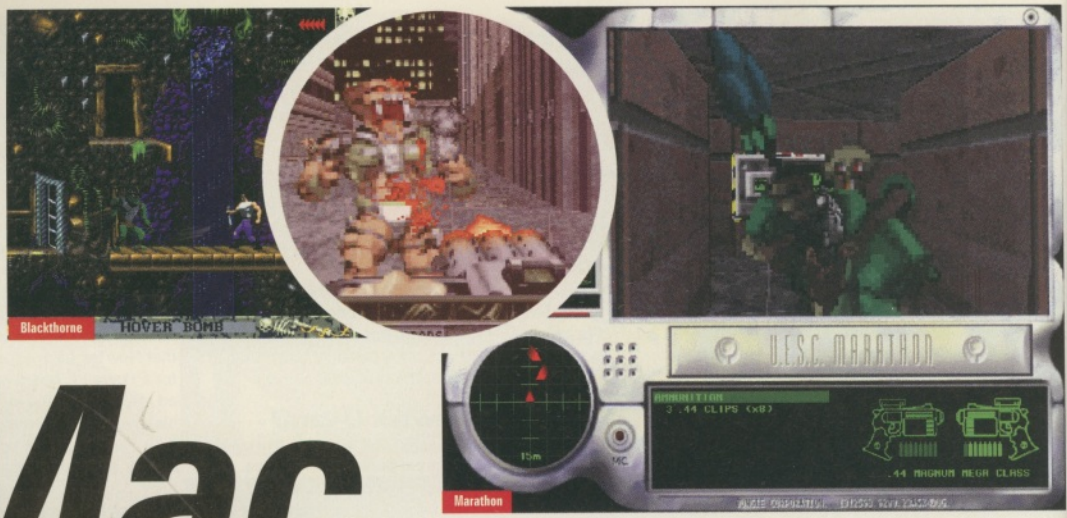

Mac to the future

Why limit yourself to playing only games that were specifically developed for the Amiga, when you could play all of these and more? All you need is a decent Miggy and a Mac emulator...

Curiously enough the past few months have seen a marked upturn in the amount of new Amiga games in development, but if you're still finding it hard to seek out new gaming distractions for your Amiga, you could do worse than cast an eye over the Mac arena. No, we're not talking about ditching your faithful Amiga in favour of a Mac. You can tap into the resource of Mac games using nothing but your Amiga.

The key to it is getting your Amiga kitted out with a good Mac emulator, such as ShapeShifter or Fusion. Prior to the PowerMac generation, all Apple Macs used the same Motorola 680x0 processors as the Amiga range. As a result, it's a relatively simple job to emulate the basics of a Mac on an Amiga. Because the emulation process is a lot simpler and more direct than emulation of the PC, there's not so much performance loss. While for most applications, emulating a PC on an Amiga is impractical, Mac emulation is a realistic and attractive proposition.

What you'll need

You're going to need a Mac emulator of course, and in order for that to work you'll require the appropriate support ROM and operating system. Your Amiga must be suitably expanded to handle the task. There are some general rules you should keep in mind for speccing out your Amiga to prepare for Mac emulation.

Both of the emulators require a minimum of a 68020 and at least 8Mb of fast RAM in a single continuous block. A 68030 can be considered a recommended minimum to run most Mac software created in the last five years. An MMU (Memory Management Unit) is highly recommended. MMUs come built in to 'full' (non-EC or LC) 68030s and 040s, and all 060s. Most if not all models of A1200 040 and 060 accelerators on the market for A1200s and big-box Amigas alike fit this category. Check your accelerator's documentation if you're not sure whether you have one. A hard drive is also required.

System 7.0.1 is the minimum operating system you can run on either emulator, and conveniently enough, Apple has made it free. It's a good idea to upgrade to 7.5 or 7.6. if you can. However, the new MacOS 8 is slow, eats up RAM and is incompatible at

Great expectations

Based on your Amiga, realistically what can you expect to be able to play? Here's a quick and very rough guide...

System	Game types
A1200, 10Mb RAM, 68020 CPU	**Strategy, adventure and early 80s coin-op styles**
A1200, 10Mb RAM, 50MHz 68030	**2D shoot 'em ups and basic 3D games**
Big box/tower Amiga, 18Mb RAM+, 68060, graphics card	**Most current games, including new 3D styles**

Alone in the Dark Trilogy

◀ **Fusing 3D characters and static pre-drawn 3D backgrounds, Alone in the Dark plays well on a relatively low specced Amiga under Mac emulation.**

Solarian

Brain Dead 13

A10 Attack!

the very least with Shapeshifter. Stay away from it for the time being.

Unless you're planning to draw solely from online sources of Apple software (such as Info-Mac, the Mac community's poor but serviceable attempt at Aminet), you'll need some way of loading Mac software onto your Amiga. Mac double density disks cannot be read by standard Amiga 880K floppy drives. You have a few options.

1. Get a high density floppy drive. Apple got sensible and decided to make their high density floppies with a more reasonable format, so you can read these on an Amiga high density drive.

2. Get a CD-ROM drive. Most Mac software now comes on CD.

3. If you have access to a real Mac, investigate your removable media options (Zip disks and so on).

A CD-ROM drive is definitely recommended. You can get by without a floppy drive although it's certainly convenient if you plan to do something like install the OS.

Setting it up

Turning your Amiga into a Mac requires a bit more than simply starting the emulator and loading some Mac software. The biggest job is to give the Mac emulator its own hard drive partition. There are three main ways to do this: re-format and partition your main Amiga hard drive, create a 'filedisk' on your hard drive, or format and partition an additional hard drive and add that to your system. The filedisk option is recommended for most situations, but now let's take a quick look at what's involved and the benefits of each solution.

Re-partition the drive

Unfortunately you can't just format part of your hard drive as a new Mac partition.

If you want a Mac partition and you have just one hard drive, the only way to do it is to re-format and partition the entire drive using HDToolBox or a similar tool. This will of course erase all data that was previously on the drive, so you'll need a way of backing up your data. You should have Quarterback 6.1 from our July 1997 cover disks.

This will back up your drive to a mountain of floppy disks or a more sensible medium such as Zip disks.

Create a filedisk

This is the easiest way to do it. An enormous file is created on the hard drive that acts like a virtual drive partition. The work involved in reading and writing to the filedisk makes it slower to use than a standard hard drive partition. However, this method means you don't need to re-format your drive, and if you decide you've had enough of Mac emulation,

CPU requirements

When shopping for Mac games you need to keep your eyes open for two things: the processor and RAM requirements. The good thing about Mac emulators on the Amiga is that you can generally translate your processor speed directly to the Mac equivalent, so your 030/50 Amiga is about as fast as a Mac with an 030/50 in terms of CPU power. This doesn't necessarily mean that a game will run just as fast on your Amiga as the equivalent CPU-equipped Mac due to the Amiga's slow graphics bus (see the Graphics considerations box). There are also games that have been compiled to be PowerMac only, meaning that they require a Mac with a PowerPC processor. While Microcode Solutions has promised to make Fusion be PowerUP compatible on the Amiga, so far that's still in development, so stick with software compiled for 680x0 compatible Macs.

There was never any such thing as an 060 Macintosh, so if you're emulating a Mac with an 060 card, congratulations: your Amiga has joined the elite ranks of Macintoshes with 680x0 processors faster than Apple ever built!

NEW...

POWER UP

AMIGA™ GOES POWERPC™

POWER UP YOUR AMIGA...

*A further dimension is being added to Amigas with our new PowerPC based **BLIZZARD POWER BOARDS** for A1200, A1200 based Tower Systems and A1500/2000 systems along with the new **CYBERSTORM PPC** for A3000/4000 systems. You'll now be able to benefit from performance many times beyond the speed of the fastest 680x0 based boards.*

Designed as upgrades for existing systems, **Power Boards** incorporate innovative dual processor technology where a fast PowerPC RISC processor is combined with a 68k CPU, dynamically sharing memory and system busses.

While the original AmigaOS 3.x continues to run on the 68K CPU, supporting existing applications to provide backward compatibility, the PowerPC CPU is backed by comprehensive PPC Libraries which provide the functionality to integrate PowerPC into an Amiga multitasking environment.

Software developers can easily optimise their programs, step by step, porting single tasks to PowerPC code, which then run in parallel with 68k tasks. Leading Amiga software vendors are preparing ported or optimised versions of their software packages already. It is anticipated that a large quantity of software products supporting the PowerPC will be available soon.

Power Boards will be delivered with a comprehensive suite of utilities, including the PPC library, as well as tools for creative users. Among them is a Public Domain GNU C compiler for PowerPC (including sourcecode), many demo programs and utilities with sourcecode. In addition to this software, free developer support is available via FTP site.

Last but not least, a PowerPC optimised version of CyberGraphX V3 with RISC optimised CyberGL/3D plus MPEG functions and libraries is included (along with a special GGX driver to support the AGA chipset) with full and comprehensive documentation.

	Blizzard 603e PowerBoard	Blizzard 603e+ PowerBoard	Blizzard 2604 PowerBoard	Cyberstorm PPC
PowerPC CPU Clock Speed	603e 175MHz	603e 200MHz	604e 150-200MHz	604e 150-200MHz
Companion CPU	68030 50MHz	68040/68060 25-50MHz	68040/68060 25-50MHz	68040/68060 25-50MHz
Est. PPC Performance MIPS SpecFP95	@ 175MHz Approx. 250* Approx. 3.1	@ 200MHz Approx. 280* Approx. 3.5	@ 200MHz Approx. 350* Approx. 7.1	@ 200MHz Approx. 350* Approx. 7.1
Memory Option SIMM Sockets	Max. 64Mb 1	Max. 64Mb 1	Max. 128Mb 4	Max. 128Mb 4
SCSI On Board	Fast SCSI-II	Fast SCSI-II	Ultra Wide	Ultra Wide
Amiga Compatibility	A1200(+T)	A1200(+T)	A1500/2000	A3000/4000(+T)
Est. Availability	Summer '97	Summer '97	Summer '97	Summer '97

Blizzard 603e Power Board - A1200(+T)

The new Blizzard 603e Power Board is an inexpensive Power Up Accelerator for A1200 system owners who already have a board with a socketed full 50MHz 68030+MMU processor (these CPUs have a gold finish to the top surface) eg.50MHz Blizzard 1230-II, III, IV or similar. Featuring a 175MHz PowerPC 603e RISC CPU, the board has a socket for the 50MHz 68030, expansion capabilities of up to 64Mb high speed memory and built in SCSI-II controller.

Imagine the performance from your A1200 with this low cost board!

Blizzard 603e+ Power Board - A1200(+T)

The Blizzard 603e+ Power Board is the highest spec Power Up Accelerator for A1200 systems. Featuring a 200MHz PowerPC 603e RISC CPU, the board has a socket for a companion 68040 or 68060 CPU, expansion capabilities up to 64Mb of high speed memory and built in SCSI-II controller. This board is ideally suited to those owners who already use an accelerator with either a 68040 or 68060 CPU (ie. Blizzard 1240T/ERC or Blizzard 1260 owners or their equivalents)

If you want the BEST from YOUR Amiga A1200 - this is it!

Blizzard 2604 Power Board - A1500/2000

If you own either an A1500 or A2000 you can now take advantage of PowerPC technology with this 604e CPU RISC based board which has a socket for a companion 68040 or 68060 CPU, expansion capabilities up to 128Mb of high speed 64-Bit memory, built in Ultra-Wide SCSI controller and a high performance expansion slot for expansions such as the CyberVision PPC. This board is ideal for owners of accelerators with 68040 or 68060 processors such as the Blizzard 2040 or Blizzard 2060 owners (or their equivalents).

Want the BEST from YOUR Amiga A1500/2000? - Look no further!

CyberStorm PPC Board - A3000/4000(+T)

CyberStorm PPC is the ultimate accelerator for Amiga 3000[T], 4000[T] and systems with compatible CPU slots, offer blistering 604e performance - more than 10 times faster than any 68k based accelerator on sale today! Available with clock speeds of 150, 180 and 200MHz, the companion socket for the 68k processor accepts either a 68040 or 68060 CPU. The board provides 64-bit wide extremely fast memory expansion using pairs of standard SIMMs, dynamically shared by the two CPUs. Additionally, CyberStorm PPC comes with a DMA driven Wide ULTRA SCSI controller on board offering transfer rates of up to 40Mb/sec for even the most demanding of professional applications. A 32Bit high speed expansion connector, with DMA access to the main memory, is also provided for later upgradeability.

The 200MHz version of the CyberStorm PPC provides performance of more than 350 MIPS or approximately 8.1 SPECint95 and 7.1 SPECfp95*... breathtaking speed that goes far beyond that offered by most PC systems. In the second half of the year, an advanced graphics board will become available for the CyberStorm PPC expansion slot, providing a subset of the innovative CAIPIRINHA custom chip. By having a stand alone version of the DLRP (Display List Risc Processor), this board will offer superior display capabilities through higher VRAM-based resolutions, pixel depths and speeds, as well as the potential to begin developing software supporting the functionality of the forthcoming A\BOX system.

PRICING AND AVAILABILITY:

Options with or without 68k CPUs will allow users to fit the CPU from their existing accelerator. Delivery of Power Boards is scheduled for Summer 1997 following finalisation of CE approvals. Call now for full details.

Special prices available to existing BLIZZARD & CYBERSTORM board users

Blizzard 603e/603e+ Board...	175MHz	200MHz
with Empty 030 Socket	£289.95	
with Empty 040/060 Socket		£379.95
with 68030/50MHz fitted	£329.95	
with 68040/25MHz fitted		£429.95
with 68040/40MHz fitted		£459.95
with 68060/50MHz fitted		£614.95

POWER PC TECHNOLOGY, POWER PC SPEED and POWER PC PERFORMANCE

Cyberstorm PPC 604e Board...	150MHz	180MHz	200MHz
with No Processor	£479.95	£549.95	£629.95
with 68040/25MHz fitted	£519.95	£579.95	£669.95
with 68040/40MHz fitted	£549.95	£609.95	£699.95
with 68060/50MHz fitted	£709.95	£769.95	£859.95

*Quoted performance figures are estimations based on specifications from Motorola/IBM and are relevant to the PowerPC processor only.
Prices include VAT @ 17.5%.
Owners of other makes of board or those who don't already have an appropriate CPU - please call for prices.

Harwoods... always the Fastest Amiga Boards and NOW PowerPC Technology for Amigas too!

CHECK OUT... NEW LOWER PRICES ACROSS THE RANGE OF BLIZZARD AND CYBER PRODUCTS!

STILL THE FASTEST, NOW LOWER PRICED, NO ONE ELSE COMES CLOSE!

CYBERVISION 64/3D

64-Bit ENGINE A2000/3000/4000 (T Series) 3D VERSION 24-Bit COLOUR ACCELERATED GRAPHICS CARD.

For all Zorro-3 and Tower System A1200s with Zorro II backplanes.

LOWER PRICES!

The core of this great board is the VIRGE GRAPHICS CHIP from S3. With 3D capabilities, it's able to process complex 3D functions in hardware (eg. shaded & textured surfaces) with Trilinear Filtering and Shading/Fogging for super realistic Real Time 3D Rendering. When used with CyberGraphX 3D library, Cybervision 64/3D can even offer a broad range of 3D facilities for any software developer.

CyberVISION 64/3D... 4Mb Version £139.95

MPEG Decoder - added to the Feature Connector to provide real time MPEG audio and video decoding at full size custom screens or, in Workbench windows (HQ display using 16/24Bit modes from CyberGraphX Workbench). Stereo audio output is provided via the supplied dedicated line output jack. Upgrade to a Cybervision 64/3D and MPEG bundle (from previous Cybervision 64) for a special low price! £149.95

Monitor Switcher - with integrated scan line doubler. Designed to fit into the Amiga slot, this gives full automatic switchover from the standard Amiga signal to Cybervision 64/3D's output. Both cards may be fitted inside A3000/4000 models leaving three Zorro-III slots free. £69.95

CYBERSTORM II

CAN BE EXPANDED TO A FULL 68060

AMIGA 68040ERC AND 68060 ACCELERATORS

You can choose between the 68040/40ERC Cyberstorm II or the ultra powerful 68060 version. When you fit a Cyberstorm II 68060 Accelerator to YOUR A3000, A3000T, A4000 or A4000T you can for example, render a graphic with Imagine 2.0 software in just 2.4 minutes! Compare that with 10.34 minutes on a standard A4000 '040/25! With no jumpers, both Cyberstorm II models are fully plug and play and, A4000 users even have the option of a SCSI-2 Module if they wish (A3000s already have SCSI built in).

- Up to 128Mb of standard SIMMs can be installed and you can even transfer the 72Pin SIMMs from your Amiga A4000 straight onto your new Cyberstorm.
- Optional SCSI-2 Module
- If your budget currently only covers the cost of Cyberstorm II 68040ERC, you can always upgrade later to the full 68060 processor for the extra power!

LOWER PRICES!

Cyberstorm II 68040/40 40MHz 68040ERC - 0Mb, Expandable to 128Mb	£239.95
Cyberstorm II 68060/50 50MHz 68060 - 0Mb, Expandable to 128Mb	£389.95
Cyberstorm II SCSI-2 Module	£69.95
Cyberstorm II SIMM RAM Expansions (Please call for a range of SIMM prices)	£Call

1240T/ERC TURBO ACCELERATOR MEMORY BOARD

A1200T* TURBO ACCELERATOR and MMU/FPU for *TOWER SYSTEMS

40MHz 68040 - 0Mb Standard, expandable to 128/256Mb

30MIPS with 60 Nanosecond SIMM fitted.

CAN BE EXPANDED TO A FULL 68060

A super LOW COST A1200 Turbo Accelerator Board, ideal for housing on any *Tower System A1200 main board (mechanical dimensions, high power consumption and heat emission require an active cooling cap, we therefore do NOT recommend fitting to standard A1200s without the appropriate modifications etc.). The "ERC" Processors used on these boards are recycled and vigorously tested 68040 CPUs operating at 40MHz with MMU/FPU - an excellent guaranteed and competitively priced alternative. Available options such as the SCSI-IV Kit and RAM are shared with the Blizzard 1230-IV and 1260.

LOWER PRICE!

Blizzard 1240T/ERC Turbo 40MHz 68040 and MMU/FPU, 0Mb 32Bit Fast RAM, exp. to 128/256Mb £199.95

2040ERC TURBO ACCELERATOR MEMORY BOARD

A1500/2000 TURBO ACCELERATOR and MMU/FPU

40MHz 68040 - 0Mb Standard, expandable to 128Mb

30MIPS with 60 Nanosecond SIMM fitted.

The Blizzard 2040ERC is a super LOW COST board which offers A1500/2000 owners the opportunity to upgrade to the same performance as the Blizzard 1240T/ERC Board. Users will then be able to enjoy full A4000/040 power as well as take advantage of the built in SCSI-2 interface. The "ERC" Processors used on these boards are recycled and vigorously tested 68040 CPUs operating at 40MHz with MMU/FPU - excellent guaranteed competitively priced alternative.

Blizzard 2040ERC Turbo
40MHz 68040 and MMU/FPU, 0Mb 32Bit Fast RAM, exp. to 128Mb £249.95

LOWER PRICE!

CAN BE EXPANDED TO A FULL 68060

1260 TURBO ACCELERATOR MEMORY BOARD

EASY TRAPDOOR INSTALLATION... No modification necessary. Reliable low heat output.



A1200 TURBO ACCELERATOR and MMU/FPU

50MHz 68060 - 0Mb Standard, expandable to 64/192Mb

38.71MIPS with single sided 60/70 Nanosecond SIMM fitted.

Offers Amiga A1200 owners FULL 68060 POWER with a board that simply plugs into the trapdoor slot. Your A1200 will then operate at TWICE or even THREE TIMES THE SPEED of an '040 based upgrade and up to FIVE TIMES THE SPEED of a standard A4000! Available options such as the SCSI-IV Kit and RAM are shared with the Blizzard 1230-IV and 1260.

Blizzard 1260 Turbo 50MHz 68060 and MMU/FPU, 0Mb 32Bit Fast RAM, exp. to 64/192Mb £319.95

LOWER PRICE!

2060 TURBO ACCELERATOR MEMORY BOARD

A1500/2000 TURBO ACCELERATOR and MMU/FPU

50MHz 68060 - 0Mb Standard, expandable to 128Mb

38.71MIPS with 60/70 Nanosecond SIMM fitted.

Offers Amiga A1500/2000 owners the same specification as the remarkable Blizzard 1260 Turbo (A1500/2000s will operate at up to FIVE TIMES THE SPEED of a standard A4000) with FULL 68060 POWER and also includes built in SCSI-2 interface!

Blizzard 2060 Turbo
50MHz 68060 and MMU/FPU with SCSI-2, 0Mb 32Bit Fast RAM, exp to 128Mb £429.95

LOWER PRICE!

1230-IV TURBO ACCELERATOR MEMORY BOARD

EASY TRAPDOOR INSTALLATION... No modification necessary. Reliable low heat output.

A1200 TURBO ACCELERATOR and MMU

50MHz 68030 - 0Mb Standard, expandable to 128/256Mb

9.91MIPS with 60 Nanosecond SIMM fitted.

The highest performing 68030 Accelerator available for your A1200. With its 50MHz 68030 and MMU, the 1230-IV offers BETTER PERFORMANCE at a LOWER PRICE. With a Sysinfo rating of 9.91 (using a 60 n/s SIMM) you can see the 1230-IV is very fast... a performance gain of up to 500% is achieved! Via its Fast Expansion Bus, an optional SCSI-2 Controller module can easily be fitted. An industry standard SIMM socket provides for up to 128Mb of auto-configuring 32Bit Fast RAM (up to 256Mb with the SCSI-2 option using its extra SIMM socket).

LOWER PRICES!

Blizzard 1230-IV Turbo 50MHz 68030 and MMU, 0Mb 32Bit Fast RAM, exp. to 128/256Mb	£89.95
Fast 60 Nanosecond SIMM RAM Expansions - 32Bit, 72Pin	£Call
Motorola Maths Co-Processor - 68882 PGA type FPU, 50MHz	£39.95

MOTOROLA MOTIVATED

Blizzard and Cyberstorm products use MOTOROLA 68000 and PowerPC series processors. They run **WITHIN** the electrical timing specification laid down by Motorola to prevent any possible overheating/reliability problems. So, when you pay for a 50MHz CPU for example, that's exactly what you get... not a 40, 33 or even a 25MHz CPU "clocked" to 50MHz! Look out for the **MOTOROLA MOTIVATED** logo - your guarantee of our commitment to quality and reliability - **BEWARE** of "clocked" CPUs! T/ERC and ERC processors used on selected boards are recycled and vigorously tested 68040 CPUs operating at 40MHz - an excellent guaranteed and competitively priced alternative.

BLIZZARD SCSI-IV KIT

SCSI-2 MODULE for 1230-IV, 1240T/ERC & 1260, & ADDITIONAL 128Mb SIMM SOCKET

(Fast SCSI-2 DMA Controller - upto 10Mb/s transfer rates with additional SIMM socket/extra RAM)

Blizzard SCSI-IV Kit £59.95

What the Magazines think...

Blizzard products have consistently achieved the highest magazine accolades and awards!

Amiga Shopper *"...1260 is destined to become the ultimate object of desire for A1200 owners"* - **91% STAR BUY Award**

Amiga Computing *"...If you want the fastest Amiga in the World, get this board"* - **92% BLUE CHIP Rating**

Amiga Format *"...Ride on the fastest A1200 in the World..."* - **95% GOLD Rating**

OUR RANGE HAS WON MORE AWARDS THAN ANY OTHER

1230-IV, 1240T/ERC and 1260 FEATURES

- May be disabled with simple keystroke on boot up - for full games compatibility, even badly programmed/older software
- Battery backed self re-charge Real Time Clock
- High performance expansion with full 32Bit wide DMA
- Easy trapdoor installation - no modifications required (1240T/ERC fits in Tower)
- 1230-IV features PGA FPU socket allowing optional 50MHz 68882 FPU

JUST COMPARE THE PERFORMANCE FIGURES FOR YOURSELF!

Comparative MIPS performance figures measured using SysInfo.
Each board had the appropriate SIMM fitted which is required to fully activate the accelerators speed.



Please note: Memory, SIMM and FPU prices may change without warning due to exchange rate fluctuations. Please confirm price prior to ordering.

COMPATIBLE WITH ANY STANDARD VIDEO SIGNAL AND S-VHS!

ProGRAB™ S-VHS 24RT Plus

NEW LOWER PRICES!

The revolutionary S-VHS **ProGrab™ 24RT Plus** with Teletext is not only the best way to get crisp colour video images into your Amiga, from either live broadcasts or taped recordings, it also costs less than any of its rivals. This real time PAL/SECAM/NTSC* 24-Bit colour frame grabber/digitiser has slashed the price of image grabbing on the Amiga and, at the same time, has received rave reviews for its ease of use and excellent quality results. ProGrab™ has earned honours from just about every Amiga magazine and Video magazines too! And... with ProGrab™ you needn't be an expert in Amiga Video Technology, a simple 3 stage operation ensures the right results... **Real Time, after time.**

Take a signal from TV with SCART output

Use either Satellite signals or VCR output of TV or Video, including S-VHS

STAGE 1

Select any video source with S-VHS or composite output. This could be your camcorder, TV with SCART output, satellite receiver, domestic VCR/player or standard TV signal passing through your VCR/player... the choice is yours.

STAGE 2

With ProGrab's software, select an image you wish to capture using the on screen preview window and Grab (because the hardware grabs frames in real time, there's no need for a freeze frame facility on the source device). Once grabbed, simply download and view the full image on your Amiga screen. ProGrab also includes a Teletext viewing and capturing facility from either TV or satellite sources.

STAGE 3

Use the 'grabbed' image with your favourite word processor, DTP or graphics package. ProGrab really does make it that simple!

Grab images with your Camcorder including S-VHS

ProGrab™ 24RT Plus...

- Supports all recent Amigas and is also fully AGA Chipset compatible. You can render images in any Workbench screen mode resolution including HAM8 mode (Amiga RAM permitting).
- Saves and Loads images in IFF/ILBM, IFF/ILBM24, JPEG, BMP, PCX, and TARGA file formats. ProGrab saves animations as Anim5 files and animations with sound (requires PCMCIA interface and separate sound sampler) as Anim5 + 8SVX files. A range of image processing effects, palette computing routines (AGA only) and dithering methods are featured in ProGrab Version 2.6.x. Photogenics fully supports ProGrab with a custom 'Loader' to enable grabs directly from within the program - this direct input method will save YOU more time when handling large images.
- Software has built in mono and colour animation facilities. Number of frames is dependant on Amiga RAM.
- Release 2.6.x software now includes...
  Additional Teletext Facilities - with either terrestrial or satellite TV signals.
  Larger Preview Window - double resolution and four times area of previous ProGrab software.
  International Support - now compatible with composite PAL, SECAM and NTSC - straight from the box.
  Larger Preview Window - double resolution and four times area of previous ProGrab software.

ProGrab™ 24RT Plus costs just £99.95 LOWER PRICE!
and is supplied with just about everything you'll need◆...

- ProGrab™ 24RT Plus Digitiser
- Latest ProGrab Version 2.6.x Software
- Mains Power Supply Unit
- Parallel Port Connecting Cable
- User Manual
- Input sockets for Composite and S-VHS.

◆ A video source cable will be required to match your own equipment - ask us for details.

**Standard ProGrab hardware is PAL/SECAM/NTSC compatible. Interlace mode options are available with PAL & SECAM only.*

ProGrab supports any Amiga with Kickstart 2.04 or later and a minimum of 1.5Mb free RAM.

PCMCIA Interface - A600/1200

ProGrab's optional PCMCIA Interface includes the latest version software and extends performance for serious or professional users - offering the following benefits...

- Faster downloading times (up to FIVE times quicker)
- Improved animation speeds of up to 11fps (mono) and 3.5fps (colour)
- Saving of animations direct to your Amiga's hard drive
- Freeing of your Amiga's parallel port for use by a printer or other peripheral
- Sound sampling and animation capabilities (separate sound sampler required, see right)

PCMCIA Interface LOWER PRICE! **£29.95**

Stereo Sound Sampler

Fantastic high quality 8-Bit Sound Sampler specifically designed for use with the ProGrab 24RT digitiser (PCMCIA Interface is also required).

This Hi-Fi sampler features the same 30MHz A/D convertor used in the ProGrab, maximum frequency is therefore only limited by your Amiga hardware.

Featuring a band width of 40Hz to 20KHz, quality is higher than standard samplers.

Hi-Fi Stereo Sampler £24.95

ProTel™ Terrestrial/Satellite Teletext Decoders

Amiga or PC add ons for grabbing terrestrial or satellite TV Teletext pages which don't need a dedicated Teletext TV/Video to operate... required signal is simply the output taken from a standard VCR or a TV that provides a suitable video out signal. Once information has been downloaded, ProTel allows you to view pages instantly... no more waiting whilst your TV searches!

ProTel™ for Amiga

Stand alone unit designed to match your Amiga allowing files to be exported as ASCII Text for use in your word processor or saved as IFF graphics for DTP presentations.

ProTel™ Amiga Teletext Decoder £44.95

ProTel™ for PC

NEW

ProTel PC Teletext Decoder - internal ISA PC card:

- Friendly software
- Capture speeds of 1000 pages in 2 mins
- Background tasking • Easy configuration
- Save page files (ASCII, BMP, ProTel formats)
- Native 32Bit Windows '95 application
- Requires 386DX PC and 8Mb RAM (12Mb Rec.), Windows '95/3.1 or Workgroup 3.11, VGA display, Mouse and 1 free 8/16Bit ISA slot - MINIMUM
- PAL and SECAM

ProTel™ PC Teletext Decoder £29.95

Camcorder User commented... "If you're looking for a high resolution 24 bit digitiser then, at this price, ProGrab 24RT represents great value for money*."*

ProGrab™ - Voted as The Best Video Hardware *product for the Amiga. Especially pleasing because the award comes from Amiga Shopper magazine's readers... Satisfied Customers!*

ProGrab™ - Amiga Format 93% Gold Rating *and comments like... "ProGrab 24RT Plus is quite simply the digitiser to get", "Incredible value for money - no other digitiser offers so much for so little" and "Offers far more features than any other digitiser near the same price"*

ProGrab™ - Amiga Shopper 95% STAR Buy *and remarks like... "Sharp, crisp and faithful to the original colours, we were mightily impressed" and... "Highly Recommended. Whether you are a Videographer or a Graphic Artist, look to the ProGrab 24RT Plus. It's a winner"*
Hi-Fi Stereo Sampler - Amiga Shopper 92% STAR Buy, April 1997.

CU Amiga said ProGrab™ is... "Just the job for beginners and semi-professionals on a tight budget" and, "very hard to beat. For the money, nothing can touch it*"*

AT GH WE MAKE EVERYTHING EASY...

PHONE GH...
We welcome all major credit/debit cards with NO TRANSACTION SURCHARGES.

ORDERING BY POST OR FAX...
Please include your Name, Address and preferably daytime and/or evening phone or fax number with your requirements. If using your debit/credit card include its number and valid from/expiry dates (also issue number with Switch cards). Please make cheques (allow 7 days clearance), Drafts or P.O.s payable to... **Gordon Harwood Computers Limited.**

GH PRICES...
All UK and EC customers - VAT is included at the standard rate of 17.5% to all prices. UK overseas Armed Forces Personnel may be exempt VAT - please ask for details.

DELIVERY...
We offer prompt shipment with fully insured express delivery options throughout the UK, Europe and Worldwide at a modest cost. If ordering by mail, please call to confirm the appropriate delivery charges.

GH WARRANTY...
Manufacturers' standard warranties apply or, ask about GH's comprehensive extended options which are always recommended for professional users to minimise costly down time - details available on request.

ALL PRICES INCLUDE VAT
...and are shown for personal users only. Business users please ask for VAT Exclusive prices.



If you prefer, you can collect your Amiga goods from us...

AN EASY DRIVE FROM MOST AREAS,
We're open Monday to Saturday 9.00am until 5.00pm...

PLEASE CALL TO CONFIRM AVAILABILITY BEFORE MAKING A LONG JOURNEY TO VISIT US.

Final Data 3



LOWER PRICE!

A Powerful yet simple to use database with extensive features enhancing your potential to store important information EASILY.

Now in its third release, Final Data 3™ retains its ease of use and unique method of simple data definition and entry - but, also includes more advanced features too!

Even first time users can produce their own personal information files immediately! As you progress, you can take even more advantage of...

Running Calculations, Multiple Line Memos - enter an unlimited amount of text for each record, An extensive Query Requester and... Final Data 3 features such as... Hidden Columns, Redefinition of Data (eg. from Text to a Memo column), Graphics, Sound and Animation (Requires use of Datatypes found in Workbench 3.0 or above).

- Easy definition of columns for categories of information such as name, house number, street, town, county, postal code, phone number etc.
- Built-in routines for rapid label printing
- Print/mail merge with word processors
- 'Memo' feature, acting like a 'Post-It' note, to enter large amounts of text within any record

For Amigas with floppy or hard drives running Workbench 1.3 or later & a minimum of 512K of free RAM (HDs - 1Mb)

☆☆☆☆☆NEW LOWER PRICE!☆☆☆☆☆

SoftWood Final Data 3 **£19.95**

THE APPLE ALTERNATIVE

IF YOU'VE REALLY GOT TO BUY A NEW SYSTEM TODAY...
the next best thing to your Amiga could be an Apple Macintosh.

BUT WHY MACINTOSH?
Just like your Amiga, all Macs are Motorola based but have had the advantage of PowerPC RISC CPUs for some time - remember, even Pentium PCs in Windows™ systems are still merely CISC processors! Like the Amiga, Macs were designed from the outset to be an easy to use system with their windowing environment fully integrated - not bolted on later. And... Macs not only outperform other PC systems, but have recently become very competitively priced too.

Software: there are over 1800 titles specifically written for PowerPC Macs alone, plus thousands from pre PowerPC days which are still compatible. Industry standards such as Word, Pagestream, Word Perfect, FileMaker Pro, Excel, Quark XPress, Photoshop and many others have been developed for Macs.
Creativity: Apple still lead the creative world - 80% market share in colour publishing, most web sites are authored with Macs and post production video editing is dominated by the Macintosh too.
The magazine you are reading now was published using Macs!
Internet and Communications: all Macs are Internet Ready - many include built in modems and fax facilities etc. and standards like Netscape and Internet Explorer ensure the Net is easily accessible.
Connectivity and Expandability: all Macs incorporate built in networking and external SCSI connections - adding printers, drives, scanners etc. really is plug and play!
Education and Edutainment: Macs offer you the advantage of all the latest software from the likes of Dorling Kindersley, Microsoft etc. to help with the whole family's learning skills.
Multimedia: Apple is the World's No.1 Multimedia PC Vendor!
Recreation and Games: Some of the top selling games are available on the Macintosh including Ultimate Doom, MYST, Rebel Assault II, Dark Forces, Descent, Full Throttle and many more!
WANT ONE? Well, if you really want more performance without paying the earth - and you want it now... contact Harwoods - it may be easier than you think, especially with our finance facilities catering for both business and personal users (subject to status).

Apple Authorised Reseller & Service Provider

THE PERFORMANCE OF OUR NEW POWER UP BOARDS WITH POWER PC PROCESSORS!

gordon harwood computers

GH 15TH ANNIVERSARY
1982-1997

We've been providing Commodore products since 1982 and today supply a range of 100% Motorola based systems including Blizzard and Cyberstorm along with video products and other peripherals...

01773 836781

PICK UP THE PHONE AND ORDER TODAY FOR DELIVERY TOMORROW

For your protection all Cards are fully Security Checked

OFFICIAL ORDERS...
We supply Central, Local Government and Education Departments along with Major PLCs

'FAST-FAX'...
on 01773 831040 for a Rapid Response to your Quotation or Order Requirements!

GH™
GORDON HARWOOD COMPUTERS

DEPT CUA/6 • NEW STREET
ALFRETON • DERBYSHIRE
DE55 7BP
Tel: 01773 836781
FAX: 01773 831040
e-mail: info@ghc.co.uk

This advertisement is an invitation to treat, not an offer to sell. Goods are not supplied on a trial basis. All transactions are subject to Harwood's Terms and Conditions of Sale, a copy of which is available on request.

Graphics considerations

I did say that the CPU power of your Amiga emulating a Mac would be as good or better than an equivalent Mac. However, there's still the issue of graphical display. You can get an Amiga to put out an absolutely stunning monochrome Mac display, but because of the Mac's chunky graphical format (the same thing that keeps Doom clones slow on the Amiga), when you switch to colours, your native Amiga chipset gets a little overwhelmed. Fusion comes with a variety of specially-tailored graphics drivers to try to make up the difference.

Shapeshifter has native support for ECS and AGA, but if you find that these are not enough for you, there are third-party video drivers for AGA and ECS Amigas. These require a large amount of RAM just to use, but you gain in graphical output.

The optimum solution is to run a CyberGraphX or Picasso96 graphics card. Even an old Zorro II A2410 board gives a marked improvement over plain Amiga output.

ShapeShifter vs Fusion

The two big boys of Macintosh emulation must surely be Christian Bauer's shareware ShapeShifter and Jim Drew's recent commercial effort, Fusion. Both packages set out to the same end but get there via different routes. ShapeShifter has been around a lot longer and due to the shareware aspect, there are a great deal more people using it so there is a host of third party support material from documentation to video drivers.

That said, Fusion boasts a host of additional features and performance gains that make it ideal for Macintosh gaming. Direct draw modes to graphics boards is probably the most important and makes Fusion a good deal quicker at running taxing 3D games. There's also a PowerPC version in development for phase 5's PowerUp cards. The first version of Fusion was plagued with difficulties that made it difficult to get up and running but an updated Fusion 2.0 was released to address these issues.

If you're starting out on Mac emulation then you'd be well advised to give Shapeshifter a bash first. It won't cost a penny and you've a good chance of finding some help if things go pear shaped. You may find it is enough. When ShapeShifter is up and running, you can consider upgrading to Fusion which will offer serious performance gains. Look for a review of Fusion 2.0 in the next issue of CU Amiga.

Alone in the Dark Trilogy

▲ Full 3D games in the Quake style will still need plenty of horsepower, and preferably a graphics card, but there are plenty of decent games with lesser requirements.

you can simply delete the file and use the space for Amiga storage once again.

Add a new drive

If you're really serious about Mac emulation it's probably worth considering the addition of a whole new physical hard drive purely for the Mac side of things. Hard drives are getting cheaper all the time, and even a basic A1200 can easily use up to four hard drives from the internal IDE connector (with the help of a splitter). This is the neatest option and you get the best of both worlds: good transfer speed, no backing up of your existing data, and you can still re-format the drive for Amiga use if you get fed up with playing around with the Mac.

When your Amiga is in Mac mode, it will only be able to access the Mac partition. Accessing your Amiga partitions is not possible, so make sure you have enough space on your Mac drive for the OS , the software you intend to use and also storage space for saving projects (if you get bored of games and get into Photoshop for instance).

There are a few things you should keep in mind before setting out to gather as many Mac games as you can lay your fingers on.

Emulator compatibility

Overall, both ShapeShifter and Fusion do a very reliable job of emulating a modern-day Macintosh. This means you can run most of the latest software, and it also means that the software that wouldn't be compatible with a modern Macintosh isn't compatible with your emulated Mac either. Such examples include software which 'broke' when Apple moved from System 6 to System 7, and software compiled for the old 24-bit memory model. Typically, these are limited to 80s titles, usually black and white (from before Macs had colour – remember that?). Fusion can make a couple of exceptions for more modern titles which are 'not quite 32-bit' – more on that when it comes up.



Game types

The Mac market is more suited for certain types of games than others, for a few historical and practical reasons. There's a noticeable lack of beat 'em ups and platformers on the Mac for two good reasons: one, the Mac user base is more family and professionally oriented than the Amiga, and two: there's hardly anybody with a Mac joystick! The Amiga was conceived partly as a gaming machine and so it inherited the Atari/Commodore 9-pin joystick port, making tens of millions of joysticks ready to be plugged in. The Mac uses a custom bus for input devices, making joysticks expensive, rare, and (as a result) virtually useless. You could probably find a pricey flight stick, but getting a cheapie hand-held joystick is almost out of the question, and few games would support it.

So, keep in mind the sort of games you can control with keyboard or mouse easily – that's what you'll be finding – stuff like strategy games, Flashback-style action, Breakout/Arkanoid, Doom clones, flight simulators for example. ■

Jason Compton

Lucky
MINI MART

Police Quest IV

Damage

HEALTH SPA
Leisure Suit LARRY

Leisure Suit Larry VI

◀ Adventure games play very well due to the lack of large graphics being thrown around the screen.

Real games, real systems

It's all very well say things like you need a 'fast' Amiga to run 'recent' games, but what does that really mean? We tested a range of games to find out just what's required to make them tick. The system requirements listed are those we feel are necessary to do the game reasonable justice.

Game	Description	System requirements	Five star rating
Duke Nuke 'em Atomic Edition	Action packed Doom-alike with added humour and a distinct lack of wizards	CD-ROM, 50MHz 030 minimum, graphics card	★★★★★
Dark Forces	Like Duke Nuke 'em only with a Star Wars theme and added atmosphere	CD-ROM, 50MHz 030 minimum, graphics card	★★★★★
Marathon	More 3D mayhem, stripped of most of the strategy with plenty of action	CD-ROM, 50MHz 030	★★★
Sim City Classic	Manage and develop your own metropolis in a strictly strategy style	CD-ROM, 68030	★★★★
Leisure Suit Larry 6	Lewd graphic adventure with CD-spool soundtrack, verging on childish	CD-ROM, 50MHz 030 minimum	★★★
Brain Dead 13	Attractive animated sequences strung together with minimal gameplay	CD-ROM, 50MHz 030 minimum, graphics card	★★
A-10 Attack!	Unimpressive combat flight simulator that looks very basic next to TFX	68040 only	★★★
Masterpieces of Infocom	Most of the classic Infocom text only adventure game back catalogue	68020 only	★★★★★
Alone in the Dark Trio	Clever and engrossing 3D graphic adventure game in three installments	CD-ROM, 50MHz 030 minimum, graphics card	★★★★
Arashi	Shareware version of the 80s cult vector-based shoot 'em up Tempest	68030 only	★★★★
Rescue	Star Trek-based shareware space battle strategy game with basic graphics	50MHz 030, graphics card	★★★★★
Solarian II	Shareware Galaxians variant that looks tedious but is fun in short busts	68030 only	★★★

AMIGA Technologies GmbH
AMIGA 1200
AMIGA MAGIC
170 MB Harddisk-Drive
+ SCALA MM 300

AMIGA® INTERNATIONAL, INC.

At Last, the Amiga is BACK ON SALE with NEW machines from Amiga International Inc. All machines are full UK Specification and come bundled with WordWorth v4SE (Word Processor), TurboCalc v3.5 (Speadsheet), DataStore v1.1 (Database), PhotoGenics v1.2SE & Personal Paint v6.4, Organiser v1.1, Pinball Mania, Whizz and now ..... Directory Opus 4.12!

All Hard Disk models also include the above software & Scala MM300 pre-loaded, the Official Amiga Hard Disk manual & HD Install disk.

FREE UK DELIVERY

MONITOR OPTIONS

Low Cost 14" Monitor
15Khz Only
TV Display
Remote Control
Amiga Cable Supplied
£159.99

Professional 14" Monitor
MultiSync 15 - 31.5Khz
Flicker Free Display
Amiga Cable Supplied
£249.99

AMIGA 1200 MAGIC PACKS

68020/14.3MHz
2MB RAM
No HD
£249.9

68020/14.3MHz
6MB RAM
170MB HD
Scala MM300
£349.99

68030/40MHz
10MB RAM
170MB HD
Scala MM300
£419.

68040/25MHz
18MB RAM
1.3GB HD
Scala MM300
250w PSU
£599.99

68040/40MHz
34MB RAM
1.3GB HD
Scala MM300
250w PSU
£699.

HARD DISKS

FREE UK DELIVERY

Complete Expansion Kit Solution for the Amiga A1200

FREE OPUS 4.12 worth £50

3 YEAR WARRANTY

Yes, at long last, a professional way to install a high capacity hard disk WITHOUT removing parts from your machine or bending your keyboard around the drive. Our packs come with EVERYTHING you need to install the drive into an A1200, Cables for power and data, Instructions & 7 disks FULL of HOT software such as Directory Opus 4.12 (worth £50), MUI 3, MCP, Galaga AGA, Virus Checker, Mods, ReOrg, ABackup and MUCH MORE. All software can be installed with our custom click 'n' go system. All drives are pre-installed with the system software & above disks - unlike others we provide the disks just in case!

1.3GB £159.99
2.5GB £219.99

WANT US TO FIT YOUR HARD DISK FOR YOU? CALL FOR MORE DETAILS.

REPAIRS

by Qualified Technicians

- All Amiga Computers Covered
- Prices from as little as £29.99
- Many repairs by Wizard require NO Parts
- Prices include *Insured Courier Collection & Delivery*, Labour, Full Diagnostics, Service, Soak Test & VAT.
- Fast Turnaround
- All Technicians are Fully Trained & Qualified
- Upgrades bought at same time fitted FREE!
- 90 days Warranty on all Repairs

PRICES INCLUDE COLLECTION & DELIVERY

All for just £29.99 + parts

PARTS

We have a large range of parts for ALL Amiga's - Drives, Keyboards, Mouse Ports, Chips and more. Please call for pricing details.

MAGNUM

A1200 Expansion Cards

FREE OPUS 4.12 worth £50

Speed Increase of up to 27 times ◆ 68030/EC, 68040 or 68060 Processo running at 33, 40 or 50MHz ◆ MMU in ALL processors (except 68030EC type ◆ '040 fits Standard A1200 - no problem & is supplied with a Heatsink & Fan ◆ Up to 32MB of RAM can be added ◆ Kickstart ReMapping (except 68030EC version) ◆ Optional SCS interface ◆ Can accommodate a 72-pin SIMM ◆ 68040/60 have built-in FPU ◆ Battery Backed Clock/Calender ◆ PCMCIA compatible so you can still use products such as OverDrive HD or CD/Zappo CD-ROM or Squirrel ◆ Zero Waite State Desig

SCSI-II Interface for the Magnum 68030/68030EC/68040 & 68060 Cards - Supplied with Software - £79.99

	0MB	4MB	8MB	16MB	32MB
'030/33 & FPU	£89.99	£109.99	£129.99	£159.99	£209.
'030/40 (68030EC Chip)	£89.99	£109.99	£129.99	£159.99	£209.
'030/40 & FPU (68030EC Chip)	£99.99	£119.99	£139.99	£169.99	£219.
'030/50	£119.99	£139.99	£159.99	£189.99	£239.
'040/25 & FPU	£179.99	£199.99	£219.99	£249.99	£299.
'040/40 & FPU	£229.99	£249.99	£269.99	£299.99	£349.
'060/50 & FPU	£349.99	£369.99	£389.99	£419.99	£469.

560DPI 3 BUTTON MICE & MATS



for all Amigas & Atari STs

Award winning 560dpi Resolution ◆ 90% rating in CU Amiga ◆ Micro Switched Buttons ◆ Amiga/Atari ST Switchable ◆ All 3 buttons can be used with many programs such as Directory Opus 5

FREE THIRD BUTTON DRIVER DISK

BEIGE or BLACK £12.99
MAT £2.99 or £1 with a mouse

PowerBox

250w Amiga Power Supply

Power-Up your Amiga with this 250w Enhanced Amiga PSU for little more than the price of a normal 25-30w Amiga PSU! Designed for A500/600 & 1200 (CD32 also available). Encased in Steel Subsystem, All Cables Supplied, Whisper Quiet Fan, Illuminated On/Off switch, Monitor outlet on back of PSU, Only Quality/New PSU's used, 3.5" & 5.25" power cables available to power external CD-ROMs Hard Disks etc.

£49.99

POWERSTRIP

Power 4 normal plugged devices (monitor, printer, speakers etc) direct from the back of PowerBox. Turn ALL products on/off with just ONE switch.

£19.99

FREE OPUS 4.12 worth £50

Speed Increase of 2.3 times - 2.88mips ◆ Available with 0 or 8MB of 32-bit RAM installed ◆ Uses a Standard 72- Simm ◆ Optional PLCC Type FPU (floating point unit) ◆ Battery Backed Clock/Calender ◆ Finger CutOut to he Installation ◆ Trapdoor Fitting - doesn't void warranty ◆ 0-4 pcmcia compatible (for use with overdrive, squirrel etc.) ◆ Zero Waite State Design.

FREE UK DELIVERY

FROM £39.9

	0MB	4MB	8MB
RAM8	£39.99	£59.99	£79.99
RAM8 & 33MHz FPU	£54.99	£74.99	£94.99

LOWEST EVE PRICES!

DIRECTORY OPUS 5

THE ULTIMATE WORKBENCH REPLACEMENT & FILE MANAGEMENT SYSTEM

VERSION 5.6 NOW SHIPPING

Combines the Easy to use Workbench Environment and the POWER of Opus in one ◆ Replace and Enhance Workbench ◆ OpusFTP to open an FTP site as a File Lister ◆ Internal Multi-Tasking so you can perform MULTIPLE file operations SIMULTANEOUSLY (Workbench can't!) ◆ File-Type Specific Pulldown Menus ◆ Hotkeys ◆ Scripting ◆ Extensive Drag 'n' Drop throughout ◆ Advanced ARexx support ◆ Picture, Sound & Font Viewer ◆ MUI & NewIcons Support ◆ Sort file Lists & display Versions and FileTypes ◆ CyberGraphic Supported



Workbench 2+ & Hard Disk Required

£49.99

TURBOPRINT 5

CALL ABOUT UPGRADES

Printer Enhancement Software

If you have a printer - you MUST get TurboPrint. It radically enhances the printouts you normally get by replacing the Amiga Printer System with the Faster and Visibly Better TurboPrint System. Options include Poster Printing, Colour Correction, Dithering, Colour Balancing, On-Screen Preview and Much More... Most printers are supported - call to check. Version 5 includes "Graphic Publisher" to load multiple pictures, individual colour correction, rotate, twist and more. Enhanced TrueMatch colour correction, New drivers for HP, Canon, Epson Stylus and Citizen models. Amiga Format Gold. CU Awards.

£49.99

SATURN

External 1mb Floppy Drive for all Amigas

Compatible with ALL Amigas ◆ High Quality SONY Drive ◆ Robust Metal Case ◆ Anti-Click as Standard ◆ Enable/Disable Switch ◆ Low Power Consumption ◆ Thru Port for Extra Drives

£39.99

FREE OPUS 4.12

With PowerCopy Hardware/Software Backup System & 3 Games

£49.99

PC TASK 4

CALL ABOUT UPGRADES

Advanced 486 PC Software Emulator

VERSION 4.2 NOW SHIPPING

Featuring Advanced 486 software Emulation, Dynamic Compilation for faster emulation, up to 16MB accessible under MS-DOS, MDA, CGA, EGA, VGA & SVGA supported, up to 256 colours on an AGA machine, CyberGraphic support, Multiple hard disk files or partitions Supported, CD-ROM and High Density drives supported, Run MS-DOS applications in a window on Workbench! Run Windows 3.1 in Enhanced Mode! Many times quicker than version 3.1.

Requires Kickstart 2.0 or above & a 68020 Processor or Better.

69

EasyLedgers 2 - The ONLY full accounts package, Amiga Format Gold - Call about Trail Offer - Hard Disk & 2mb RAM Required - £119.99

GP Fax - Send Faxes to and from your Amiga. Even Fax directly from your application. Amiga Format Gold - Amiga Computing 9/10 - Fax Compatible Modem Required - £44.99

ImageFX 2.6 - The most complete Image Processing Package there is for the Amiga. Amiga Format Gold - CU Award - 2mb & Hard Disk Required - £179.99

33MHz FPU KIT

PLCC Type FPU & Crystal - will fit most cards - call to confirm - £29.99

A500 512k RAM Expansion	£14.99
A500plus 1mb RAM Expansion	£19.99
A600 1mb RAM Expansion	£19.99

All with a FREE Opus 4 worth over £50

50 2S/DD Disks & Colour Labels	£14.99
100 2S/DD Disks & Colour Labels	£24.99

4mb 72-pin SIMM	£20
8mb 72-pin SIMM	£40
16mb 72-pin SIMM	£70
32mb 72-pin SIMM	£120

All SIMMs are NEW and have a 1year Warranty

BSB

Books & Videos

- Insider Guide - A1200
- Insider Guide - A1200 Next Steps
- Insider Guide - Assembler
- Insider Guide - Disks & Drives
- Insider Guide - Workbench 3 A to Z
- Total! Amiga - Workbench 3
- Total! Amiga - AmigaDOS
- Total! Amiga - ARexx NEW
- Total! Amiga - Assembler
- Mastering Amiga Scripts
- Mastering Amiga Beginners
- Mastering Amiga Printers
- Mastering AmigaDOS 3 - Reference
- Mastering Programming Secrets

AmigaDOS Pack
Total! Amiga - AmigaDOS & Mastering AmigaD
- Reference Usually £43.94 - SAVE NEARL

A1200 Beginner Pack
2 books (Insider A1200 & Next Steps), a 60 Minut
4 disks of PD to go with the books/videos

A1200 Workbench 3 Booster Pack
2 books (Disks & Drives & Workbench 3 A to Z), a 5
minute Video, 1 disk & Reference Card

** BUY 2 OR MORE BSB PRODUCTS ** AND GET 10% OFF! **

ORDER HOTLINE

0181-303-1800

FAX 0181-303-1861

WE ARE OPEN 9AM AND 5.30PM, MONDAY TO SATURDAY, TO PAY BY CREDIT CARD. TO PAY BY CHEQUE OR POSTAL ORDER PLEASE SEND YOUR ORDER TO - WIZARD DEVELOPMENTS, PO BOX 490, DARTFORD, KENT, DA1 2UH

VISA MasterCard SWITCH

CONTACT US ON INTERNET
sales@wizard-d.demon.co.uk

WIZARD DEVELOPMENTS

FREE UK DELIVERY

Cheques should be payable to WIZARD DEVELOPMENTS. Prices include VAT & carriage to the UK mainland. Please add £5 for EC destinations and £10 for other countries. All products are subject to availability. E&OE. Advertised prices & specification may change without notice. All sales are subject to our trading conditions - copy available on request.

AMIGA REPAIRS

FIXED PRICE ONLY £38.99 Incl. (A500/+,600 and CD32 Only

- *Price includes PARTS, LABOUR & VAT
- *90 Day Parts and Labour Warranty
- *24 Hour turn-around on most repairs
- *Includes FULL DIAGNOSTIC, SERVICE & SOAK
- *Upgrades fitted free with repair
- *If drive/keyboard needs replacing + £10.00

(add £6.00 for return carriage)

EST. 16 Years

AMIGA A1200 Repairs only £48.99 Fully Inclusive

******Repairs while-you-wait add £10.00******

COMPONENT SPARES

We are the largest distributor and retailer of Amiga spares in the UK. with an inventory of some 150,000+ parts. Large quantity discounts and catalogue available to trade.

LOW PRICE

WE CAN SUPPLY & STOCK EVERY AMIGA SPARE

SPECIAL OFFERS

A500 Internal Drive	£28.99	A500/600/1200 PSU	£25.99
A600/1200 Int.Drive	£28.99	A1200 Keyboard	£34.00
KickStart 2.05	£19.90	A600 Keyboard	£19.00
Super-Buster IC	£15.00	A500 M/Board v6	£58.00
A520 Modulator Xchg	£18.00	CD-32 PSU	£25.00
8520 CIA	£12.00	CD-32 CDROM Drive	£35.00

CHIPS **KEYBOARDS** **CASES** **PSUS** **DRIVES** **PCBS**

AMIGA PC KEYBOARD ADAPTOR (All Amigas) £25.00 PC Keyboard £16.00

Postage & Packing add £3.00

DART Computer Services
105 London Road
LEICESTER
LE2 0PF

SALES (0116) 2470059
FAX (0116) 2558643

The Guild of Master Craftsmen

DART Computer Services

BUILD MUSCLES FAST!



NEW! Fastest way to build muscles and strength without weights – EVER! Just 35 minutes daily in the privacy of your home will develop an amazing physique.

MUSCLE DYNAMICS is a new body building system based on principles developed after years of exhaustive research. It is a total exercise programme involving the very latest scientific breakthroughs in the field of muscular development. It is the fastest, most effective way to build muscles in existence.

Noticeable results in 28 days guaranteed.

Send for FREE Information Pack.

MUSCLE DYNAMICS,P.O. BOX 70, DOUGLAS, IM99 1EH.
Tel: 0624 801023 (24 hrs)

MUSCLE DYNAMICS,P.O. BOX 70, DOUGLAS, IM99 1EH

Yes! I want to build muscles fast. Please rush me a FREE information pack!

Name..BLOCK

Address..CAPITALS

....PLEASE

.... Postcode ....

(A stamp for reply appreciated)



SPECIAL RESERVE NEW CLUB SHOP

UPMINSTER GRAND OPENING OCT 18TH

209-213 St. Mary's Lane, Upminster. Opposite Somerfield

✓ Pre-release games to try ✓ Special attractions ✓ Free gifts
✓ Competitions ✓ Meet Games Master's Dave Perry

Feel free to come along for a fun day out for all the family

A500 Software

(HDR) = HARD DRIVE REQUIRED

G 100 (100 SHAREWARE GAMES)	9.99
ANNON FODDER 2	13.99
HAMPIONSHIP MANAGER 2	22.99
HAOS ENGINE 2 92%	19.99
OLONIZATION	13.99
OLOSSUS CHESS X (NO12)	4.99
OVER GIRL STRIP POKER	9.99
RICKET CAPTAIN (NOP)	3.99
RICKET MASTERS	13.99
AILY DOUBLE HORSE RACING	3.99
ELUXE PAINT 3 ery powerful art and animation package ith extensive features. A best seller and a p award winner. Many font and printing ptions and sample animation and art cluded. (Installable)	4.99
OGFIGHT	9.99
UNE 2 - BATTLE FOR ARRAKIS	12.99
URO LEAGUE MANAGER 2MB	12.99
1 MASTERS	13.99
117A NIGHT HAWK	9.99
15 STRIKE EAGLE II	13.99
19 STEALTH FIGHTER	13.99
ELDS OF GLORY	13.99
OOTBALL COLLECTION VOL 1 LUB FOOTBALL, CLUB AND COUNTRY, EMBLEY INT'L SOCCER	**14.49**
OOTBALL MASTERS	13.99
UNSHIP 2000	13.99
ICRO FRENCH (8 TO ADULT	19.99
ICROPROSE GOLF	9.99
INSKIES FURBALLS THE ABDUCTION	10.99
RIMAL RAGE	19.99
AILROAD TYCOON	12.99
ENSI WORLD OF SOCCER 96/97	18.99
ENSI WORLD OF SOCCER ATA DISK 96/97	9.99
ETTLERS	13.99
LENT SERVICE 2	13.99
MON THE SORCERER	9.99
TARLORD	9.99
PER PACK PER SKIDMARKS, SUPER TENNIS, PER LEAGUE MANAGER	**10.99**
PER SKID MARKS	7.99
EME PARK	14.99
IVIAL PURSUIT (HARD DRIVE QUIRED)	1.99
O ENEMY UNKNOWN	13.99
NG COMMANDER	9.99
ORDWORTH V5SE fessional word processor. Features WSIWYG display, desktop publishing tures and spell checking. Very easy to e interface and excellent printing options stallable)	17.99
ORMS	11.99

A1200 DESIGN PACK

DESIGN & PRINT PACK FOR A1200 CONTAINS WORDWORTH 2.0, DELUXE PAINT IV AGA, PRINT MANAGER, OSCAR & DENNIS	9.99

A1200 Software

ACID ATTACK COMPILATION GUARDIAN, ROADKILL, SUPER SKIDMARKS	**14.99**
ALIEN BREED 3D	8.99
ALIEN BREED 3D 2 96%	17.99
CHAOS ENGINE 2	19.99
COLONIZATION	13.99
FEARS	7.99
FIELDS OF GLORY	11.99
GUARDIAN	6.99
PREMIER MANAGER 3	5.99
ROAD KILL	5.99
SLAM TILT	7.99
SUPER STREETFIGHTER 2 TURBO	14.99
THEME PARK	14.99
UFO - ENEMY UNKNOWN	13.99
WORDWORTH SPECIAL EDITION Features WYSIWYG display, DTP features, spell checking, very easy to use interface and excellent printing options	9.99
WORDWORTH V6 New features in this version include improved drawing tools, more AREXX commands, watermarks, 50 compugraphic fonts, improved RTF support and other enhancements (3MB RAM)	34.99
WORMS - THE DIRECTORS CUT	18.99

CD32 Games

ACID ATTACK COMPILATION GUARDIAN, ROADKILL, SUPER SKIDMARKS	**14.99**
ACTION PACK VOL 1 LEGENDS, FEARS, GLOOM	**14.99**
SPEEDBALL 2	1.99

PC CD TOP 15

AMIGA EMULATOR.	15.99
BROKEN SWORD 90%	8.99
CARMAGEDDON (15)	28.99
CHAMPIONSHIP MANAGER 2 97/98	17.99
CMND & CNQR RED ALERT	28.99
CMND & CNQR AFTERMATH - RED ALERT DATA CD	12.99
DUKE NUKEM 3D (18) 93%	10.99
DUNGEON KEEPER 96%	28.99
EXTREME ASSAULT	21.99
IMPERIUM GALACTICA 90%	28.99
PREMIER MANAGER 97 83%	22.99
SECRET OF MONKEY ISLAND 1 & 2	12.99
THEME HOSPITAL 91%	28.99
WARCRAFT 2 DELUXE	29.99
X-COM - APOCALYPSE 95%	28.99

PLAYSTATION TOP 15

DIE HARD TRILOGY 93%	35.99
FORMULA 1 97	39.99
INT'L SUPERSTAR SOCCER PRO	34.99
JURASSIC PARK - LOST WORLD	35.99
MICRO MACHINES 3 94%	27.99
ODDWORLDS: ABE'S ODDYSEE	31.99
PREMIER MANAGER 98	29.99
RAGE RACER 94%	34.99
SOVIET STRIKE 82%	19.99
SYNDICATE WARS 88%	35.99
TOMB RAIDER 95%	35.99
WARCRAFT 2 90%	36.99
WORMS 92%	17.99

N64 TOP 15

BLAST CORPS	46.99
F1 POLE POSITION •	44.99
FIFA SOCCER	29.99
GOLDENEYE WITH FREE 256K MEMORY CARD (RUM).	52.99
INT'L SUPERSTAR SOCCER 64	49.99
KILLER INSTINCT GOLD 88%	46.99
LYLAT WARS (90%) + RUMBLE PACK WITH FREE MEMORY CARD	52.99
MARIO KART 64 92% WITH FREE MEMORY CARD	52.99
MORTAL KOMBAT TRILOGY	49.99
PILOT WINGS 64 90%	41.99
SHADOWS OF THE EMPIRE WITH FREE 256K MEMORY CARD	52.99
SUPER MARIO 64 WITH FREE 256K MEMORY CARD	52.99
TONIC TROUBLE •	44.99
TUROK - DINOSAUR HUNTER 97%	48.99
WAVE RACE 64 92%	46.99

SATURN TOP 15

ACTUA GOLF 90%	17.99
DIE HARD TRILOGY 93% (PLG)	22.99
DRAGON FORCE 90%	34.99
PREMIER MANAGER 98	31.99
RESIDENT EVIL	39.99
SHINING THE HOLY ARK 93%	33.99
SONIC 3D 90%	29.99
SONIC JAM 92%	29.99
SOVIET STRIKE 91%	26.99
THEME PARK 92%	15.99
TOMB RAIDER 95%	29.99
VICTORY BOXING	18.99
VIRTUA FIGHTER 2 98%	19.99
WARCRAFT 2 88%	36.99
WORLDWIDE SOCCER 97 94%	19.99

WE ALSO STOCK A HUGE RANGE OF BOOKS FOR CONSOLES AND PC GAMES & HARDWARE

SPECIAL RESERVE MEMBERSHIP GIVES YOU 10 ISSUES OF THE SPECIAL RESERVE CLUB MAGAZINE

Our 48 page full colour magazine, with news, reviews and thousands of products

AND ALL OF THIS FREE

ONLY FROM Special Reserve Live @ http:// special.reserve.co.uk

Buy any one item from our entire catalogue at the same time as joining for a year (£6.00) or more and we'll give you

TOTAL SATISFACTION GUARANTEED OR ALL YOUR MONEY BACK

We'll even collect larger items from your door free of charge if you are not satisfied

EDGE
WORTH £3.50
ZEEWOLF

AND A FREE COPY OF EDGE MAGAZINE



AND THE SPECIAL RESERVE BOOK OF 2001 CHEATS

AND FREE AMIGA MEMBERSHIP PACK

Zeewolf 1 & 2, Football Glory and Quickjoy footpedals

Football Glory

ALL OFFERS SUBJECT TO STOCK.
OTHER OFFERS ARE AVAILABLE.
OVERSEAS MEMBERS PLEASE ADD £2 POSTAGE

CONTROLLERS

QUICKSHOT 137F PYTHON ...11.99
WITH AUTOFIRE

LOGIC 3 JOYPAD
9.99
AUTOFIRE

LOGIC 3
SPEDMOUSE ... 9.99
300 DPI, 2 BUTTONS

LEADS

JOYSTICK EXTENDER CABLE (3 METERS)	7.99
JOYSTICK SPLITTER CABLE	7.99
MONITOR LEAD AMIGA TO CM8833 OR 1084S	10.99
NULL MODEM CABLE (25 PIN, 1.8 METRES)	10.99
SCART LEAD AMIGA TO SCART TV	10.99
SCART LEAD CD32 TO SCART TV	10.99

AMIGA PARTS

72 PIN SIMM'S FOR PC, A4000, SX-1 AND A1200 RAM BOARDS

4 MB 72 PIN SIMM	17.99
8 MB 72 PIN SIMM	29.99
16 MB 72 PIN SIMM	58.99

EXTERNAL DISK DRIVE FOR AMIGA OR SX-1
47.99

EXTERNAL 33.6 FAX MODEM ... 69.99
SMALL COMPACT DESIGN, COMPLETE WITH CABLES, INTERNET BUNDLE AND FREE STARTER GUIDE

ANTI-SURGE 4 WAY TRAILING MULTI-PLUG	24.99
INTERNAL DISK DRIVE FOR A1200/A600	39.99
FOR A500	39.99
EXTERNAL DISK DRIVE	47.99

Over 300,000 people have joined Special Reserve. The biggest games club in the World.

Established 10 years. Special Reserve is the market leader in mail order home computing with a staff of 80.

Special Reserve
Live @ http:// special.reserve.co.uk

Special Reserve

01279 600204

OR FAX YOUR ORDER ON 01279 726842 - WE'LL FAX BACK TO CONFIRM
OPEN 9.30AM TO 8PM (MON-SAT) 10AM TO 5PM (SUN & BANK HOLIDAYS)

We only supply members but you can order as you join

Trial Membership only 50p

Trial Members receive one issue of the club magazine. Valid for one order.

Annual Membership (UK) £6.00

ANNUAL MEMBERSHIP FEES UK £6.00 EC £9.00 WORLD £12.00

Members receive ten issues of the colour club magazine per year, a free copy of EDGE, Book of 1001 Cheats and a choice FREE gift when you buy any item as you join. There is no obligation to buy anything.

All prices include VAT and carriage to MOST UK mainland addresses.

(BLOCK CAPITALS please) CU AMIGA

Name & Address______________________________

Postcode __________ Phone No__________ Machine__________

Enter membership number (if applicable) or NEW MEMBERSHIP FEE (ANNUAL UK £6.00)

item____________________

item____________________

item____________________

For **OPTIONAL** first class post add 50p per item
For **OPTIONAL** fast delivery on hardware add £3.00

ALL PRICES INCLUDE UK POSTAGE & VAT
Cheque/P.O./Mastercard/Creditcharge/Switch/Visa £

CREDIT CARD EXPIRY DATE ________ SIGNATURE____________ SWITCH (ISSUE NO______)

OVERSEAS SURCHARGE £2.00 PER ITEM - CREDIT CARD ONLY

Bristol Shop

Cheques payable to

Special Reserve at
PO Box 847, Harlow, CM21 9PH

We are mainly mail order but we also have

Four impressive Special Reserve Shops

BRISTOL AVON 351 GLOUCESTER RD (A38) 1½ MILES FROM THE CENTRE, NEAR KWIK SAVE 0117 924 5000

CHELMSFORD, ESSEX 43 BROOMFIELD RD NEAR THE BUS STATION 01245 348777

SAWBRIDGEWORTH, HERTS THE MALTINGS STATION ROAD, NEAR THE TRAIN STATION 01279 600399

STAPLEFORD, NOTTINGHAM 164, DERBY RD 2 MILES FROM J25 OF M1, NEXT TO KWIK FIT 0115 949 1000 OPENS SEPT 13TH

ALL OUR SHOPS HAVE FULL PC REPAIR AND UPGRADE FACILITIES - WE FIT ALMOST ANY ITEM BOUGHT FOR £10
SOME ITEMS BOUGHT IN THE SHOPS CARRY A £1 SURCHARGE ON THE MAIL ORDER PRICES

We GUARANTEE TOTAL SATISFACTION! Inevitably some products listed may not yet be available. Please phone to check availability. Prices may change without prior notification. SAVE = Saving off full recommended price. Sent to press 22.9.97 Errors & Ommisions Excluded.
Inter-Mediates Ltd, The Maltings, Sawbridgeworth, Herts CM21 9PG

INTENDO 64 £144.99 including controller PLAYSTATION £129.99 includes controller and 'Demo 1' CD PLUS save £10 on any other item bought at the same time

D.I.Y. AIR Link

Armed with your covermounted Printed Circuit Board, you're ready to build CU Amiga's latest revolutionary DIY project: AIR Link. Control your entire house from your Amiga and control your Amiga from your arm chair. Too good to be true?

Wondering what the circuit board is on the cover? It's AIR Link, a new easy to build DIY project that will let your Amiga take control. AIR Link is a specially redesigned version of an existing project called InfrARexx. The completed device plugs into the joystick port on any Amiga and acts as a general InfraRed receiver and transmitter. The 'AIR' in AIR Link, stands for Amiga InfraRed. What can we do with AIR Link? The simple answer is, a lot. AIR Link and the support software can learn virtually any InfraRed command sent by existing remote controls. It can also reproduce those commands under control from your Amiga.

AIR Link is capable of controlling any device which is controlled by an Infra Red controller. TVs, Videos, Hi-Fi's even special devices such as light switcher/dimmers and power sockets. AIR Link also allows your Amiga to be controlled by any spare InfraRed controller. There's a mass of applications for AIR Link and we've gone to considerable trouble to make construction of the project as simple as possible. Far easier than Project XG, for example. To build AIR Link, you will need the following;

1. The kit of components from ACL Ltd.
2. A Soldering iron.
3. Enthusiasm.

By providing the Printed Circuit Board (PCB) on the cover, the hardest work is already done. All you need to do is place the components in the holes of the PCB and solder them in. This is actually quite easy even if you haven't soldered before. In fact we've even provided some instructions on soldering technique. All you need is item number 3. in our requirements list and AIR Link can be yours. The kit of parts only costs £15, ACL will also sell a completed unit if you prefer. Either way it's a complete steal for what's on offer!

The ACL AIR Link kit contains all of the necessary components, a special ribbon with a 9-pin joystick plug on the end and a snazzy small box which the PCB perfectly fits in. We're adamant that AIR Link is so easy to construct that even if you've never done anything like this before, you're virtually garanteed to end up with a working unit.

Building AIR Link

After you've got your kit of parts from ACL, check over the parts to make sure they're all there. It should be apparent if any are missing since they are mounted in foam with labelled space for each part. In order to build AIR Link, make sure you've got a well organised workspace. Lay some paper down so any solder splashes don't mark your working surface. It will aid the speed that you can build AIR Link if you have some form of device to hold the PCB while you mount the components.

AIR LINK
AMIGA
Transmit
Receive



This could be a vice, a crocodile clip tool, pictured here, or some improvised clamp, grip.

You need to drill two holes in the top panel of the box for the LEDs. Well, you need to if you want to see the LED indicators but it's not essential. The easiest way is to insert the blank PCB into the top lid, fitting over the three long pegs. Next to the circles marked D4 and D2 there are two holes. You can use these as a guide for a drill, a drill bit as close as possible to 3mm is ideal. When finished, you can continue with populating the PCB.

Most of the components are physically different and you'll be able to tell exactly where they are supposed to go. Some others have markings which specify their type and/or value. The first parts we should install are the resistors. These are the components with coloured stripes on them and are identified as R1 to R7 on the parts template and on the PCB itself. See the box on Resistors for an explanation of the colour codes.

The basic technique for soldering parts into a PCB is as follows. Push the leads of the component through the holes. The component should be on the same side of the PCB as the white markings. Generally, they are pushed in as far as they will go unless something special needs to be done like the LEDs, see later. The resistors can go either way around, it doesn't matter. Once the leads are through the holes, pulling them outwards slightly will stop the part from falling out of the PCB when you turn it upside down. That's important because we need to turn the PCB upside down to solder the leads.

See the soldering box for some tips on



◀ **Here's an example of the ideal workspace for constructing AIR Link. You certainly don't need all of this equipment but it's fairly typical for building electronic projects.**

Resistors

Resistors use a colour code which is easier to make out on the small parts than actual written values. There's 4 coloured stripes on the most common type of resistors. The last colour will be a metallic type colour, gold or silver so you know which way to start reading from. Resistors values are measured in Ohms, we don't have space to go into the theory but the higher the number, the more difficult it is for electricity to flow through. The first two stripes are simple digits. Orange and Black would be 30 for example. The next stripe is the important one. This is the multiplier. The easiest way of looking at it is that this stripe tells you how many zeros to add. Orange (3) Orange (3) Brown (1) would make 330. One zero, see? R4, for example, is a 4K3 resistor on our parts list. That's another way of writing 4300 Ohms. So the colour code would be Yellow Orange Red. Now you can check the values before mounting them without a multimeter. Of course if you have a multimeter, you need only switch it to the Resistance/Ohms scale and place the probes on either end of the resistor. The meter will tell you exactly what value it is.

Black........0	**Brown 1**	**Red 2**
Orange 3	**Yellow 4**	**Green.......5**
Blue 6	**Grey 8**	**White.......9**

Note: The 30K1 resistor is a strange electronic value so this is a special component which should be black with the value written in numerals.

soldering. The basic technique involves applying the iron and the solder at the same time. This should be done as quickly as possible but the solder should flow neatly over the metallic pad on the PCB and the lead. Generally, all of the leads are soldered and then the excess lead is cut off, just above the solder joint.

The idea is to insert a few components at a time, solder the leads, cut them off and insert a few more components. Repeat until the entire PCB is 'populated'. We should start off with some resistors, check the resistor colours with the parts list and insert the correct ones into the three sets of holes for R3, R4 and R5. Bend the leads out slightly so that they stay in position.

Reheated joint

Solder the leads in. Now you can check that the resistors are mounted on or very close to the PCB. Otherwise, you can reheat the joint very briefly and push the part all the way in. This shouldn't normally be needed. After this, congratulations, you've performed the most difficult thing about constructing AIR Link!

Next, insert all of the rest of the resistors; R1, R2, R7 and R8. Solder them in with exactly the same technique. You should be getting good at this now and hopefully getting very good at applying as little heat for as little time as possible.

Next try C1 and C4 for the two ceramic capacitors. C1 has 103 written on it and C2 has 104. Don't try to pull the leads right through, there's a coating on the legs for a few millimeters and this needs to be left on the top side of the PCB.

The little black tin 'electrolytic' capacitors (getting interested in this electronics stuff yet?) are different. They need to be inserted the right way around. Cryptically, the PCB has the 'positive' side of the C2 and C3 electrolytic capacitors marked where as the parts themselves have the negative side marked with a stripe with minus symbols in it. Accordingly, place the lead towards the striped side in the hole opposite the '+' mark on the PCB. Getting these around the right way is vital, so take care. Next, go for the transistor Q1. This is the small black device with a flat face that has three legs. The PCB clearly has the flat side marked so you should have no problem inserting the leads in the right way. It's quite important not to heat this part up too much so be quick when soldering the leads.

Now it's time to go for the InfraRed LEDs. These are the large clear purple components. One side of them will be slightly flattened around the rim on the bottom. This matches up with the flattened edge on the PCB markings. The trick here is to bend the component leads before inserting them. The idea is that they lay down flat on top of R1. So about 3mm from the end of the plastic,



▼ **Here we're inserting the green indicator LED. Notice the way the leads are bent so that the part can poke through the provided hole in the PCB.**

bend the leads at a right angle. The leads should drop into the holes and the InfraRed LEDs D1 and D3 should lay down facing towards the edge of the PCB. Tip: You might like to make them face slightly away from eachother from side to side to offer a wider spread of InfraRed. The next task is to mount the red and green indicator LEDs, D2 and D4. This is slightly tricky as the LEDs themselves need to poke through the holes next to the lead holes on the PCB. The trick is that the leads go up about 5mm, bend 90 degrees, run 5mm and bend 90 degees again. So the leads poke 180 degrees back towards the direction the LEDs are facing. See the accompanying picture of one of the LEDs being inserted which has already had the leads bent in the correct fashion.

A tricky point is that the 3mm coloured LEDs don't have flattened edges like the larger IR LEDs. Instead, the obvious indicator is that one of the leads is shorter than the other. This one matches with the flattened side of the circle marked on the PCB. If you get this wrong, don't worry. The LED will just not work and it can be removed, turned around and it'll work fine. Now for the the most critical stage of the soldering process. We need to add the two 14-pin integrated circuit chips. There is a notch shown at one end of the chip rectangle on the PCB. This should line up with the small semi-circular indent on the end of the chips themselves. The chip that goes in the place for U1 is clearly labelled 4066 and U2 is called 4093. You might like to bend leads at the end of the IC out to hold it in place while you solder. Please note that ICs are the most susceptible to heat damage. We've left them until near last so your soldering technique should be coming along. Switch from side to side as you solder the pins, rather than in a row. Spend only a second on each pin, quickly applying the hot iron and a small amount of solder to each pin.

Now there's just the large IR receiver with three legs. It'll only go in one way but again be careful not to get it too hot. Lastly, the ribbon cable can be attached. One end of it has a header which will plug straight into the 2 rows of 5 holes. The ribbon faces outwards of course. Solder the leads just as you would IC leads.

That's it! Yes it really is that painless and what's more, beyond a quick check for components being soldered in the correct way around, we're ready to go straight to testing!

If you're not impatient, you might like to perform the finishing touches now. Insert the completed PCB into the lid of the box. The 3 pegs will go straight into the three holes on the PCB. You'll see that there's a small lip of plastic around the edge of the lid. Where the ribbon cable trails out over the edge, we must cut this lip so that the ribbon can fit through. Mark where the ribbon passes with a pencil and then cut off the lip, as per the picture here, to the same width as the ribbon.

When the PCB is in the lid of the box, the coloured LEDs should poke into the drilled holes in the top case. It's not necessary to poke all the way through since the label is transparent above the LED holes. With the PCB fitted, LEDs lined up, ribbon cable trailing through the gap in the lip around the lid, you can fit the bottom part and screw it all together. Voila AIR Link!

Testing AIR Link

It's quite difficult to put AIR Link together incorrectly. Provided that the chips and cable header are around the right way, we can safely plug the 9 pin plug into the



InfraRexx Codesets

There's a good chance that you have some IR equipped appliance that isn't represented in the provided database of InfraRexx IR codesets. No problem, as you can teach the codes to InfraRexx and save the codeset out as per our instructions here.

If you do create a codeset for a new piece of equipment, we'd very much appreciate if you could send us the codeset to add to our database. Then on the following CD we'll include all of the codesets and on our CU Online web site too. If we have space, we may even put them on the floppy disk issue. If you make a codeset, we ask that you name it as follows;

`<brand>-<description>_<model>`

Examples: Sony-Minidisc_MU10, Panasonic-Video_JV211, Fisher-Amp_CD30R Descriptions currently in use; CD, TV, Video, Minidisc, DAT, DCC, VidProj, Relay, Dimmer, Amp, Tape, Turntable, SatDec, CableDec and Multi. The last description is a special example where the codeset matches multiple models and types of equipment in the brand range. Most of the provided codesets are already of this type.

Example: `Sony-Multi`

We'd ask that the Codeset description line lists which models the Codeset has been tested with both for single and multi codesets. Generally the convention for the ARexx Transmit command is somewhat like

`<DESCRIPTION>_<ACTION>`

Example: `TV_CH0, CD_FF, TAPE_REW`

The closer you stick to this convention, the more useful the IR codeset database will be to everyone. Thank you very much in advance for sending in yours. AIR Link codeset, CU Amiga Magazine, 37-39 Millharbour, Isle of Dogs, London, E14 9TZ.

Since they are small, you may MIME attach them in an E-mail to mat@cu-amiga.co.uk or use the FTP site as details on the CD submissions page on page 94.



▶ Here we're cutting away a portion of the plastic lip around the box. This will allow the ribbon cable neat exit while still being held firm.

Amiga's joystick port. AIR Link is now powered and operational! The quickest test is to point a remote control at it and press a key. If all goes according to plan, the green LED should pulse indicating that AIR Link is receiving InfraRed data.

If this doesn't happen, unplug AIR Link and check over the components. For it not to work, something should be quite obviously wrong in the construction.

The next step is to fire up the software and send an InfraRed signal. Run the program InfraRexxEditor. Select Load from the Project menu and go into the Codeset directory and pick one of the files. A list of functions will appear in the Infrared Codes lister. Double click on one of these and another window will open. Pressing the Send button underneath the Code Learner section should make AIR Link transmit.

The Red LED should flash as the button is pressed. The Green LED will normally also flash as AIR Link picks up its own InfraRed transmission. If this all functions correctly, congratulations! You've built a 100% working AIR Link.

What is InfraRed?

InfraRed is a form of electromagnetic radiation, as is the light that we can see visibly. The frequency of light is perceived by the human eye as colours. The highest are violets and blues. The lowest are deep red. You may have seen an illustration of the light which comes out of a prism. This shows you the full spectrum of light components that we see.

InfraRed is light just like Red light only it's of a lower frequency. So low that we can't actually see it but it behaves in the same way as normal light. Just as we get LEDs that emit green and red light, AIR Link uses InfraRed LEDs that emit InfraRed which is totally invisible to us. It is visible to AIR Link which has a dedicated InfraRed receiver.

InfraRed is ideal for remote control applications where you have line of site to the device you wish to control. This method was adopted over the early radio remote controls as things were rapidly going to get out of hand with households using multiple radio transmitters. It's a bad thing if your remote can change your neighbours TV!

It's one thing to shine and pick up InfraRed light but it's another to convey some type of information. To do this, the light is 'modulated' at a frequency typically between 30 and 40Khz. This is done to reject interference from normal IR sources such as sunlight. The modulated InfraRed is then pulsed in a serial bitstream.

Different brands use different modulation frequencies and bit rates. They also have different lengths of the bitstreams which identify each of the functions. We need to discover these variables on the remotes and devices we wish to use. It's the job of the InfraRexx Editor to learn the codes so that we can retransmit them.

Soldering



The art of Soldering isn't a hard one to pick up. Not only does it make building AIR Link possible but it can come extremely handy around the home. Soldering can be used to fix metalic breaks, wire up special cables or repair broken ones. All we need to solder is a soldering 'iron' and some solder.

To solder in safety and with the maximum success, it's wise to do it on a covered surface so splashes of molten solder don't damage the surface. Molten metal might sound worrying but solder itself melts at a very low temperature for metal. It's very capable of burning you but we're not talking about red hot glowing forges here.

There's a world of difference between something like a plumbers soldering iron and an electronic soldering iron. The electronic unit will have a much smaller bit for fine work and it will operate at a far far lower temperature. If you don't have a soldering iron, they can be obtained from Tandy, Maplin or ACL, providers of the AIR Link parts kit.

You might even like to consider one of the small gas operated irons which offer excellent control over the temperature, have no trailing wires and can be picked up and put down easily on the working surface without worrying about the power lead dragging it onto the floor.

The principal of soldering is that the heat and solder are applied to a 'joint' at the time. There's a chemical called 'rosin' in the the solder which melts first. This is corrosive and will eat away much of the impurities coating the surface of the metals to be joined. Seconds later, the heat deactivates the rosin which leaves brown stains on the PCB joints. The idea is that the solder will coat the wire and the PCB metal pad evenly. Without too much or too little solder and without too much heat. Too much heat or for too long is the killer for soldering. This can damage components and lift the actual tracks on the PCB which effectively destroys the project. Be cautious and test how quickly solder melts on the tip of the iron.

After a few joints are made in quick sequence, you'll find that solder tends to build up on the tip of the iron. Wipe it clean on provided sponge which should be lightly moistened.

The basis for 'populating' a PCB with components is that you insert a few at a time. Bending the leads outwards to hold the components in while the PCB is turned upside down to make the solder joints. After the installed component's joints are made, the leads poking out of the joints are clipped off with small wire cutters. In this way the PCB shouldn't be cluttered with leads at any one time and it maximises the access of iron and solder to each of the joints. Spare some thought for the order in which the components are inserted and soldered.

Specialist tools like project clamps with crocodile clips or even mini project vices can make construction easier. Definitely worth a look if you'd like to go on with building electronic kits.

Finally, if you're very nervous about starting to solder on AIR Link for the first time, here's a handy tip to practice. Obtain any old piece of dead circuit board out of some non-working equipment. Get some desoldering braid (again Tandy, Maplin or ACL) which allows removal of components. This copper braid comes on a reel and is pushed onto the joint and heated up so that it soaks up the solder and removes every last drop. Remove the old component and you have some holes to practice with. Chop off a little of the lead of some of the components in the kit, insert into the holes and have a practice run. Good luck!



AIR Link compo

COMPO!

Now you've built AIR Link, your next task is to put it to good use with your Amiga. It's clear that there are a great deal of applications from the useful to bizarre. We're interested in what uses you come up with for AIR Link so CU Amiga and ACL is running a little competition. Send us details of your application for AIR Link which may be useful or novel. We'd also like pictures if possible. The top 3 entries will each feature in the magazine and receive a years free subscription to CU Amiga. So get cracking and put AIR Link to work!

Send your entries to; AIR Link compo, CU Amiga Magazine, 37-39 Millharbour, Isle of Dogs, London, E14 9TZ.

AIR Link software

The software suite for use with AIR Link is called InfraRexx. There are two main componants to InfraRexx, the InfraRexxEditor and the InfraRexxDaemon. The former allows you to edit a codeset that the software will understand. This can be created from scratch or it can be a modification of an existing codeset. To use the Codeset from then on, the InfraRexxDaemon commodity program runs silently in the background which receives and transmits under control of ARexx.

ARexx is the key here, there's not a lot of point even touching this software unless you have ARexx running. This is more normally accomplished by having "run <>nil: sys:System/RexxMast" in your s:user-startup script. Or RexxMast may simple be dragged to the WBStartup drawer. Don't worry if you can't programming in ARexx, it's not necessary to use the software fully. Here's a quick tutorial on learning a code with a Sony remote control. Load up the InfraRexxEditor. Select Load from the Project menu. Enter the Codesets directory and select the Sony codeset. Now the values for Bitrate and Modulation will be set and we'll have a bunch of codes listed under the Inrared Codes heading.

Press the New button and then click on the Unnamed item that will have appeared and press the Edit button. The InfraRed Code Editor will appear. Press the Learn button on the bottom right of this GUI. Now point your Sony remote control at AIR Link and press a button. You should find that InfraRexx has learnt the code now. You can test this by pointing AIR Link at the appliant the remote control was for and pressing the Send button on the code editor GUI. It should have exactly the same result as your remote control. If not, try learning the code again.



Icon : InfraRexxDaemon (Tool)

Blocks: 29
Bytes: 14,596
Stack: 4096
Last Changed: 22-Feb-96 23:20:42
Location: WhatsLeft:InfraRexx/InfraRexxDaemon
Comment:
Tool Types:
PUBSCREEN=<public screen name>>
<MONITOR=<YES|NO>>
DONOTWAIT
HARDWARE=4
FROM=WhatsLeft:InfraRexx/Codesets/test

Script
Archived
✓ Readable
✓ Writable
✓ Executable
✓ Deletable



Infrared Code Editor

Infrared Code Interfacing
Infrared Code Name: DAT 1
ARexx Transmit Command: DAT_1
ARexx Receive Command:

Transmit Bitrate
☑ Use Codeset Bitrate
1,667 bits per second

Infrared Code Data
☑ Data Locked
Infrared Bitstream: 1111010101010101010101010101101
Delay Between Codes: 44 bits
Code Repetition: 3 times



InfraRexx

CodeSet Description: Sony

Bitrate and Modulation
1,447 bits per second
19,200 Hertz

Monitor Frequency
100 times per second

Infrared Codes
Tape A Play
Tape A Play Reverse
Tape A Stop
Tape A Fast Forward
Tape A Rewind
Tape A AutoPlay

We've successfully completed the basic step of teaching InfraRexx a remote control code. The next step is to do something with it. When the InfraRexxDaemon is running, every time it picks up a signal matching this code, it will execute an ARexx command entered in the ARexx Receive Command box on the Code Editor GUI. The trick here is that it can be a direct ARexx command inclosed in quotes or it can be an ARexx script. For it to be a script it must just a single name. InfraRexx will then look for the script name plus the extension '.irx' in your rexx: path. 'testing' in the Receive Command box would make InfraRexx look for rexx:testing.irx.

On the other hand, we could put in something like 'address HIPPOPLAYER play'. The address part tells ARexx to send the next command to the ARexx port called HIPPOPLAYER which is the ARexx port for the Hippoplayer module player. The 'play' bit is a command supported by Hippoplayer which clearly starts playing a module. This simple method can make any remote control command send an InfraRed command to any ARexx capable application which is quite a lot. See the documentation on the applications you want to use for the specific ARexx commands they support.

The ARexx Transmit Command works differently, you can put anything you like in here. TV_ON would be a good example. Make it upper case for clarity since it's case sensitive. Now if we were to save this code set, run the InfraRexxDaemon on it and then type in the shell;

```
rx "address INFRAREXX <command>"
```

This is a highly important line as it can be activated from within any program such as ToolsDaemon, Tools Manager, Directory Opus and so on. Any button, function and so on can be made to activate an InfraRexx code which will be transmitted by AIR Link. The 'rx' bit tells ARexx that the bit enclosed in quotes will be executed by the ARexx interpretor. The address INFRAREXX tells ARexx to send the <command> to InfraRexx's ARexx port and the <command> is the same as what we've put in the ARexx Transmit Command box when we were editing the code.

The most important factor in running the InfraRexx software is that the InfraRexxDaemon must be told which codeset to work from. This is accomplished by the icon tooltypes of the InfraRexxDaemon itself. The FROM= line needs to point to the Codeset which we have defined previously. For example;

FROM=DH1:InfraRexx/Codesets/Sony. As usual, you gain access to the Icon tooltypes by clicking on the icon and selecting icon information from the Workbench menus.

The trick here is you'll often want to test your InfraRexxDaemon while you're working from the Code editor. This won't work as the Amiga's timing chip (CIA) will be tied up while the daemon is running. It is a commodity though, so you can click it again and a requestor will pop up. You should answer that you want to quit. Then you can make your changes via the InfraRexx code editor, save them and re-run the daemon. Phew!

There's a great deal we can do with InfraRexx and we've only touched the basics here. Next month we'll follow up with the finer points and some practicals of our own on what can be done. In the mean time, reading the InfraRexx documentation in full should set you on the right track. Enjoy! ■

Mat Bettinson - mat@mats.net

AIR Link credits

AIR Link is the result of collaboration between several parties to bring this exciting device to as many Amiga owners as possible. The original InfraRexx project was created by the Dutch geniuses Leon Woestenberg who created the superb software and Jeroen Steenblik who designed the hardware originally known as InfraJoy.

We took the hardware design to Adrian Jones of Assembly Contracts Ltd. Working closely with ACL, a new PCB was created specifically to fit available parts and a specially obtained box. Many thanks to Leon, Jeroen, Adrian and the other people at ACL for which this project would not have been possible. Thanks also must go to CU Amiga's publisher Andy McVittie who had the forsight to agree to covermounting the PCB. AIR Link has been an intensely rewarding experience to conceive and create, we hope you share in our enthusiasm.

AIR Link technical

This explanation may well be over your head if you have no knowledge of electronics. Don't worry about that, it's not necessary to build and use AIR Link effectively. It's just provided for those who want to know a little more about what it does.

The receiver

To receive the IR codes, we use a hybrid IR receiver from Siemens, the SFH506-36 series. 36 represents the modulation frequency it is most sensitive to. The ACL kit uses a 36KHz part which is in the middle of what most domestic units offer. It will be a little less sensitive to Sony remotes which use a frequency near 40KHz.

This IC is an integrated IR receiver with an amplifier, a filter, a demodulator and a TTL driver. As such it removes a lot of the electronics otherwise needed into a single small 3 legged package.

It produces clean digital data streams when it receives IR information and it is very insensitive to ambient light. The output of this IC is fed directly into the Amiga via the Joy port where it is analysed by the InfraRexx software. We also use the output to drive the green receive LED.

The transmitter

This is a bit more complicated. To get reasonable working distances without interference, it's necessary to modulate the binary information that is fed into the IR LEDs.

To achieve a greater working distance, this design uses a MOS (Metal-Oxide Semiconductor) transistor which is capable of switching large currents.

Now, a current limiting resistor is needed to protect your Amiga's +5V output. To make the most of the output signal, a capacitor is added to provide larger voltage peaks, therefore enhancing the LED's output.

The signal is modulated using two Schmitt-trigger NAND ports with a software adjustable RC circuit inbetween.

The software adjustability is achieved by using two other output lines of the Amiga joystick port to control two analog switches (integrated into the HEF4066 IC). These switches can both connect a parallel resistor to the RC circuitry, thus creating a total of 4 different resistor values in the RC circuit.

This, of course, does provide four different modulation frequencies, and considering the normal component accuracies this is enough to control most electronic brands. And there you have it.



Order Form

Name...

Address:...

....

....

....Postcode.......................................

Telephone ....

☐ I authorise you to debit my credit card account for the cost of the goods despatched.

Access/Mastercard/Visa/(delete as required)

Credit card number: ☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐

Expiry Date: ☐☐☐☐☐

Name on Credit card: ....

Signed: ....

Please make UK cheques, Eurocheques, Postal Orders payable to ACL Ltd. and made out in pounds sterling only. No foreign personal cheques.

Assembly Contracts Ltd supply the AIR Link kit of parts in a built and non-built form. They also stock soldering irons and some other accessories which are useful to AIR Link.

	UK post	Rest of World
☐ AIR Link kit of parts	£14.95	£15.85
☐ AIR Link fully built	£24.95	£25.55
☐ Antex 15W Soldering iron	£12.50	£13.00
☐ Low cost 15W Soldering iron	£7.49	N/A
☐ Infra Red mains light switch*	£25.75	£26.50
☐ Remote control extender**	£63.40	£64.10

Send this form and your payment to:
Department Amiga, Assembly
Contracts Ltd, Woodfield House,
Woodfield Road, Altrincham,
Cheshire, WA14 4AC.
Web: http://www.acl.co.uk/amiga/
Orders available online.
Phone: 0161-6135000 Fax: 0161-6135001

AIR LINK
AMIGA

*(This replaces a normal light switch fitting and allows the light to be switched on/off and dimmed via InfraRexx 240V, no fluorescent lights)
**(Two mains powered pyramids that receive and retransmit InfraRed via radio so that devices in separate rooms can be controlled. 240V mains)

SADENESS

Coming Soon from Sadeness Software, the ultimate Amiga CDROM games!

FOUNDATION

The Ultimate Amiga Strategy Wargame!

Due for release in November 1997. **Foundation** will set new standards for the Real-Time strategy war/conquest games! Featuring many unique features not seen in any game for any platform!

Combining the very best elements of **The Settlers 2, Warcraft 2, Command and Conquor, Megalomania** along with some totally original ideas and features - **Foundation** will set new standards for strategy games on all computers.

Brief Feature List:

- ECS, AGA and CyberGFX fullly supported.
- 1 player versus 1, 2 or 3 computer controlled players.
- over 800 frames rendered intro
- Full control over every friendly unit
- Random level generator for intinite levels!
- Custom made 24bit quality mission/menu screens.
- Advanced enemy Artificial intelligence.
- Realistic rendered objects such as trees, rocks etc.
- Serial and TCP/IP links planned
- 2 player Split-Screen mode.
- Over 50 meg of Sound and Graphics.
- Comes with a Map/Mission editor.
- Extensive full-colour on-line manual/help.
- Mug-Shots included from Amiga owners!
- Advanced Fire/Smoke/Shadow effects.
- High-Res graphics-absolutely amazing!

If you would like to be one of the very first owners of this massive new Amiga game, you can fill in the pre-order form below **(NOTE: No money will be debited until your order is sent!)**. This will ensure that your order is despatched on the very day of release!

Release Date: November 1997 • £29.95 inc p&p • http:/WWW.sadeness.demon.co.uk/foundation.html

SYSTEM REQUIREMENTS: Any Amiga - 2 Meg RAM minimum Double-speed CDROM. AGA and Graphics cards fully supported and enhanced

Incredibly detailed H-Res graphic

Stunning 24bit intro/menu screens!

Full battle and management control!

onESCAPEE

Due for release in October 1997. **onEscapee** will set new standards for Action/adventure games!

Combining the very best elements of classic games as **Prince of Persia, Another World** and **Flashback** along with some totally original ideas and features - **onEscapee** will set new standards for action/adventure games games on all computers (PC and Amiga versions under development).

Brief Feature list:

- AGA required and CyberGFX support planned.
- 5 minute long, atmospheric 9meg Intro!
- 100% multi-tasking system friendly.
- Incredible, atmospheric digital music score!
- Cave, City, Underwater and space levels + more!
- Control choice of Keyboard, Joystick or Joypad.
- A great variety of different enemies - with intelligence.
- 4 years in development by a large team!
- 100% pure assembly language
- Thousands of hand-drawn animation frames!
- Can be used on Double-scanned screens.
- Complex animations are custom-rendered!
- Logical puzzles
- Full use of AGA chipset - using 256 colours.
- Rippling water, sweeping light beams etc.
- Amazing film-quality cut-scenes!

If you would like to be one of the very first owners of this massive new Amiga game, you can fill in the pre-order from below **(NOTE: No money will be debited until your order is sent!)**. This will ensure that your order is despatched on the very day of release!

Release Date: October 1997 • £29.95 inc p&p • http:/www.sadeness.demon.co.uk/foundation.html

SYSTEM REQUIREMENTS: Any Amiga - 4 Meg RAM minimum. Double-speed CDROM or better. Graphics card support planned for the future.

Full 256 colour AGA graphics

600+ frames of character animation!

Full atmospheric digital music score!

IF YOU WOULD LIKE TO PLACE AN ORDER FOR EITHER GAME OR RECEIVE MORE INFO ABOUT THEM - PLEASE TICK THE CORRECT BOX, AND FILL-IN YOU DETAILS. Please send completed form (telephone/email us) to: Sadeness Software - 13 Russell Terrace - Mundesley • Norfolk • NR11 8LJ • UK Tel: (01263) 72

Place a Pre-Order for **FOUNDATION** ☐ Recive further info about **FOUNDATION** ☐ Place a Pre-Order for **onEscapee** ☐ Receive further info about **onEscape**

Please fill in your details in BLOCK CAPITALS. Thanks.

Name ______ Address ______

______ Postcode ______ Country ______

Credit Card Number ______ Card Expiry Date ______ Issue Number (Switch only) ______

Telephone Number ______ Email ______

Your Machines Specs ______

Screen Scene

No previews… things slowing up? Hardly. We had so much in this month we could have almost filled the mag. Not enough space! What we lose on quantity we make up for in quality with two top new titles, some great re-releases and more TFX.

Reviews

37 Sensi Golf
37 Blitz Tennis
38 Street Racer
40 Trapped 2
42 Dune 2

Tips & Guides

43 TFX Tips
46 Tips Central
46 Capital Punishment



Trapped 2 40



Sensi Golf 37



Blitz Tennis 37



Street Racer 38



TFX Tips 43

TEL: 01263 722169
MOBILE: 0370 766679
SAdENESS Software, 13 Russell Terrace, Mundesley, Norfolk, NR11 8LJ
email: rich@sadeness.demon.co.uk
URL: www.sadeness.demon.co.uk

Latest Games

Capital Punishment v1.1 (HD+AGA) ..... 95% Amiga Action £24.95
CP has been rated as the best ever Amiga game. Now includes patch disk which corrects any previous problems.

Big Red Adventure (CDROM) £19.95
A superb conversion from the classic PC title. Point and click adventure as a master criminal mind in a master plan to make an amazing robbery!.

Chaos Engine 2 ..... £24.95
Lifting the characters from the award winning Chaos Engine, you enter a new style of play where stealth and cunning must be combined with reaction speed and skilled shooting.

MYST (CDROM) £29.95
From the producers that brought you Capital Punishment, have now converted the biggest selling PC title of all time to the Amiga. Release date is imminent, pre-orders are being taken, reserve your copy NOW!

Nemac IV: Directors Cut (CDROM) ..... 93% Amiga Format £24.95
Superb doom done adventure

Worms: Directors Cut (AGA) £19.95
Andy Davidson, the mad creator of Worms, brings you this superb new version of worms, with loads of new features including weapons, 256 colour landscapes, graffiti mode and loads more.

Championship Manager 2 ..... £29.95
At last , Championship Manager 2 has finally been relesed. The superb sequel to the Amiga's finest football management sim. Includes all the greatest players of today, all the biggest English clubs, big money transfers etc.

CD Stock Clearance

AGA Toolkit 97 (Werd Science)	£7.95
Adult Sensation 2	£14.95
Adult Sensation 4	£24.95
Amiga Emulator CD	£15.95
Amiga 7, 10, 12, 13, 18 or 19	£10.00
Aminet Box Set 2	£19.95
Amine Babes	£17.95
Arcade Classics +	£12.95
Assassins Games 3	£17.95
Emulators Unlimited	£14.95
Epic Encyclopedia	£23.95
Epic Paranormal	£14.95
Euro CD Vol 1	£11.50
Euro CD Vol 2	£11.50
Flash ROM	£24.95
GIF Sensation (2CD)	£14.95
Geek Gadgets	£14.95
Horror Sensation	£14.95
Imagine PD3D	£14.95
In-To-The-Net	£17.95
Majic Workbench Enhancer 2	£13.95
Mick Davis Cartoon Clipart	£14.95
Movie maker SGFX Vol 1	£15.95
Multimedia Backdrops	£14.95
Net Connect	£45.95
Official OctaMED 6	£14.95
PCX	£39.95
Sound FX Sensation	£12.95
Sounds Terrific Vol 2	£17.95
The Speccy 97 + C64	£14.95
World of Clipart plus	£14.95

New Releases

Fusion £49.95
Available NOW! The very latest Macintosh emulator has arrived with the release of Fusion. Works with all amigas that have 020 or better. Supports Emplant hardware if present, System 7.1 to 7.6, Virtual Memory with 7.5+, Picasso 96 & CybergraphX and more. Minimum requirements, 020, 4meg, 20meg HD space, System 7.1.0, High Density floppy drive and 256k Mac ROM.

Aminet 20 ..... £12.50
Dated August 97 includes all the latest utilities, demos, games, pictures, mods etc.

Aminet Box Set 5 ..... £32.95
Latest Aminet Collection, contains the last 4 in the series. Also included is the full version o
Octamed Soundstudio

Geek Gadgets 2 ..... £17.95
For programmers, includes developer version of p.OS

p.OS Pre-Release £19.95
Available early August. A really complete operating system at a reduced introductory price. After purchasing this CDROM, you will be given the opportunity to upgrade at a cheap price to the final version.

Sadeness Software CDROMs

AGA Experience 3
90% Amiga Format
90% CU Amiga
SPECIAL OFFER £15.95 including p&p

WOTW: Exposed
SYSTEM REQUIREMENTS: Amiga, AGA, 4meg
Double CD ROM
Adults ONLY! 18
SPECIAL OFFER £25.95 including p&p

Hidden Truth
90% Amiga Format
90% CU Amiga
90% AComputing
"As a reference tool it's unbelievable" "far more entertaining than the encyclopedia Brittanica"
- Allen Encounters
SYSTEM REQUIREMENTS: 4MB+ AGA
SPECIAL OFFER £25.95 including p&p

SELECTAFONT

Pic`n`Mix GRAPHICS

ONE WAY

Why be tied to taking "Pot Luck" when buying ClipArt? Now YOU can select your own preferences from the comfort of your own home. Choose from over 3000 images in over 40 Categories. Give yourself a break and TRY BEFORE YOU BUY! Available in Formats suitable for all Amiga Programs (Hi-Res Bitmapped or Scaleable) All images are **8 to 256 Colours**.... suitable for both **Colour and Mono Printers**. All clips are artist drawn.......no scanned or traced images here!

POW!

HAPPY BIRTHDAY

INK JET REFILLS

REFILLS (Microfiltered Non-Clog Formula) all Colours from 87p per refill
COMPATIBLE CARTRIDGES As good as original...but cheaper! from £4.99

We have been supplying our Customers with Refill Inks for many years, and most of our sales are re-orders. We demonstrate the quality of our Inks by providing a FULL COLOUR PRINTOUT with every Information Pack. Who else does this?

Pic`n`Mix FONTS

BEEVOASE CHILLI
CHINESE [illegible] HEADHUNTER STEEL
INDIANAJ KEYBOARD STAR
BLOCK WHARMBY
WOBBLE STARS
ZORRO CARPE
SWINGE POSTCY
Tintoret QUBIST
Open Ho RANSOME
PEACE OREGONWET
SALTER Miami
ORIENTAL SHANGHAI SHRAPNEL
Medusa STENCIL STRETCH
TOYBLOCK WEDGIE WASHBOOK!
POWERLINER OLDEWORLDE WHAT A RELIEF

Unlike some of the cheap and cheerful Font CDs and Disks doing the rounds, **our Fonts WORK!** Select from over 4000 Fonts in both COMPUGRAPHIC and ADOBE formats and leave the rest up to us!

For Bulk Buyers we offer some very special deals with Fonts from **7p each**

We have been in business since 1991 and pioneered the Pic n Mix concept. Our service is unique with a **TECHNICAL HELPLINE** for all of our valued Customers

For your FREE 46 Page Information Pack, either Write, Phone, or Fax us.

SELECTAFONT (Dept CU)
84 Thorpe Road, Hawkwell, Nr Hockley, Essex. SS5 4JT

FAX: 01702 200062 VISA MasterCard PHONE: 01702 202835

Sensible Golf

■ Price: £9.99 ■ Publisher: Guildhall Leisure ✆ 01302 890000

Odd one, this. Hardly surprising given the track record of Sensible Software, famed for their use of tiny sprites and deranged humour. Sensible Golf eschews the standards of golf games to make a title which clearly prioritises casual amusement over sports simulation.

The idea of Sensi Golf should be immediately familiar to those who've ever played a computer golf game. You pick your club, aim your shot and hit the fire button. A bar moves along the curved path of a graphical representation of a swing – a kind of power meter – and by choosing when to hit the button again you chose how hard the ball is hit. The bar then moves down again and enters a red zone. The closer to the middle of this zone the bar is when you hit the button for the third time, the straighter the ball will fly.

Hit the button when the bar is to the left or right of the red zone and you get a certain amount of slice or hook. Go too far from the red zone and your swing simply fails to connect and you swing your club vainly like an idiot, something you are likely to do continuously for the first few minutes. The red zone varies in length (and therefore the easiness of the shot) depending on the lie of the ball and the type of club you have.



Pretty similar to every other golf game at this stage, but beyond here it starts to get odd. Firstly, the display is from overhead, with Sensible Soccer style sprites instead of the usual first person perspective. Then there are the messages you get when you make the whole Monster Greenie, Hanky Tastic and Flobalobadoberous spring to mind. Then there are the greens. From Tarpon Springs to Ladbroke grove, Sensible have thrown realism out the window with a bunch of courses clearly designed for laughs. There are putting greens in the middle of lakes and holes consisting of small patches of grass in a desert.

▶ It's like Cannon Fodder in peaceteam, or Sensi Soccer the day after the big match. Sensi Golf draws on the simplicity of Gameboy Golf and adds that unique Sensi humour. Fore!



With up to 72 players, cheesy samples, balls that pop out of holes and so on this is a game with an emphasis on casual fun. There are some solid golf game elements (the swing bar is one of the best I've seen), but this is the kind of game best played in a frame of mind that makes you laugh not curse when you fail to notice the computer has selected a 1 Iron for you 2 yards from the hole. If you're looking for an after the pub game this is a rather good option. ■

Andrew Korn

Graphics 75% Sound 80% Lastability 83% Playability 91%

- ■ Workbench version.......Any
- ■ Number of disks.......2
- ■ RAM.......1Mb
- ■ Hard disk installable.......No

87%

Blitz Tennis

■ Price: £9.99 ■ Publisher: Guildhall Leisure ✆ 01302 890000

I've always wanted a good tennis game. Maybe it's just a morbid curiosity, a desire to see if anyone would actually ever manage to produce a decent one. The very first computer game, Pong, was a tennis game, while Matchpoint on the Spectrum introduced the notion of attempting to look like actual tennis. International 3D tennis introduced true 3D courts and sampled commentary. Today there are the the cartoony Smash Courts and the ultra realistic Actual Tennis on other platforms. All have good and bad points, so how does Blitz Tennis fare?

Blitz Tennis is blessed with a wealth of options. You can play singles or doubles with all variations of computer or human players. You can choose grass, clay or indoor courts and you can play tours, tournaments and friendlies. There are 100 players to choose from, based on the top 100 ATP rankings from a couple of years ago. Each player is rated in various skills like stamina, speed, serve etc. Sampras, the number one ranked player has 100% in all stats, which seems a little artificial, but this is a good feature which gives all the players strengths and weaknesses which make them unique. All that's missing is Sampras standing around with his tongue hanging out. Apart from the omission of any female players (probably laziness on behalf of the graphic artists), there's pretty much every option you would want. Now onto the game itself...

Graphically Blitz Tennis is dire. The sprites look like they all have rickets or similar leg affecting diseases, and the backgrounds are messily drawn. Animation is limited and crude, poor compared to tennis games of five years ago let alone the very nice looking screenshots we've seen for the upcoming Quiet Please Tennis. Sonically it's even worse with abysmal samples – are these tennis balls filled with glass or something?

◀ You may well hang your head in shame. Sadly the digitised cut scenes say it all.



Over simple controls limit the depth of play, adopting a 'hit the button when you're near the ball to return it' system. You can lend aftertouch to the ball of course, but you don't really get the feeling that there are a wealth of options open to you. All in all this seems barely worthy of a licenceware release. Ah well, my search continues. ■

Andrew Korn

Graphics 45% Sound 30% Lastability 50% Playability 66%

- ■ Workbench version.......Any
- ■ Number of disks.......2
- ■ RAM.......1Mb
- ■ Hard disk installable.......No

49%

Street Racer

■ Price: £14.99 ■ Publisher: Guildhal Leisure ■ Supplier: Epic Marketing ✆ 01793 514188

Cross Street Fighter with Bump & Burn, and you'll have some idea of the chaos that goes off in this long overdue comedy race 'em up.



▶ Right: Here we have the basic single player race option, but that's only the start of it. Anyone for motorised combat football?

TIME 02:18:50
LAP 2
POS 4

TIME 00:12:34
LAP 1
POS 4
TURBO 0

Here's a rarity these days, an Amiga version of a hit game. Street Racer progressed from its SNES origin to be something of a hit on the Playstation and PC a little while back, and now it is being released for our own little slice of gaming heaven by Guildhall Leisure on floppy and, thanks to their partnership with Epic Marketing, also on CD. We are told that the CD version will have better music, which wouldn't hurt, and the full intro sequence from the Playstation version. This version of the game, programmed by Vivid Image for French Softco Ubisoft, had been sitting on their shelves for a few months until Guildhall got wind of it and snapped it up. Something of a cross between a racer and a beat 'em up, Street Racer is a game firmly aimed at laughs.

The obvious inspiration for this title is Mario Karts, although Amiga users are likely to be more familiar with Siltunna's brilliant Mario Klone XTR. Comparisons are more in gameplay than technology, with Street Racer opting for a simpler, more 2D graphics system. The tracks don't have the same pseudo 3D complexity of XTR, adopting a game engine which is more akin to the traditional Pole Position layered track. The result is a compromise, the tracks significantly simpler, but the game moves that much faster. Without all the heavy duty course rendering to do, Street Racer manages to be very nippy indeed on an unexpanded A1200. There is added value in the wealth of options and extras that Street Racer crams in, but does its playability live up to the superb XTR?

xhead: Initially impressive?

When you fire this up and get a race under way, you are likely to find that the initially impressive graphics just don't do as much as XTR. Being sprite based, Street Racer's cars are more detailed, and the artwork is very well done, but as the game progresses, you will find that the payoff is that the tracks are a lot less directly engaging than Siltunna's effort. Running XTR on a vanilla A1200 means dithered 2 by 2 pixel mode, but give it a little extra CPU horsepower and it looks gorgeous. Street Racer's parallaxed, full coloured backgrounds look very nice, but the tracks are a lot simpler in comparison. The camera is locked into a track following viewpoint, and distancing isn't great so you tend to veer off the road a lot. This isn't particularly important because as long as you are willing to hit the jump button every time a roadside object veers into view, you can happily drive around on the grassy verge. There are no crossovers, jumps or shortcuts, so race around the track heedlessly and you'll rapidly find the game gets rather shallow. So is that it? Written off in 450 words? Luckily not.

Burning rubber isn't really what Street Racer is about. In this game getting ahead of the pack blasting down the course as if you're trying to break the sound barrier in a jet powered car means missing the fun. Where you really want to be is right there in the pack, where you can reach out the side of your car and give your opponents a big fat slap in the face. The tracks are there to

▼ Below: Take your pick from a range of alter egos with suitably outlandish cars to match, including the obligatory Penelope Pitstop rip-off.





▲If you don't mind sharing the screen, you can have up to four players racing at once!

keep the action going. If you pull to far ahead, there is a very fast reverse gear to get you back ito the action. Even if you don't bother steering, you are held close to the track edges, and will keep doing the circuit regardless. As you tussle your way to the head of the pack, expect to be fighting for place quite literally. A quick tap on the joystick and your driver will reach out an arm and, if timed correctly, send an opponent spinning sideways. Another tap allows you to jump over your rivals, and if you get the right powerups you can use your car's special abilities. Depending on which driver you have picked, this might result in blades coming out from the wheels, powerful bullhorns blasting other cars out of your way, storms of lightning, or in one case your car sprouting a set of wings and soaring over the heads of the other racers like a World War 1 tri-plane.

There are, as you would expect, all the normal options. Cups, head to heads, practice races and championships. There are also a couple of rather unusual options on the list which gives Street Racer and entirely different sort of challenge. Look down the list and you will see that as well as straightforward racing you can pick rumble and soccer modes. These are quite unlike anything XTR has to offer, and add a lot of extra options for the easily bored.

xhead: Ready to rumble?

Rumble mode is Street Racer's answer to Mario Kart's combat mode, and true to form, it is a lot more in your face. In Mario Karts you spend a lot of time thinking tactically. The arenas are full of twists and turns and place to hide, and the game is all about keeping a close eye on what weapons you and your opponent have managed to pick up. Here the arena is a very small circular course. You race around the course, choosing an inner lane to go slowly or moving to the outside if you want to go fast. With everyone packed into a relatively small space, the action is pretty intense as you try to cut inside the other cars and slap them right off the track. Getting the tactics right is tricky, as overtaking cars tends to mean going on the outside of them, but this puts you dangerously close to the edge and vulnerable to their attacks.



Soccer mode is perhaps even more manic. A direct head to head, you drive your car around a half football pitch, each car tussling for posession and position in an attempt to force the ball into the goal. Alas it doesn't work as well as it might, but it is a pretty reasonable distraction for keeping a few drunken friends from smashing up your furniture.

All in all Street Racer is a game for people who find XTR too serious. Some people, especially those with an Amiga powerful enough to get the best out of XTR, are going to find the simplicity of the tracks poor compared to the well designed 3D tracks of XTR. Coupled with the facility to add in extra tracks, XTR is a much better out and out racer. Chuck in Street Racer's extra options and lunatic gameplay and what you have is something which is less demanding but a lot of simple out and out demented fun. It is playable, and has a lot of variety to keep it going. With what pretty much amounts to three games in one and excellent multi player arcade action, Street Racer is a more than worthy waste of time for any bunch of computer game addicted.

Andrew Korn

STREET RACER

Workbench version	3.0	Graphics	87%
Number of disks	1/CD	Sound	75%
RAM	2Mb	Lastability	87%
Hard disk installable	No	Playability	89%

OVERALL

Fun and varied racer best played with a few friends.

87%

Civilization collapses!

Evil monkeys trained by a Sid Meier hating cult appear to have sabotaged some of last month's games reviews. Civilisation`s overall score of 88% did not tally with the comment "one of the best games ever" because the score was modified by persons unknown. Everyone involved has denied responsibility for the score and the removal of the Superstar award, but the truth will out and here is the real scorebox and award. Our apologies to all involved. There were also some bizarre aberrations on the phone numbers and prices front. Gunship 2000 and Rairoad Tycoon would have scored even higher if they really were under £8, but they are actually £14.99. They are also published by Guildhall Leisure, not Epic, although Epic can sell them to you. Finally the phone numbr on the Civ review was mysteriously not Epic's, which was printed correctly on the next page. If I find those monkeys...

AMIGA SUPERSTAR

CIVILIZATION CD-ROM

Workbench version	Any	Graphics	75%
Number of disks	CD	Sound	n/a%
RAM	1Mb	Lastability	96%
Hard disk installable	Yes	Playability	92%

OVERALL

One of the best games ever produced

94%

Trapped 2

■ Price: £19.95 plus £1 p&p ■ Supplier: Weird Science ✆ 0116 246 3800

The first Trapped stunned everyone with its 3D effects but the gameplay just didn't quite work. Trapped 2 is even more graphically impressive – but has the game got better too?

AMIGA SUPERSTAR





▶ Right: The most impressive 3D engine the Amiga has seen features real polygon monsters (that's a bee on the left of the screen), lighting effects and quite impressive frame update.

Before I go any further, let me make a quick point about the graphic engine. It's incredible. It's not quite up to the standard of id's Quake engine or Interplay's Descent 2 engine, but then you'll tend to see these running on dedicated graphics hardware and high powered CPUs. The Trapped 2 engine can do an awful lot of what these engines do, and what's more it will run rather nicely on even a medium powered Amiga.

The concept behind Trapped 2 is an interesting one. New Generation software have taken a formula which was getting rather stale and tried to give it an entirely new challenge. The world is full of 'Doom clones', first person shoot 'em ups, and frankly it is begining to get a little boring. Trapped grafted the Doom concept onto an RPG to make something with a bit more depth. The problem with Trapped 1 was that the impressive game engine just wasn't matched by the game play.

There wasn't enough of a depth of challenge to the game, with too few puzzles and fights in too many corridors. Fine for showing off the clever lens flare techniques but not good for long term appeal. The monsters really looked like they had been tacked on as an afterthought: flat and badly drawn sprites which seems to have no spirit for the fight. Anyone who has looked at the demo of Trapped 2 on the Aminet and on our cover CD a few months ago will know that Trapped 2 has been a real step up graphically, but what is important for a game rather than a demo is whether the gameplay aspects have improved as well. Fortunately they have.

The game is set in a fantasy realm of the type that keeps the trilogy merchants in beer and peanuts. You are, as you might expect, on a quest.

The story explains that "about two generations ago" your grandfather beat the demon Tarnak by locating the wheel of Talmar. Unfortunately the Demon escaped, killed lots of people and scared everyone away from the town of Kaldrion. You have to get into the place of Kaldrion and kick this demon back to hell, but you'll need to locate his eyes before you can get into the palace. I'd have thought he would keep his eyes inside his head, but some people have funny tastes. If the story sounds painful, be assured that English translation is worth the read. Fortunately all you have to know to play the game is that you want to get to this palace place to kill this monster and you'll need to find these eye things on the way.

Making your way around, you will find yourself coming across nasties rather more frequently than you did in Trapped 2. You can fight them with an assortment of weaponry or with some of your magic. People expecting combat to be like the average first person perspective shoot 'em up will be a little disappointed, as Trapped follows a more RPG approach. Each weapon has a different amount of power, but also a different speed. You won't get an instant response from any of them, a limitation to your fighting ability representing both the weight of the weapon and the level of combat skill your character has achieved.

This concept did not work well in

Casting runes

The Magic system in Trapped 2 works very nicely. It is very much along the lines of those in RPGs, but the transfer to a Doom type game comes over very well. You start of with a few spells in your spell book, and will learn more as your journey progresses. Once you know the recipe for a spell, you need only select the appropriate runes to cast it from the spellbook screen, and then when you return to play you need only hit tab to cast it. As well as the old favourites such as healing and fireballs, there are a few real oddities such as astral projection and levitation which work very nicely in this environment.



▲ There's a range of options available to get the game running as fast as possible. This shot shows the same point in the game at full screen full resolution (left) and reduced screen size with chunky pixels (right).

The game engine.

The first thing you will notice about T2 is that the game engine features a lot of things you will not have seen an Amiga do before. Complex lighting effects were a feature of Trapped one, although they are improved here. More revolutionary is the mip-mapping. This technique is designed to stop texture pixels going all blocky when you approach a wall, something which you would normally expect to see out of a Nintendo 64 or a Voodoo 3DFX. Next Generation have implemented a clever system of pre-rendered mip-mapping which makes up to 24 Mb of texture to keep the blocky pixels away. Add to that texturing and even blurring and you have a pretty sophisticated texture mapping engine. Nutters!

The impressive range of options allows this game to run on anything from an '020 with 1Mb chip, 4 fast and OCS up to a nice meaty Picasso IV and '060/66. Full screen mip-mapped play really calls for an '040 minimum, but drop the size down a little and it is fine on an '030 and AGA. If you must have the lot and want it to run on your '030/50 you will find it playable even if you do not have a graphics card, though rather jerky. An '060 with AGA nips along at a very pleasant pace, not dropping below about 10 fps. A graphics card helps things fly, but by keeping the resolution down to 320 by 256 pixels, the data throughput problem with AGA isn't really a problem.

Trapped 1, but for the sequel they have got it right, making combat more of a challenge and less of a bloodbath than similar games. Of course if you get bored of hacking things to death with your sword, you can always cast a spell at them, a ball of fire, perhaps, or an ice storm. Blasting glowing balls down the corridor at your foes, watching walls glow as the fireball passes and seeing your oncoming enemy rocked back by the blast is great fun, but you'll find yourself running out of magical energy rather quickly if you do this too much.

As you explore the mazes, you will find a lot of scrolls and potions. Many of the scrolls give you clues to your quest, while others give you the recipies for spells – for more on these see the boxout.

The potions come in four types, blue for health, red to renew armour, green for strength and yellow for a five second speedup. If life wasn't hard enough, Trapped 2 is littered with puzzles. There are switches a plenty in the game, as you would expect from any doomy sort of game, but there is a lot more ingenuity and invention than you normally find. Expect to come across strange mechanisms, whirling blades, and traps a plenty as you make your way through the levels. Remember, this is not a game for mindless slashing, this game requires a lot of thought.

The presentation of the game is nicely polished. There are very nice FMV animation sequences, the game starting with a beautifully rendered wander around the inside of some kind of castle chamber decorated with demonic furnishings and coffins. The music is effectively atmospheric if not stunning and the options screens seem to leave no stone unturned. It's a pity the cover art of the CD is so poor in comparison – a frame from the intro sequence would have done a much better job. The most obvious omission on the presentation side is the lack of a manual. You can get the key codes by hitting 'h' during play for the help keys, but there isn't any sort of printed manual, something I think professional games ought to have. There is even rather strangely no readme icon to fire up some instructions, although there are some text files on the disc in a docs drawer. I guess most people who buy this game will be reasonably competent with their Amigas, and will no doubt be capable of finding these, but a click to read icon in the root of the disc would have been extremely easy for the author to implement and would have added extra professionalism. I guess this is the result of the demo scene background of the coders, something also displayed in the presence of the benchmark utility which tells you how good your machine is at running Trapped 2.

◀ Left: Some of the enemies are really quite good, although unfortunately the combat sequences lack excitement.

All in all it sounds pretty good so far, huh? Well there are a few down points that have to be made, and on the whole they are to do with collision detection. Everything in Trapped 2 is proper 3D. The monsters are, the furniture is, even you are. Making this kind of 3D environment totally convincing means a lot of work in getting object position correct in three dimensional space. You will occasionally find that you get stuck going around some projection that looks as if it is a little distance from you, and objects have a tendency to pass through each other in a slightly ugly way. The most noticeable aspect of this is when you come face to face with one of those 3D monsters.

Combat takes place in a position strangely deep into your field of view. When an enemy lunges forwards, it is usually quite unclear whether they are flailing in your general direction or actually hitting you. Graphically this isn't actually an easy problem to solve, but I feel making the positions from which monsters can land a blow on you closer to the 'lens' would have been a significant improvement. Your own weaponry is more visible in effect, often causing small spurts of blood, but even here it's often unclear if you're close enough to hit the monsters or you need to be closer.

Balancing positive and negative points is easy. The combination of a stunning doom type engine and a role playing game which works, is a winner. It isn't perfect, but nothing is. It is one of the most original games to come out of an overpopulated genre on any computer, and shows that while there's coders squeezing this kind of performance out of the Amiga, there's life in it yet. ■

Andrew Korn

TRAPPED 2

- Workbench version......—
- Number of disks...........CD
- RAM.....1Mb chip, 4Mb fast
- Hard disk installable ...n/a

Graphics	95%
Sound	82%
Lastability	88%
Playability	91%

OVERALL

Sophisticated graphics… plus a game! Best Amiga game in ages. **92%**

Dune 2

■ Price: £14.99 ■ Publisher: Guildhall Leisure ✆ 01302 890000

Another re-release from the Guildhall stable. This time we have the father of real-time strategy wargaming.



▲ From this screen choose your next building project. As the game progresses more and more facilities become available.

The word classic is overused in game reviewing. Flick through any games magazine and you'll get the impression that classics come along several times a month. Five years on from its original release, this budget release from Guildhall shows that like Civilization reviewed last month, Dune 2 has every right to the epithet.

To deserve classic billing a game should be revolutionary, lasting and immensely playable, all qualities Dune 2 has in abundance. It is telling that Westwood have become one of the dominant forces in modern gaming with titles like Command & Conquer and C&C: Red Alert which are clearly updates of this title. The roots of the genre may be in games like Civ, but, Dune 2 was the first true real-time strategy game and gives away little to the state of the art.

Written for an A500, you won't see state of the art graphics in Dune 2. The palette is noticeably limited and the graphics simplistic compared to more modern variants, but the gameplay, tactics and involvement are there. The arenas are a bit small, and the range of buildings and weaponry smaller than is standard today, but there is enough depth to keep you coming back for more.

Desert planet

Based on Dave Lynch's 1984 film version of Frank Herbert's Sci-Fi novel Dune, Dune 2 has a richly detailed background. You take the role of military commander of one of three noble houses vying for control of the desert planet Arrakis, also known as Dune. The importance of this planet stems from the spice Melange, a substance of immense value found only on this world. You must utilise your resources as efficiently as possible to mine this spice and take control of the planet.

Depending on which of the noble houses you choose to join, you will have certain unique technological innovations available to you. The Atreides, for instance, get to use powerful sonic disruptor cannons, while the deranged Harkonnen have access to heavy infantry units and ultra destructive "death hand" missiles and the Ordos, masters of subterfuge, have specialist sabotage units.

Whichever house you choose, the basic principle is the same. Moving across the planet sector by sector you have to bring the entirety of Dune under your control. In each sector you start with a factory and a small number of military vehicles. Building on the stony areas of the play field, you can build up your settlement by constructing a range of facilities from defensive turrets to weapons factories and spaceports. The first thing to do is to build yourself a spice refinery and send your spice harvester into the deep desert to collect spice, your source of income for further building projects.

Worm alert!

The two main threats to your mining operations are the giant spice worms: who have a tendency to swallow any passing vehicles, and either of the opposing families: who have bases and are mining the spice themselves. When you confront your opponents, hell breaks lose. You'll issue orders to your armies to attack the opposing base, stop their harvesters getting to those valuable spice deposits before you and defend your own base from attack.

You also have to make sure your own spice harvesting operation runs smoothly and your base is kept in a good state of repair. You will have to keep your factories churning out tanks and aircraft, and if you have a spaceport you can keep your eyes on the interplanetary arms market to look for any units you can pick up at bargain prices. To make things even more difficult, if the galactic emperor thinks that your faction is getting too powerful, you can expect some of his crack Sardaukar troops to be airlifted in and start attacking your base.

As you progress, challenges get tougher and the technology available increases, keeping your interest right to the end. Better graphics would be nice, and the limit to the number of units available at once becomes a little frustrating at later stages, but these are minor points.

With the success of C&C on the Playstation and PC – not to mention upcoming Amiga titles such as Maim and Mangle from World Foundry and Forgotten Forever from Charm Design – this genres time has come and Guildhall's timely budget release reminds us that we've a good example of it on the Amiga (and should be in every Amiga gamer's collection). If you don't have it already, go buy this undoubted classic. ■

Andrew Korn





DUNE 2

■ Workbench version	Any	Graphics	80%
■ Number of disks	5	Sound	85%
■ RAM	1Mb	Lastability	95%
■ Hard disk installable	Yes	Playability	94%

OVERALL

Absorbing and challenging. An outstanding budget release.

92%

TFX Players Guide

Last month's awsome cover disk game gets the full tips treatment, complete with a guide to all the weapons and those mysterious cockpit displays. Watch out for more next month.

Attacking ground based targets

You have two basic techniques to learn for ground based attacks: laser targetting and HUD targetting devices. The GBU bombs use a laser targetter which should be activated with the 'z' key. Others use a crosshair which appears in your head up display.

The laser targetter: once this is activated, you can zoom in and out with the '<' and '>' keys. Press the cursor keys to move the crosshair around, and press the 'z' key when the target is in your sight. You know when you are targetting succesfully when the 't' above the target crosshair stops flashing and the 'l' for locked starts flashing. Hit 'x' to cancel a lock and F1 to return to a cockpit view. Your laser guided weapon is now targetted.

Mavericks: line up the target so it appears in the crosshairs. Press space to lock onto the target. You should see a target designator appear. Now press space again to launch.

MK82: this is a freefall bomb, so you have to drop it at the right time and speed. A CCIP (Continuous Computerised Impact Point) line appears on your head up display to predict the line the bomb will take when launched. A small circle at the end of the line shows the predicted impact point indicating that you are at an appropriate angle to drop the bomb. Wait until the circle crosses your target and let loose.





The main panels



There are three main panels: the indicator panel, the main console and the master threat panel.

Indicator Panel:

Grey: System inactive but functional.
Green: System active and functional.
Yellow: System has sustained slight damage.
Red: System totally rooted.

Main console:

1: Master Warning Light: Indicates damage to an oboard function.
2: Master Caution Light: Indicates faults or problems which can be fixed in flight
3: Fire Light: Shows that one or both of the engines are on fire. Time to eject!
4: Internal Messages: Status information from the onboard computer.
5: External Messages: Communications from AWACs, control towers etc.

Master threat panel



1: Lock: Lights when an enemy has a lock on you.
2: Launch: Missile has been launched within 30 miles for air to air or 50 miles for air to ground.
3: IR: Indicates IR missile homing on you, release flares.
4: RADAR: Indicates a radar guided missile is heading towards you, release chaff.
5: Threat light: Indicates unidentified aircraft on radar.

Using autopilot

There are actually four different autopilot modes. Just above the 24 hour clock at the far left hand side of the cockpit you will notice a display with a single number in it. Pressing the number keys 7,8,9 and 0 allows you to toggle this number from 1 to 4, selecting the type of autopilot that engages when you hit the 'a' key. These are

1. Waypoint. Directs your aircraft to the next waypoint defined in the mission brief.
2. Heading. Maintains the required heading, altitude and speed – adjusted with the cursor keys.
3. Tracking. Allows your craft to follow another craft on the radar.
4. Auto Throttle. Leaves steering and stick movement in your hands but controls the throttle automatically to keep your speed stable.



The weapons

Here's a reference guide to all the missiles and bombs that are available in the game. Some can only be used with certain planes.

AIR TO AIR WEAPONRY

AIM 9S

Range 16Km Speed Mach 2



The famous 'Sidewinder' is the standard short to medium range weapon of the USAF. It is infra-red guided.

ASRAAM

Range 15Km Speed Mach 3

A close combat missile which can lock on to a target from any angle.

AMRAAM

Range 48Km Speed Mach 4

A Beyond Visual Range radar guided missile, well suited for use with the forward looking radar.

AAAM

Range 200Km Speed Mach 6

A long range missile with active radar homing.

AA-ARM

Range 200Km Speed Mach 5

An active radar fire and forget missile. Rides an enemies radar beam.

AIR TO GROUND WEAPONRY

MK82

Unguided. 500lb yield.

GBU10 - GBU 24



The 'Paveway' series of laser guided bombs with various amounts of ordinance.

GBU BLU 109

A varient of the GBU24 which has a high penetration head for the harder of targets.

CBU 55

A laser guided fuel-air explosive.

JP233 / CMB18



Heavy runway denial weapon. Needs to be dropped from low altitude.

CSW

Cruise missile variant of above for long range targetting. Range 20Km.

Durandal

Runway denial bomb which can easily penetrate 4m of concrete before exploding.

Maverick

Television guided missile with a 40Km range.

AGM 109

Computer guided multiple bomblet airfield attack weapon. 300Km range.

AGM 88



'Beam rider' missile for destroying radar installation. Can be fired blind. Range 18Km.

AGM122a

Smaller but faster version of the above. 8 Km Range

AGM84



'Harpoon': a surface skimming anti ship missile. 92 Km range.



Running TFX on '040 or '060

Some people have had problems getting TFX to run properly on these more sophisticated processors. The '040 version should in theory work on these. In practise it works on some '040s and no '060s. The '040 was rare when the game was written, and we suspect that version was never properly debugged. People with these processors should try the FPU version if they are having some trouble.

The instruction set that the FPU version was written for is the 6888x FPU co-processor for '020 and '030 processors. As some of the commands in this set were dropped or altered for the internal FPUs in '040 and '060s, you may find that this version does not operate too brilliantly. In this case you will have to use a patch for the code to make it run more efficiently on your machine.

The two best solutions we have come across are:

1. Install MCP: You will find the latest version on this month's CUCD in the Magazine drawer. Go to the MCPPrefs program and select the processor function. Set the preferences as shown in the picture below. This will get you a significant speed up.
2. Get yourself a copy of Oxypatcher. It works for us!



VBR to FastMemory	☑	Copyback	▨
Instruction Cache	☑	Data Cache	☑
Instruction Burst	▨	Data Burst	▨
SpeedRamsey	▨	FastGary	▨
MapROM	▨	FastROM	☑
SSP to Fastmemory	☑	Audio Filter	☐
Branch Cache	☑	Superscalar	☑
Half Instruction Cache	☐	Half Data Cache	☐
Disable FPU	☐	Store Buffer	☐



The multi function displays

Each aircraft has three MFDs (the three computer screens in the dashboard). You can use keys 1,2 and 3 to cycle through the different functions of these radars. These are:

Master Warning Panel:
Shows the status of main systems. Green means fine, yellow means slight damage, red means destroyed. The abbreviations are:

ENL	Left engine
ENR	Right engine
WEP	Weapons
FUE	Fuel tanks
ABK	Air breaks
WBK	Wheel breaks
UC	Undercarriage
COM	Communications
FLP	Flaps
HUD	Head up display
RAD	Radar
OIL	Oil pressure



Systems display:
Details speed, altitude, bearing, fuel, range etc.

Weapons display:
Diagrams the status of the aircraft's weaponry pylons.

FLIR
Forward Looking Infra Red shows the forward view via the laser target designator when not targetting a ground installation.

DLIR
Downward looking IR, as above but when a lock is made, the view switches to this.

Ground Target Data
Shows the target and your current distance from its.

RADAR Views.
The radar has various scan modes. Not all are available for all aircraft.

Horizontal Situation Radar
360 degree scan around your aircraft. Use the 'r' key to select 2, 10, 30 or 50 mile range.

BVR radar
Beyond visual range radar gives the EFA2000 a long range facility which scans a narrow beam at up to 180 miles allowing ultra long range missile launches.

MMD
Moving map display. A while line indictates the direction your aircraft is moving.

Control MFD
Displays in flight control info. Includes adaptive wing indicator for F-22 and EFA 2000 and thrust vectoring on F-22.

Radar Symbols:

Air to air –
Red dot: Hostile
Red square: Hostile aircraft you are tracking
Red flashing diamond: An airborne missile

Air to ground –
Red dot: Hostile mobile ground target
Red flashing diamond: Airborne missile
Red flashing dot: SAM radar
Blue dot: Friendly surface vehicle

Those keys in full

Engine:	
[	Engine 1 on/off
]	Engine 2 on/off
+	Increase thrust
-	Decrease thrust/afterburners
*(numeric pad)	Increase afterburners 1 stage
/ (numeric pad)	Kill afterburners
Autopilot	
A	Toggle autopilot
7	Auto mode 1
8	Auto mode 2
9	Auto mode 3
0	Auto mode 4
tab	Auto recovery
Landing	
#	Turn on ILS
w	Toggle Wheel brakes
g	Toggle landing gear
alt/b	Drag parachute
h	Toggle hook
alt/l	Auto landing
Combat	
Return	Select air to air weapon
backspace	Select air to ground weapon
space	Fire weapon
c	Change target
z	Activate / target laser targetter
x	Break laser target
<	Zoom laser targetter out
>	Zoom laser targetter in
cursors	Move targetter
Defence	
0 (numeric pad)	Chaff
. (numeric pad)	Flare
e	Ecm
s	Stealth
esc	Eject
alt/j	Jettison fuel tanks and bombs
Systems	
1	Cycle mfd1
2	Cycle mfd2
3	Cycle mfd3
l	Repeat last message
m	Map
r	Change radar range
shift/n	Night sights
alt/h	Toggle HUD
Game controls	
p	Pause
'(above tab)	Options
t	Time warp
d	Flight details (external view)
shift/q	Quit
Views	
f1	Forward view
shift/f1	Forward view, no cockpit
f2	Look left
f3	Look right
f4	Look behind
f5	External view
f6	Fly-past view
f7	View your aircraft and enemies
f8	Missile view
f8 (twice)	IR missile eye view
f9	Target view
9 (on numeric pad)	Look up
3 (on numeric pad)	Look down

Tips Central

It's time for some more tips and cheats supplied by you, the ever-devious CU Amiga readership. So, on with the tips!

Sensi Soccer 96/97

Tips Central just wouldn't be the same without some Sensi Soccer tips would it? Here is a tip that you can eat between meals without ruining your appetite, which comes courtesy of R Grubb of Bidford on Avon.

When a penalty is awarded against your side, wait until a player steps up to take the kick, then with the fire button held down (and don't let it go), press the replay key (R) repeatedly and they will eventually get bored and then give up.

Theme Park

It just wouldn't be the same without a Theme Park tip would it? That sounds familiar... anyway, this everlasting gob stopper of a tip comes from Gregory Cox of Cardiff.

When you're making your own rides, like rollercoasters, monorails and so on, first make them as small as possible, so they are just a little loop. Obviously that won't cost you much, but you can then go back and make adjustments to expand the ride as much as you like. Because you are only charged for the initial size of the ride, this way you can get great big rides for peanuts!

Ultimate Soccer Manager

Scribbled on the back of Aussie Jim Anderson's Slamtilt tip was this selection of crumb-coated deep fried nibbles with sour cream dip (or cheats as they are otherwise known) for Daze's Ultimate Soccer Manager.

First enter your name as MAKE BELIEVE, then use the following keys to cheat your way to victory:

1: win the match 1-0
2: win the match 2-0
3: win the match 3-0
Escape: finish the game with the current score
G: to score an instant goal during the match
M: get yourself a nice little £100,000 bung for no apparent reason.

Slamtilt

Here's a tasty chocolate covered tip for all you Slamtilters to dunk in your afternoon tea, coming again from Jim Anderson of Sydney Australia.

To get five balls, rather than the normal three-ball multiball, type LONGPLAY before you start a game when the table scrolls up and down. You'll get a message to confirm that it's worked, if indeed it has. Jim also has these codes which display hidden messages:

DANIEL
WHIPLASH
BARRY
COW
CHEAT
IAIN
KLAUS

Teeny Weenies

This one comes from the extremely fleecy and canine-sounding Daniel Huskie of Stenhousemuir, up in Scotland. He has kindly offered up this picnic of codes for Teeny Weenies.

Oh, and we can inform you that he's only nine years old, just for the record.

2: YODEL HEEE
3: SOAPY SPONGE
4: GREAN CHEESE
5: CRISPY TOE CHEESE
6: BARBA PAPA
7: SPEEDY JEWEL BONUS
8: HECTORS HOUSE
9: THE CLANGERS
10: MARY, MUNGO AND MIDGE
11: THE FUNGUS FEELER
12: INVISIBLE BONUS
13: EAR WAX
14: SMELLY LEFT SOCK
15: SPOTTY PIMPLE BUM
16: A.RAW PORK CHOP
17: HAPPY FACED DOG
18: THE CATS NOSE
19: THE AIR VENT
20: SPEEDY BONUS

Charlie J Cool

Lawrence Montgomery seems to be something of a fan of this little platformer. Maybe he finds an affinity with the main character, what with them both having silly names (no offence mate!). Anyway, here are Monty's most useful tips. Pause the game and type in the following:

CURRY AND RICE – 20 lives
DREAMZONE – Invincibility
WAIT DA MAM – Infinite lives
BAD BOY – Skip a level

You need help

If you would like some help on any game – or you have some tips that you'd like to share with your fellow readers – then please write to us at Tips Central at the following address, remembering to mark your envelope Adventure or Arcade accordingly:

Tips Central,
CU Amiga Magazine,
37-39 Millharbour, Isle of Dogs.
London E14 9TZ.

Dungeon Master 2

Old Monty's back again with some more codes, this time for the thinking man's Doom, Dungeon Master 2.

EE OH VEN = Poison Gas
UM FUL = Light
UM FUL IR = Fireball
LO ZO = Open Doors
UM VI = Healing
UM VI BRO = Cure Poison

Capital Punishment

Capital Punishment, gruesome and quite gory Amiga beat 'em up, has given people more trouble than a porcupine in a barefoot wine pressing festival. Authors ClickBOOM come to the rescue with these official hints and tips.

Cheats

There is a cheat mode in CP that doubles the strength of your fighter. Just go to the warrior selection screen before the fight and slowly press:

up , down , up , up , up , down
(Corben Wedge)
down , down , down , down , down , down (Wakantanka)
up , down , down , up , up , up
(Sarmon)
down , up , up , up , down , down
(Demona)

There is also a cheat to use Ninja who is otherwise only available as a computer controlled warrior.
Press:
up , down , up , down , down , up

General tips

1. Head strikes do maximum damage, leg strikes do least. Leg strikes do no stamina damage.
2. Blocks stop you losing energy but not stamina.
3. Strikes do 50% more damage when your enemy is in the air.
4. Strikes do 100% more damage when your opponent is fatigued.
5. Uppercut is your strongest blow, use it on fatigued enemies.
6. Don't be soft, kick your enemy when he is down!
7. When an opponent gets up from the ground he is very briefly invulnerable, watch out!
8. Fool your opponent by faking fatigue... press fire 5 times while in the air and you will appear to be fatigued when you land, but you can go on fighting!
9. While your enemy is in the air, any hit will throw them to the ground.
10. Don't jump with your back to a trap, or a single blow will see your skewered.



Dirty tricks

1. In factory, player two should immediately press uppercut to place any 'early jumper' onto the meat hook.
2. Whenever you are in a fatigue, switch to auto fire, and you will be instantaneously out of it.
3. In timed fights, if you have the most energy near the end, block hits – it will take your stamina, but not energy. Energy wins the fight!
4. Throw your enemy to death by carefully positioning yourself to grab then throw him (forward and down) as soon as he gets up.
5. Corben, Sarmon or Demona can backflip (back and up) to hit the enemy from behind. Demona and Corben should use fast low kicks when enemy is in the corner. He can't get away, and won't fall into fatigue as leg hits don't take away the stamina.
6. Install the CP level cheat file from CUCD or download it from www.clickboom.com or any Aminet site.

Beating epic mode

The Sewers

Demona: Use whip (fire + up or fire + up and back) to keep that long-legged monster at a safe distance. Try to get it into a corner – hard but worthwhile.
Corben Wedge: Move back as the alien jumps, then before he lands, use a mid-kick after pulling back (fire + forward) or a jump forward and kick (up and forward + fire). This jump-kick you can repeat twice or maybe even three times if you are lucky.
Whenever alien falls on the ground kick him a couple of times, then jump back.

The Temple

Demona is the defender of the Temple (unless you choose her at the menu, in which case Wakantanka is here). Keep her at a distance, and whenever she jumps, and is about to land, jump forward with kick.
The trap on this level is the trident of the statue on the right.

The Nest

Your best bet here is Demona. If you didn't choose her in the beginning, make sure that you free her at the Teacher's, otherwise you will need to be the CP master to finish this level. Use Demona's fast whipping hit (fire + back and up). Get alien in the corner and repeat frantically. Although you may think this is unfair, it does work.

To the secret room...

Sarmon awaits you here, and he is the fastest warrior, so you will have to master close combat, or use Demona's whip. This level hides a secret room to the right. You enter it after uppercutting the enemy from a distance to the right.

Midway

Corben Wedge awaits you here, and you should use either Wakantanka or Sarmon against him. His favourite move is rolling kick and triple kick-combo.
When you put him on the electricity move back, he will be briefly invincible when he comes down. Also, he likes doing the rolling combo right after, so stand back and wait for another chance.

The Approach

Ninja can be stopped by:
High-kick while he is doing his favourite rotational jump.
Jumping and kicking before he reaches the ground. Don't try to fight him in the air, and be especially careful not to end up in the corner, as he will draw his sword.

The Master

If you expecting a regular fight here, you are in for a surprise – Qwesul has the power to morph into animals and objects!
Bat – use high kicks in order to push him back.
Puma – mid kick.
Rolling spike ball – get back or jump over it.
Snake – get back or use mid kick.
Cape – mid kick.
When he disappears into the ground, he usually appears right behind you, so whatever you do be very careful.

Combos

These are the real killer moves. Press fire three times without moving and then push the joystick in any direction. Depending on which way you move the stick, you get a different combo. Get some practice – you need those moves if you want to survive...

AMIGA

ISLONA

WORK, REST AND PLAY, PLAY, PLAY

DISK - £14.99

MASTER AXE

Do you dare take up the challenge? Do you have what it takes to become the champion of champions, to become MysterX? From living legend Master Neil Axe, 3rd Degree Freestyle Kung Fu Black Sash, comes one of the most innovative martial arts simulations ever. Master Axe's active involvement has produced a game of unrivalled accuracy. Learn real martial arts moves as you fight your way to the top, but be warned - your skill, nerve and character will be tested to their limit.



DISK - £14.99

World Golf

"An addictive and truely original golf game". 1-4 players in practice and tournament modes.
Five authentic courses from around the World. Five skill levels. Select between 1, 2 or 4 full eighteen hole rounds. Auto and manual club selection. Ambient sound effects and realistic ball actions and far more.

Wendetta 2175 CD

Take control of a heavily armed spaceship with an expandable weapon system.
1 or 2 player simultaneously through horizontal 2D terrian and over super fast pre-rendered 3D worlds.

Amiga CD : £19.99

Trapped CD

13 Levels - Furious Sound with more than 100 sound-fx. Five different characters Masses of spells, weapons etc. The fastest 3D engine ever on the Amiga.

Amiga CD : £19.99

CYGNUS 8
NEW

DISK - £14.99

Construct a large scale trading empire in a rich galaxy of planets, turn criminal and raid space p fleets? It's your choice in this to freedom sci-fi simulation.

Cygnus - 8

Amiga CD - £29.99

Fasten your seat belts and be prepared for an experience like you've never seen before on your Amiga. Flyin' High is here and it takes you to a new dimension of 3D-Racing Games. Step on the gas and race over fully textured and absolutely crazy tracks, on asphalt, mud, field paths and slippery ice.
On a 68030 Amiga the game is great fun. Playing with 4 players on a 68060 is really impressive. *Req: AGA 6MB ram, Harddisk.*

"Sixth sense investigations" is a new graphics adventure for the Amiga, based on the classic LucasArts style games. The base storyboard tells of a crazy young guy who has the ability to communicate with the spirit of a sarcastic man. A friend, who thinks of himself as a detective, profits from the psychic abilities of his friend (the crazy psychic guy), by using his skills to solve the most bizarre problems ofthe rich.
Req: AGA 2MB ram.



NEW
BLOCKHEAD
NEW

DISK - £7.99

Block Head

Fast thinking puzzle game comprising: Intuitive Controls, Challenging difficulty curve. Random Level mode, dozens of power-ups, Great music.

NEW
Marblelous

DISK - £7.99

Marblelous

100 brain teasing levels each more difficult - you control a metalic ball using your mouse and have to find your way to the exit.

DISK - £9.99

XP-8

XP-8 is a 256 colour AGA vertical scrolling shoot'em up, featuring 4 way - 50fps scrolling, wicked music, sound effects and amazing animated alien space-craft.



DISK - £14.99

Kargon

Kargon is a completely new challenge! Up to 4 players can compete in order to find one thing out: Who the greatest magician among them is.

NEW
TESTAMENT

DISK - £19.99

Testament

When it gets dark, the living dead begin their celebration on the graveyard. Make your way through swampy tracks and dark tomb monuments.

LOWEST PRICES

BARGAIN CLASSICS

Only £2.99 each or 2 for £5

HUGE STOCKS

Cardiax
St. Dragon
Diabolik
Builderland
Hybris
Ziriax

Wings Of Death
Cosmic Pirate
International Tennis
Rennaisance
Great Giana Sisters
Charlie J. Cool
Katakis

Hostages
Targhan
Gotcha
Titus the fox
Turn It
Norris!



CD or DISK - £14.99

CIVILIZATION

Available on CD-ROM or Floppy

Build An Empire To Stand The Test Of Time.

You could be the one person in history that builds an empire that never falls.

- Discover New Technologies -
- Build Wonders Of The World -

STREET RACER

An unrivalled racing and fighting experience! (Its time to make some more friends).
Street racer has been totally revamped for release on the newest, fastest hardware available, and it shows.
£14.99. *(Amiga CD & Disk)*

CALL: 0 1793 432176 TO ORDER

Islona Entertainment **- Epic House, 43 Akers Way, Swindon, Wilts, UK**

Most items are held in-stock ensuring fast delivery. Please add a total of £1 per title for P&P within the UK and Overseas.
Trade enquiries welcome, All prices listed include VAT. E&OE *Free Games Catalogue Available on Request.*
Please make cheques payable to ISLONA - *Islona* is a part of the Epic Marketing Group of Companies.

Techscene

Wahoo! We've a monster review of Aladdin 4D, A1200 Ethernet, Oxpatcher, Visual IFX and the Epson Photo printer to sink your teeth in to!

50 Aladdin 4D

In this special extended review, John Kennedy takes a look at Nova Design's revamped Aladdin 4D version 5.

58 Hydra A1200 Ethernet

Real A1200 Ethernet via PCMCIA. Mat Bettinson asks if it's worth the asking price.

58 Envoy 2.0

The network filesystem to use with Ethernet or any other kind of network. How does Envoy stack up after all this time?

59 OxyPatcher

Finally there's an alternative to Phase 5's Cyberpatcher for 68060 accelerator owners. Does Oxypatcher deliver better results?

61 Visual IFX

A brand new effects based add-on for Image FX falls under the spotlight. Just what is it really capable of?

62 Epson Stylus Photo

Epson's latest offering in the Stylus range. This one adds two new colours for enhanced printing. Larry Hickmott checks it out.

64 PD Scene

Jon Brooker looks at a selection of great new PD-software and manages to contain himself for long enough to write about it.

66 PD Utilities

... Basic Note Tutor V2, Tutenkhamun, Directory Opus Help Guide, Class HD Utils 24... Andrew Korn gives you the full S.P.

70 CD-ROM Scene

All of you lucky CD-ROM owning beggars get to choose from a veritable feast of CD delicacies.

72 Art Gallery

Add a much needed splash of colour to your day, with the premium choice of your art contributions.

Aladdin 4D 50

Hydra A1200 Ethernet 58

Epson Stylus Photo 62

Visual IFX 61

Here it is... the latest incarnation of an Amiga stalwart. Has it come to solve all of our rendering problems?

Aladdin 4D v5

■ Price: $279 ■ Supplier: Nova Design ✆ +1-804 2821157 http://www.novadesign.com

In the old days, there was a slew of 3D modelling programs, including Imagine, Lightwave, Caligari and Aladdin to name a few. Of these, none used the standard Amiga system of pull-down menus, requesters, windows and buttons.

Around this time, every programmer thought they knew better when it came to user interfaces, and consequently abandoned the standard Amiga look and were all pretty difficult to get to use. This was especially true, in my view at least, of Aladdin.

The latest rendering program released was HiSoft's Cinema4D, and thank heavens that this time we had the standard menus and buttons, and it worked properly with graphics cards. There's no need for modern Amiga software not to work in this way, and at this stage in the Amiga's existence there's little point in trying anything else.

Now, with a change of publisher, it's back. We're promised a 100% style guide compliant interface, with full support for CyberGraphX compatible graphics cards. What's that – an ARexx port? Could this be the software you've been waiting for to take advantage of all that expensive hardware you've bought?

Look and feel

True to their word, or at least, the word on the back of the box, Aladdin is a true Amiga program. Screens, menus and requesters are all familiar and easy to use.

The concept of tab lists has been pinched from the PC, and these make it easy to switch from one list of options to another.

Keeping up with Amiga developments, there is a multitude of possible display modes to work in and display renders. Native Amiga (including AGA) is joined by support for the following hardware: DCTV, Opalvision, Resolver, Retina and VideoToaster.



▲ **The toolbars make common features quickly accessible, but the icons won't win any ergonomics awards, and dragging them around the screen caused frequent crashes.**

Picasso or CyberGraphX cards are not included by name, although on my Picasso II system the new screen modes were listed under the standard Amiga drivers. This will probably be true for any CyberGraphX compatible card.

Once you have selected your display modes for the editor, preview and render screens, you can roll up your sleeves and get down to some serious 3D work. Aladdin is a point based program, which classes it alongside Imagine and Cinema4D rather than Real3D, which is based on primitive solids.

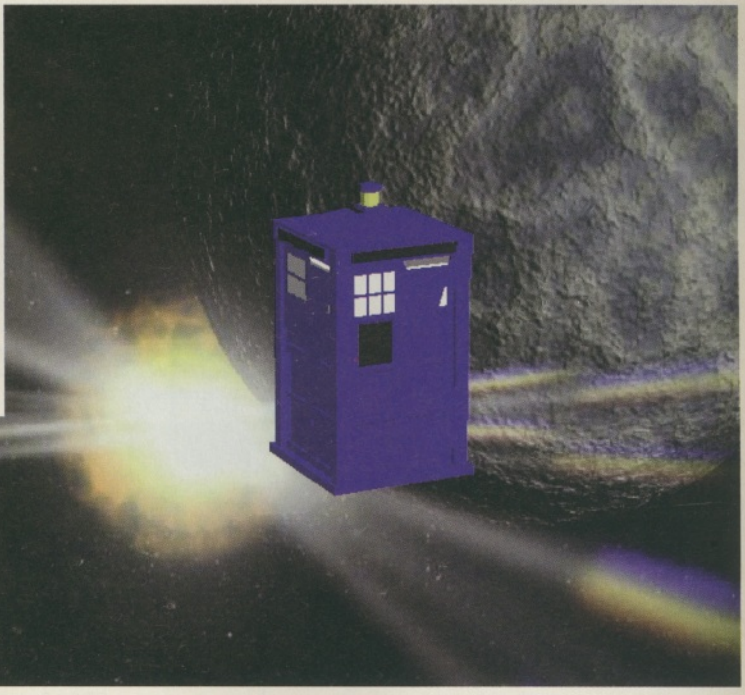

▲ **With foreground and background options, you can quickly use previously rendered scenes to create new images. Guess which part I rendered in this image...**

Open Sesame

The program opens with a pleasant enough textured backdrop, and a single view window onto your blank 3D canvas. Two toolbars provide access to commonly used editing and processing options.

The single view can be spun around by using the numeric keyboard (sorry, A600 owners – although you would be mad to attempt 3D rendering on such a slow 68000 based machine anyway). This will allow you to quickly get a feel for the object that you are creating. When it comes to editing, you are more likely to require a flat view, that is a head on or straight down view. Pressing the space bar achieves this, and you can then add/move points and polygons simply. The view is always wireframe, with no hidden-line removal or shading options available.

Primitive shapes are often the quickest way to get started, and there are two families of shapes you can create. "Platonic Primitives" are 3D shapes such as Tetrahedrons, Isosahedron and Dodecahedrons. Though not particularly useful in their native form, you can quickly drag and twist them into more interesting shapes.

The "Quadratic" primitives include ellipsoid and torus shapes: it's from here that you can create a Sphere for example. Or a Hyperboloid. Again, more complex shapes are maybe not so useful for everyday objects.

An object which will never actually appear in your scenes, but which is vital nevertheless, is a CSpline.

The "C" stands for Control – exactly what the curve does, control other values. Once you have defined the curve, it can be used for shaping a bevel, or controlling the movement of an object over time.

Textures

Like any good rendering program, every object used in Aladdin can have its appearance altered in several ways. Firstly, you can change the colour and other physical properties. Nothing magic about that, and all the usual settings are here to play with.

These are all included in an "attributes

Important features

- Style-guide compliant user interface
- CyberGraphX support.
- ARexx scripting (untested in this review copy)
- AmigaGuide help
- Thumbnail load/save requesters (missing in this review copy)
- External tools and plugins
- Spline-controlled camera movements, with multiple targets
- Animate lights, lens flares, textures, objects
- Hierarchial motion paths
- Gaseous objects
- Fountain particle system
- Procedural and bitmapped textures
- Soft shadows
- Motion blur







◀ **The same object can be rotated to produce different viewpoints, with or without perspective. Only one view can be displayed at a time.**

Continued on next page ▶▶▶



▲ The Platonic objects are named after the well-known, dead philosopher Greek guy, who used to do a lot of 3D rendering in between drinking Ouzo and lying on the beach.



Render Settings

Light: ☑
Phong: ☑
Textures: ☑
Flares: ☑
Gases: ☑
Background: ☑
Overlay: ☐
Rounding: ☐
Z Compositing: ☐
Fill: ☑
Gouraud: ☑
Transparency: ☐
Fountains: ☑
Shadows: ☐
Foreground: ☐
Fog (Depth): ☐
Motion Blur: ☐

▲ Tabs make it easy to squeeze lots of settings into one window

list". Each attribute setting can change per frame, and this is altered using the sliders which control the time line. It's unusual controlling the settings for time here in the attribute window, but it makes sense.

It's also unusual to separate these attributes from the textures, but that's how it's done. Probably in order to prevent a gadget melt-down, the textures requester is invoked separately. From here you can apply both procedural (mathematical) and bitmap textures. These can define the usual colour or bump settings.

For extreme cases, it's possible to apply an Anti-aliasing filter to blur the bitmap slightly and avoid chunky pixels appearing where you least expect them. It can also be useful when using bitmaps with few colours – a texture with 16 shades will develop many more when anti-aliased, and therefore look a lot better in 24bit renders.

Animated bitmaps are possible, for use both as textures and background and foreground images. The usual sequential numbering system is used. Annoyingly there is no way to preview a bitmap before using it. There is one more window associated with these settings, and that brings up the shading options, required to round off the corners of shapes such as spheres.

As all objects are composed of facets, this is a required step if you want to render realistic objects.

Animation/ Special effects

As mentioned, the appearance of the objects over time is defined from within the attribute and texture requesters. This means that objects can completely change how they look as time progresses.

Walkthrough



▲ The first step to rendering an image is to define a model. You might want to cheat, and make use of some previously created objects. With coaxing, Aladdin will load LightWave objects.



▲ Bananas are yellow. Using the Attribute List window, assign a yellow colour to the banana object. It takes practice to discover the best settings for 'hardness' and 'specularity'.



▲ Now we can add more objects to the scene: in this case a dish for the banana to sit on, and a table to hold them all. We'll also need a light source, and background to the scene so it's not totally black.



▲ Here we apply a procedural texture to the table top to make a lovely bright tablecloth. Similarly we apply a texture to the background, although this time a bitmap image of a cloud is used.



▲ The final image. It looks rather flat, because there are no shadows in the scene. Creating the image again with shadows switched on increases rendering times considerably, and so you should only use them when necessary: not in an animation for example.

It's also possible to change an object's position, by creating a path and setting up the object to follow it.

Aladdin deals with camera objects to provide the view. As with other packages, the camera is locked to a target. However, you can switch the targets mid-animation, and the camera will pan between them. You can even have multiple cameras to make cutting between different viewpoints possible.

There are three other effects which Aladdin is proud of: gases, flares and fountains. The gas system makes it easy to create areas of space which are less transparent than usual.

The volume of the gas cloud is contained

Continued on page 54 ▶▶

yetech's Autumn Amiga Specials : Accel's from £68.95 - Forget '030/50's - get ~3 x the power with an 040/25MHz (19 MIPS) for just £138.95, 39 Mips '060/50MHz £278.95; A600 33MHz '030/MMU/FPU /standard simm to 32MB - £99.95; DIY-EZ-Tower from £99.95; 8-speed CDPlus £149.95; A1200 high speed serial port £46.95; 14.4K modems £24.95; SX32 from £149.95; RED=Price down, Blue=New product.

The All-New Eyetech EZ-TOWER

"This definitely one of the easiest solutions to building your own tower." John Kennedy, Amiga Format - July 1997

If you can use a screwdriver you could build your own A1200 tower system in less than half an hour!

t Couldn't be Easier!

Remove the case top and keyboard ribbon cable *(No shield removal required)*. Slot in the ribbon cable from the optional PC/Amiga keyboard interface. Mount existing and new hard and floppy drives and CDROM units in the bays using the screws provided. Connect up the drives power and data cables. Clip the A1200 motherboard/base into the custom backpanel. Push on the power/HD/FDD LED adapter and the A1200 power connector. Put back the outer case. Thats it! ...

Now You've Got Tower Power!


FULL tower with 10 drive bays as standard
External SCSI socket/ Squirrel internal drive adapter*
250 Watt PSU and A1200 power cables supplied as standard
All A1200 rear ports are directly accessible
Space for A1200 Zorro slots* or PC motherboard* and cards
PortPlus* provides 2 extra Serial & 1 extra Parallel port
Fully accessible/ usable PCMCIA
CDROM & A1200 mixed audio out sockets/adapter*
Now comes with DF0: faceplate and cable.
Adapters* for using standard PC floppy drives as DF0: / DF1: inc high density PC and Amiga options
A1200 main board with 66Mhz '060* & 64MB*

(*optional extras)

The A1200 EZ-Tower

NEW! Mk2 EZ-Tower with PSU - *still only £119.95*

DIY option - all parts/instrs provided - £99.95

EZ-Key **A1200 adapter** for PC & Amiga kbds- just push in the ribbon cable!	£39.95
7 x Zorro II slots expansion board - including 5 x PC ISA slots for GG2 bridgeboard, ethernet etc. *With accelerator pass-through.* Fits most towers.	£179.95
Single Zorro II slot adapter for graphics card - *with accel pass-through.*	£99.95
- as above with built-in *EZ-Key* i/f (Both available August 1997)	£134.95
EZ-DF0 **A1200 tower DF0: diskette drive** with faceplate and interface	£34.95
Squirrel adapter for EZ-Tower - with int HD/CDROM & ext Centr's 50w skts	£19.95

Collection, fitting and delivery service - Please ring

..Or buy a CDPlus unit (below) and get an EZ-Tower for just £99.95*

(*as an alternative to the regular CDPlus case)

SX32Mk2 & SX32Pro *Internal* Expansion for the CD32

STOP PRESS!!!

The Award Winning SX32 Pro is now even more affordable

The SX32Pro and SX32Mk2 add ...

- √ 40 or 50MHz '030 MMU CPU and FPU socket (33Mhz FPU socket only on the SX32Mk2)
- √ Simm socket for up to 64MB of 32 bit fast (60/70ns) RAM (up to 8MB fast (70ns) RAM on the SX32Mk2)
- √ Buffered IDE interface for internal 2.5" hard drive *and* second hard drive, SyQuest, Jaz *or even 8 speed CDROM* (optional extra on the SX32 Mk2)
- √ Sockets for RGB video (23 pin), VGA video (15 pin), Parallel port (25 pin), Serial port (25 pin), Floppy disk port (23 pin)
- √ Jumper-selectable for PC or Amiga keyboard input (external adapter on SX32Mk2)

... to the CD32's existing mouse, joystick, keyboard, audio, RF, composite video and SVHS ports.

What do the reviewers say?

Amiga User Int'l	*"95% - Definitely Recommended"*
Amiga Computing	*"90% - A Dream to Use."* *Blue Chip Award*
Amiga Format	*"96% - Absolutely Top Notch"* *Gold Award*

The SX32Pro

SX32Mk2 - *sale price -*	**£149.95**
SX32Pro-50 - *sale price -*	**£299.95**
Genuine Amiga 89-key compact keyboard	*£34.95*
SX32 floppy, hard drives 20MB-1.8GB, RAM	*- Please ring*

All models include full pictorial fitting instructions,WB3.0 & utilities on CD and 'Click-and-Go' hard drive installation diskette

Special CPU purchase Last few - SX32Pro-40SE. A Special Edition SX32 Pro with 40Mhz '030EC processor (no MMU) - *Just £249.95*

HEALTH WARNING *"A buffered IDE interface is essential to avoid overloading of the A1200's IDE port when adding extra devices" - John Kennedy - Amiga Format - July 1997*

Don't be tempted to skimp. Fit an Eyetech 4-way IDE/ATAPI 3-chip buffered expander to preserve your Amiga's Health. *The original and best - Just £39.95*

Q. What fits in a floppy bay and reads & writes 120 MB PC & Amiga cartridges AND 1.44 MB PC diskettes?

A. *The All-New LS120 ATAPI drive from Eyetech*

- √ *120MB backup and PC 1.44MB diskette compatibility in one unit*
- √ *120MB cartridges just £14.95 each or £34.95 for 3*
- √ *Bare drive just £119.95. IDEfix 97 and buffered interface may be needed - both available from Eyetech - please ring for details.*

The Top-Rated Eyetech *CDPlus* for the A1200

8- or 12/16- speed external CDROM unit in quality, CE-approved case with heavy duty PSU
Leaves trapdoor free for accelerators / memory expansion and the PCMCIA slot free for digitisers, modems, samplers etc
Option to add additional HD's, CDRoms, SyQuests, *IDE Zips*, Jazs, SyJets, ATAPI tape streamers etc powered from the CDPlus unit
Comes with special Eyetech *'060-compatible* Mk2 4-device EIDE buffered interface board - easily fitted in minutes with no cutting/drilling (Note that IDE CDROMS *must never* be directly connected to the A1200 without a buffered interface - ask any qualified electronics engineer!)
Gold plated audio phono sockets at rear (CD+ only) and front panel headphone socket and volume control

The CDPlus and SyQuest EZ135 drives. The IDE Zip Drive is the same size as the EZ135

Amazing Value ***NEW!* 24-Speed *-only £199.95***

8-speed - *only £149.95* **16-Speed *-only £179.95***

Considering a *PowerStation?*

The CDPlus is now available with a, 230W, CE-approved, PC MiniTower* or Desktop* case (which can also power your A1200) - *for only £20 extra*

(*as an alternative to the regular CDPlus case)

What do the reviewers say?

Amiga User International - *97%*
"... It all worked faultlessly ... "
Amiga Format - *96%*
"... An absolutely superb bit of kit.."
Amiga Shopper - *90%*
"... This is a quality product..."

The Amazing Iomega *IDE* Zip Drive

Another first from Eyetech

- √ *Can be used in place of - or as well as*- the internal hard drive*
- √ *Use a different bootable cartridge for each application or family member*
- √ *Ideal for transferring multimedia data between Amigas and/or other platforms*
- √ ***Fits in any Amiga/desktop/minitower floppy drive bay or in external case***

CARTRIDGE CHANGES AUTOMATICALLY RECOGNISED!

The IDE Zip drive fitted in an A1200

Bare IDE Zip drive *(inc Eyetech V2.0 Ziptools)* **- Just £119.95**

100MB Zip cartridges just £14.95/1 or £34.95/3 (*A600/1200 buffered interface needed)

A1200 *InstantDrives* & *TowerDrives*

InstantDrives and *TowerDrives* are *only* available from Eyetech

"The fastest drive I have tested on any platform ...95%" - David Taylor - Amiga Format February 1997

Important Notes!

Thinking of buying a **BIG** drive? Dont waste your money on ***ANY DRIVE OVER 4.3GB*** as the Amiga O/S doesn't support it! (2^32-1 bytes actually). Be warned!

3.5" hard drives - even those described as *'Slim'* - are usually 1"/25mm high and ***will not*** fit in an A1200 without significant modifications to the case and metal shielding - which itself reduces the value of your computer.

- √ InstantDrives require no hole drilling, case clipping, or shield removal required and come Inclusive of full fitting kit and easy-to-follow pictorial instructions
- √ All drives come ready-to-use with WB3.0 preinstalled & WB2.x install script.
- √ All drives over 350MB also come with over 45 top quality utilities (not shovelware) *and* MMe multimedia authoring software preinstalled, configured and ready-to-run.

InstantDrives:		2.56GB AV(~3MB/s)	£219.95
TowerDrives:		1.7GB	£159.95
2.11GB	£169.95	3.2GB	£189.95
4GB - Take your Amiga *to the limit!* - for just			£249.95

D-I-Y and Bargain Corner

Hard-to-find parts for your Amiga project

rd, floppy drive cables and cases	
5"-2.5" 44-way 2.5" HD cables 9cm **£8.95**, 13cm **£9.95**, 60cm	£19.95
5" 3x44-way hard drive cables for 2 x 2.5" drives (6cm+6cm)	£12.95
5" power & data cables for A600 & A1200 **£14.95**; full fitting kit	£24.95
5" external hard drive case **£19.95**, 3.5" removable drive case	£24.95
al CDROM case (no psu)	£4.95
1 40-way IDE cable for 3.5" HD/CDROM ~85cm/2' 9"	£9.95
tom 3 x 40 IDE cables to 1.5m/5' (enclose drawing)	£19.95
5" hard drive to 5.25" bay mounting adapters	£5.95
5" hard drive to 3.5" bay with 3.5" data/power cable adapters	£11.95
5" floppy/SyQuest/Zip drive to 5.25" bay mounting adapters	£6.95
pin m-f detachable data cable forexternal 3.5" HD/CDROM's	£9.95
line external floppy/IDE SyQuest/IDE ZIP/IDE Jaz case	£9.95
SI cable 25way 'D'(m)to 50way Centronics (m) (1m)	£9.95
SI cable 50way Centronics (m)to 50way Centronics (m) (1m)	£9.95
34pin ribbon cable + faceplate for A1200 int'l floppy in tower	£12.95
p-M to 23p-F external floppy ext'n cable **0.5m £12.95; 2m**	£14.95
dio & video cables and adapters	
mm stereo jack plug to 2 x phono plugs for CDROM	£5.95
ROM standard 4 pin inverted T audio connector & phono plugs	£9.95
ono plug x 2 to phono plug/socket x 2 audio mixer leads	£6.95
reo 2 x phono plug to 2 x phono plug 1.1m/4' (4.8m/16' £9.95)	£4.95
reo speakers (pair), with amp (16wPMPO) & mains psu	£9.95
wer supplies , cables and PC towers//desktops with integral psus	
E or SCSI CDROM case, 40w PSU, audio & data connect's	£59.95
anced metal cased PSU for A600/A1200/CD32/CDROM/ external HD (fit your old lead - instructions provided)	£29.95
i-tower or desktop case with 200W/230W PSU, CD & HD/Zip bay, power connector block, resistor, cable restraint etc, & full instr'ns	£39.95
nuine CD32 replacement PSU	£14.95
in M-F extension cable from PSU to external HD/CD 0.9m/3'	£9.95
pin m floppy drive connector to 4 pin HD/CDROM power plug	£9.95
scellaneous	
200/SX32 **internal cooling fan** - dissipate that extra power!	£14.95
A 23-15 **pin adapter** for A500/600/1200 **£12.95**; buf for A4K	£19.95
00 **keyboards** (new) for A2000/3000/4000* (*adapter +£5)	£49.95
Hz **capable PGA FPU** for SX32Pro-50 or accelerators	£39.95
iga **CDROM disks** - our selection - 5 for	£10.00
200 **RAM boards (clock, FPU skt)**	£29.95
iga **microswitched mouse with mousemat**	£6.95
/14.4 **compact data/fax modems £49.95, 14.4/14.4 from**	£24.95
200 **Workbench 3.0 disks (5) with WB3.0 & user manuals**	£19.95

Two new A1200 Expansion Products from Eyetech

PortPlus - high speed serial and parallel port expansion

- √ *2 x **460Kbaud** buffered serial ports with low CPU overhead*
- √ *PC & Amiga compatible parallel port transferring up to **500K bytes/sec***
- √ *Optional high speed PC-Amiga & Amiga-Amiga **networking software***
- √ ***Leaves PCMCIA & trapdoor free** ; accelerator friendly & very easy to fit*

PortPlus - just £89.95! (WITH parallel port driver!)

New! *PortJnr*- 1 high speed serial port - *just £46.95*

Apollo Accelerators - Unbeatable pricing

A600 - **33MHz '030 with MMU & FPU exp to 32MB**		£99.95
Entry level A1200 Accelerators - Unbelievable value		
25MHz '030 with MMU & FPU. (5 Mips)	*- Just*	£68.95
33MHz '030 with MMU & FPU. (7 Mips)	*- Just*	£79.95
Power User A1200 '040/'060 accelerators (no tower req'd)		
25MHz '040 with MMU & FPU. (19 Mips)	*- Only*	£138.95
33MHz '040 with MMU & FPU. (25 Mips)	*- Only*	£158.95
40MHz '040 with MMU & FPU. (30 Mips)	*- Only*	£198.95
50MHz '060 with MMU & FPU. (39 Mips)	*- Only*	£278.95
66MHz '060 with MMU & FPU. (51 Mips)	*- Only*	£339.95

A Standard A1200 is rated at 1.3 Mips. All measurements from Sysinfo

Memory : 4MB - £18.45; 8MB - £29.95; 16MB - £54.95; 32MB - £99.95

Interface Island

Where your Amiga does more

A1200/A4000 non-Zorro	
4-device A1200 buffered EIDE i/f	£39.95
4-device EIDE interface for A4000	£29.95
***EZ-Key* A1200-PC/A2000 k/b adapt'r**	£39.95
***EZ-DF0* interface for Sony floppy**	£14.95
***EZ-DF0* i/f, with Sony floppy & cable**	£39.95
***DiskPlus* DD/HD Amiga & PC 2x FDD i/f**	
- for A1200 hard drive IDE port	£64.95
- for A1200 clock port	£69.95
- for A4000 IDE port	£69.95
PortPlus 2x 460Kbaud ser + 1 x par	£89.95
PortJnr 1x 460Kbaud serial port	£46.95
Audio mixer skts/leads for EZ-Tower	£19.95
Zorro II/III	
GG2+ - use PC cards in Z2 slots	£129.95
IDEPlus 3x2 IDE + 2x DD/HD PC & Amiga floppies. With full IDEfix CDROM s/w	£79.95

Amiga Drivers for Epson Printers and Scanners

Printed & scanned

EnPrint for the Stylus Range of printers

- √ Unbelievable photographic quality output
- √ 'Preferences' & stand-alone printing program

ScanQuix3 for all Epson scanners

- √ 24 bit scanning with full range of editing options
- √ 'Scan-to-disk' option in Jpeg or IFF formats
- √ Stand-alone use or integrates with your Art package (Photogenics, ImageFX, AdPro, XiPaint, Pagestream 3, DPaint5, ArtEffect, PPaint)
- √ ***Also available for HP, Mustek & Artec units***

EnPrint v2.1.3	- only £24.95
ScanQuix v3.0	- only £59.95

2.5" InstantDrives for the A600, A1200, SX32 & SX32 Pro

344MB	A 2.5" drive ideal for the SX32Mk2 and for the A1200/A600	£99.95
540MB	A fast, superslim drive with ample capacity for most users	£129.95
810MB	A superb, superslim drive ideal for users of serious applications	£169.95
1.08GB	The high performance superslim drive is ideal for power users	£179.95
1.8GB	This top-of-the-range drive is perfect for the A1200 & SX32Pro	£199.95

Eyetech Group Ltd
The Old Bank, 12 West Green,
Stokesley, N Yorks, TS9 5BB, UK

Tel UK: 07000 4 AMIGA
01642 713 185
Tel Int'l: +44 1642 713 185
Fax: +44 1642 713 634
eyetech@cix.co.uk
www.eyetech.co.uk/~eyetech

Voted AUI Amiga Company of the Year 1996/7

EYETECH

Next Day delivery to EC and USA/Canada. Worldwide deliveries in 2-7 days from receipt of faxed order and payment details. (eg SX32 next day to NYC £25.30)

UK m'land next day insured del'y charges: S/w, cables, buffered i/f £3; 2.5" drives, accel's, mem boards £6; manuals £7; 3.5" drives, modems, psu's £9.50; Twrs, CD+ (2day)£10
Ring/fax/email for other delivery costs

UK bank/building society cheques, Visa*, Mastercard*, Switch, Delta, Connect, Postal/ Money orders accepted. * A 3% surcharge is applicable to all credit card orders.
Due to space limitations some of the specs given are indicitive only - please ring/write for further details. Please check prices, specs and availability before ordering. If ordering by post please include a contact phone no. Goods are not supplied on a trial basis. E&OE.
All prices include VAT at 17.5%.
VAT is not applicable to non-EC orders

▲ **Look at the gaseous objects and lens flair in this image if you need convincing as to why they are such a good thing.**



▲ **A torus, yesterday. A torus is a quadratic primitive, and shouldn't be confused with Tori Amos, a singer.**

within a shape, such as a sphere.

How transparent the gas actually appears is defined by its 'turbulence', which is a measure of how much fractal noise is applied. There are many settings to experiment with, and with a little effort you can render some very realistic planet atmospheres, photon torpedoes, galaxies and candle flames.

Lens flare effects are still all the rage, and Aladdin provides these star-shaped flashes of light by cunning manipulation of bitmaps. It may seem a little like cheating, but the approach is flexible – flares can be hidden behind objects, poking through the detail on the top of your star cruiser as it slowly moves across the screen for example.

Fountain objects are really a simple particle system, used if you need a spray of small objects. Like lens flares, they are actually bitmap images. However, their movements can be quite complex: affected by wind or gravity, but are rarely worth the effort and time involved in setting up and rendering.

File support

As well as saving and loading projects in its own native format, Aladdin is capable of loading various file formats. Files saved in the prehistoric VideoScape .geo format may be loaded, as will DEM files from Scenery Animator. LightWave objects may be inserted into your scene, and Aladdin will have a go at understanding EPS Postscript files too – although as this format varies wildly from program to program, platform to platform no promises are made. There is no support for Imagine or Cinema4D objects or scenes. I tried a CDROM of LightWave objects, but only a few would load successfully.

▼ **The texture settings define the bitmap or procedural settings used to cover your objects.**

Brush bitmaps can be stored in JPEG format, good news, as JPEG maintain 24bit colour whilst consuming a fraction of the disk space of their IFF cousins. Bad news is that some I tried appeared as coloured mush. Rendered images can be saved as IFF or IFF24 images, though not JPG format.

Conclusions

Aladdin's documentation takes the form of a 250 page manual and some online help.

The manual is reasonable, although foolishly lacks an index. The online help is supposed to appear in an AmigaGuide window when you press the Help button. It didn't on my system, but I read it by loading into Multiview. The promised details on ARexx were missing, meaning I was unable to test these abilities.

Beneath the fancy displays and standard Amiga windows, there's nothing new or startling – most of the features are present in other rendering software. If you are an existing Aladdin fan, then you'll rush to upgrade to the latest version. Otherwise, it's not worth changing from your existing package. Aladdin is awkward to use, providing a dozen settings when one would suffice.

You can't create a sphere: you create an ellipsoid instead. If you want shadows in your scene, you must select the individual objects which cast them, and those on which they fall. This control is commendable, yet close to overkill.

There are nice touches. Its a pleasant change to get away from Imagine's multiple editor system, and stringent requirements on backdrop image sizes. In many ways, Aladdin offers more control over fundamental settings, and this will make for images which would be otherwise impossible.

In other ways, Imagine still rules – its animation system is clearer, and Aladdin's procedural textures don't get close. So where are the special animation effects? Why omit an explosion or melt effect at this stage in the game?

Aladdin isn't a true ray-tracing program, although you would be hard pressed to find examples which demonstrate this. This means, for example, that you wouldn't be able to create lens effects. Yes, this really isn't an issue, as all the important effects are modelled perfectly well. However, rendering times are nothing special given all this.

To speed things up you need to perform a lot of manual work, such as creating shadow groups. In an ideal world much of this would be automatic. It's good to see support for batch rendering, meaning you can set your Amiga up with lots of work to do whilst you make the tea, have a nap, or even head off on your holidays.

It is a bit of a relief to see software like Aladdin continue with newer versions, but I'm afraid that a tarted-up user interface just isn't enough. We need and deserve more... now more than ever! ■

John Kennedy

ALADDIN 4D V5

Developer: Nova Design

System Requirements: AmigaDOS v2.1 and up, 2Mb of memory Recommended: 68040, 10Mb RAN, large hard disk

Ease of use......70%
Not the best. Unintuitive, over complicated. Steep learning curve.

Performance......80%
Excellent images, and a joy to watch them appear in 24bit colour on a graphics card.

Value for money......80%
A good program to make the most of all that new hardware you're thinking of buying.

OVERALL

Waiting this long for an Aladdin upgrade, we did expect more.

76%

'INTERNET?!
..so what will that do for me?"

Latest News

- News available 24 hours a day, 365 days a year!
- Latest news available 'realtime'
- Thousands of topics, including the latest Amiga news - latest news about Gateway, new Amiga's, OS development!
- Receive news and information direct from companies - press releases, mailing lists, special online offers
- Debate news and rumours via newsgroups

Latest Software

The Aminet contains over 4 gigabytes of software and is updated daily. You can download as much as you want whenever you want!
Download the latest demos of commercial software
Beta-test forthcoming software and download patches
Access the millions of files on the Internet covering a magnitude of different subjects. You like Star Trek? Why not surf some Star Trek web sites and download images, sounds, information?

Access to Unlimited Information

- Millions of web sites to surf all over the world!
- Thousands of different subjects - whatever you like, you will find information, stories, files and more.
- Professional companies online - many companies have web sites where you can read further information about their products and order online (often saving money). You can pay for tickets online, book a restaurant, find the latest weather etc

Play Games Online!

Play multi-player online games 'realtime' such as Foundation and FreeCiv. Test your skills against other players live over the Internet!
Take part in Multi User Dungeons via Telnet - online multi-player adventures.
Download the latest game demos - Internet users are the first to hear and see the latest games developments and even beta-test forthcoming titles! Offer the programmers your ideas!

Contact People, Chat Online!

- Send e-mail to your friends (and organisations) - emails take seconds to arrive anywhere in the world! You can even 'attach' files to your emails! Email can be sent, received and read 24 hours a day, 365 days a year.
- Chat 'realtime' to friends and collegues via the IRC or chat channels for the cost of a local call! Why not have a online conference with relatives from different countries all over the world? Again, all for the price of a local call!

Instant Worldwide Business!

Running a business online can help you find contacts while you converse in your own language (the 'standard' Internet anguage is English).
Immediate or quick decisions. Agreements and contracts can be agreed or altered almost immediately via the 'net.
Wealth of online talent! Need a programmer or artist? Just ask on the Internet and ask for some examples to be emailed!
Sales via the Internet - take orders from your web site!

INTERNET INFORMER

ue 2 Autumn 1997 - available now!

Need more information? Want to connect but are confused about costs, what is needed etc? Issue 2 of our 'Internet Informer' tries to address as many questions as possible regarding the Internet and your Amiga! It is completely free of charge!

For a free Amiga Internet pack call this number now!

(01325) 352260

//ACTIVE

ENTERPRISE

INTERNET SOLUTIONS

gives your AMIGA® the World from £8* per month

In association with

//ACTIVE

01624 677666

Technical Support: 01325 352260
http://www.enterprise.net
Corporate Solutions also available
Terms & conditions available on request

*£9.40 inc.VAT. No online charges

All trademarks recognised.

All You Need For Internet And Comms!

STFax Professional [available October] £29.95

STFax Professional is new commercial fax program for the Amiga containing the sort of advanced features you would find within commercial PC fax software. STFax has been in the shareware for the last few months, and the brand new commercial "professional" version offers even more advanced features plus voice control for voice modems - use your Amiga as a digital answer machine, create a fax on demand service (ideal for small businesses. Allows your customers to contact you at any time and use fax on demand to remotely download fascimile information about your products!) and create advanced voice control scripts. You could even set up your own voice answering service as you find when phoning large companies such as British Airways: "press 1 on your telephone to be put through to an operator, press 2 to...." etc.

- Support for all modem classes (1, 2, 2.0)
- Phonebook (store all your favourite fax numbers)
- Scheduler (store fax messages to be sent at specified times)
- Reports
- ARexx port
- Datatypes support for image conversion
- Printer driver to redirect all print-outs to a fax file (print from Wordworth, Pagestream etc!)
- Viewer for viewing outgoing/incoming fax messages
- Use your Amiga as a digital answer machine etc!
- Advanced voice scripting - create your own voice network or fax on demand service
- Plus many more features



Main Window (showing a fax transmission)



Advanced Voice Script Editor

High Speed Serial Cards from.. £44.95

The Hypercom range of high-speed serial cards offer your Amiga the fastest connection to the Internet, for comms and fax transfers. Available for the Amiga 1200 (these serial cards are placed within the internal clock expansion port - leaving the PCMCIA port and trapdoor free!), A1200 Towers and Zorro-II/III based machines (Zorro version suitable for A1500/2/3/4000 or a A1200 tower). Just lift the keyboard from your Amiga, locate the clock port and then drop in the card - easy. These cards are currently the fastest serial cards available for the Amiga (allowing upto a 460,800bps connection), making the Internet work faster for you! The Hypercom 3/3Z cards also ship with a buffered high speed parallel port which will drastically improve printing speeds on a laser or quality ink jet printer - the manufacturer claims printing can be upto 4 times faster than the standard port. The Hypercom 3/3Z cards contain a 9-pin and standard 25-pin serial ports whereas the Hypercom 1 ships with one 25-pin port. Serial and parallel drivers included. English documention.

Hypercom 3Z

Model	Machine	Specifications	Price
Hypercom1	A1200	1 x 460,800bps highspeed buffered serial port	£44.95
Hypercom3	A1200T	2 x 460,800bps highspeed buffered serial ports 1 x 500K bytes/sec buffered parallel port	£89.95
Hypercom3Z	Zorro-II	2 x 460,800bps highspeed buffered serial ports 1 x 500K bytes/sec buffered parallel port	£79.95

Hypercom 3

Vaporware Software

If you are not interested in purchasing NetConnect you can also buy Vaporware Products individually either by disk or a keyfile sent via e-mail.

	By Disk	Keyfile By EMail
Miami - TCP/IP Stack for the Amiga	£28.00	£26.00
Voyager Next Generation	£22.00	£20.00
Microdot-II	£20.00	£18.00
AmIRC	£20.00	£18.00
AmFTP	£20.00	£18.00
AmTalk	£14.00	£12.00
X-Arc	£14.00	£12.00
AmTelnet	£17.00	£15.00
AmTerm	£17.00	£15.00
AmTelnet + AmTerm Package Deal	£20.00	£18.00
AmigaNCP - Amiga to Psion 3 software	£27.00	£25.00

- 5% Discount when 2-4 Vapor products are bought, 10% Discount for 5+

Computer '97 - *the* Amiga Show!

Come to Cologne on the 14-16th of November! The Amiga event occurs once a year at Cologne in Germany. Last year's show was more than **twice** the size of the World of Amiga with exhibitors such as Haage&Partner, Pro-DAD, PIOS, Villagetronic, Micronik, Eagle, RBM, Titan, Phase5 and many more companies who never appear at a UK Amiga show. Amiga Inc. (the new company based in the States) have already booked a huge stand! See us on the Haage&Partner stand showing NetConnect v2, STFax Professional and Voyager v3 - along with Javascript and other new features. Meet Oliver Wagner, Mathias Mischler and Stefan Stuntz! With the ability to buy more Deutsche Marks than ever you will be able to pick up some real bargains as well as witnessing the latest Amiga technology!

NetConnect v2

NetConnect v2 is even easier to connect to the Internet! Launch the new Wizard GUI, choose your modem, enter a few user details and let the Wizard do all the rest for you! Simple! With version 2 you don't even need to worry about the provider - everything is automatic, everything is point and click! **Amiga Format** concluded about **NetConnect v1** (June 97 issue): "Almost the perfect package for the Amiga Internet user", "If you need to get online, this is the easiest way to do it" and "It's good value for money too - especially the bundle including the 33.6K modem." We have listened to our NetConnect v1 users, noted their comments and added some other new features. NetConnect v2 is available on CD-rom and floppy disk.

10 Commercial Programs within NetConnect v2!

AMITCP v4.6 DIALUP
AmiTCP is a new full TCP stack, enhanced and developed by us and NSDi with full GUI control! Now comes with a Windows95™ style Wizard!

MICRODOT-II
A superb combined email and newsreader within one GUI! Contains all the major features you would expect - MIME attachments, support for POP3/APOP, full Arexx port and more.

AMIRC
Chat online with friends about topics, join conferences, organise mass meetings. The IRC is one of the most addictive elements of the Internet - AmIRC is the best Amiga IRC client.

AMTELNET
Telnet into external computers, maintain directories for your web pages, check the status of your network, play online games.

AMTERM
AmTerm is a communications package which allows you to connect to a BBS, to another user (direct link), transfer files via a serial connection (Amiga<>Amiga, Amiga<>PC etc).

VOYAGER-NG
Voted the best Amiga web browser by CU Amiga - supports SSL for securing ordering, HTTP 1.1 (for the fastest web access), fastmem AGA support (use fast mem to store images) and soon Javascript! etc

AMFTP
AmFTP is the ultimate Amiga FTP client. Download/upload programs from any FTP site, also supports ADT to allow you to search/download files from the Aminet.

AMTALK
A direct chat client for the Amiga. Acts as an online answerphone service for people to leave messages. You can talk directly 'realtime' to friends on the Internet.

NETINFO
NetInfo is a cool tool for analysing the network and the people connected to it - finger your friends to see if they are online, ping servers to find the response speed.

X-ARC
X-Arc is the Amiga's answer to WinZIP™ - automatically decode LHA/LZX/ZIP files, edit the contents of these archives, create your own archives. Full integrates with NetConnect v2!

Free Voyager v3 Upgrade On Release [NetConnect v2 Purchasers Only]

NetConnect v2 is a state-of-the-art Internet package aimed towards Amiga users wanting to connect for the first time (absolute Internet beginners), those who have been connected a few months (novices) and now, due to the keyfile nature of the software, is suitable for advanced Internet users who want to use the modules contained within NetConnect with their existing TCP stack. NetConnect v2 enhancements include:

- **New AmiTCP** - NetConnect v2 users will be the first people to use a version of the new AmiTCP! We have added a number of changes to this new version - the main additions are the new Wizard, MUI based dialler, 'events' control and a brand new redesigned AmiTCP preferences.
- **AmiTCP Wizard** - makes configuring your ISP a doddle. Choose your modem, enter some user details and then the rest of the process is completely automatic! This is true Windows95™ style connectivity! See the example pictures - point and click Internet configuration!
- **New programs** - AmTalk, NetInfo and X-Arc (X-Arc is a brand new WinZIP™ style archive management tool. Downloads lha/lzx/zip files from Voyager/AmFTP/Microdot-II, auto-extracts them into X-Arc's GUI and allows you to control the files.
- **Programs are now keyfile based** (can be used with any TCP stack - Miami etc)
- **Extras pre-configured:** MIME types (CD only), datatypes (CD Only), online help files etc
- **Updated, latest versions of the modules** (Voyager-NG, Microdot-II, AmIRC, AmFTP etc)
- **Printed installation/introduction guide** - install NetConnect quickly and easily
- **Printed manual** - using the Internet and NetConnect
- **Plus many more smaller changes and additions**



Wizard - Modem Analyses



Wizard - Enter Your Information



Wizard - Loginscript Recorder



X-Arc



AmiTCP Wizard

Wizard - Configuration Completed

NetConnect v2 CD [contains many extras: datatypes, MIME types (for www browsing) and much more] **£52.95**
NetConnect v2 Floppy Disks [only contains the core programs & online help documents] **£54.95**
NetConnect v2 Upgrade from v1/v1.1 [registered NetConnect v1/v1.1 users only] **£call!**

• • • • • • • • • • • • • • • • • • • •

ACTIVE

PO Box 151, Darlington, County Durham, DL3 8YT
Tel: 01325 352260
Fax: 01325 482343
E-Mail: active@enterprise.net

DELIVERY CHARGES

S'Ware	- £1.00 for UK delivery - £1.50 for EU delivery - £2.00 World delivery
H'Ware	- £4 for 2-3 day delivery - £6 for next day delivery - £call for Saturday delivery

Make cheques/P.O.'s payable to Active Software and send to the address listed opposite. We can accept credit or debit card orders. For any additional information call us ASAP!

WANT MORE INFORMATION?

We provide an *new* information pack (Internet Informer iss.2) covering NetConnect and the modules (Voyager, MD-2 etc), the modems we offer, connectivity discounts and a set of frequentely asked questions and answers. Internet Informer iss.2 also gives information about the Internet, why you should connect etc!

You can also access the NetConnect homepage for additional information, latest news and to download a time-limited demo version of the software:

http://amigaworld.com/netconnect

Latest Technology Modems

K56Flex modems are here! Download software and web pages upto **twice** the speed of a 28.8 modem. 56k modems will operate at 33.6K speeds for uploading but you can cut your phone bills drastically when using the 56K technology! Isn't it about time you upgraded that 14.4 or 28.8 modem? For further information about the new K56Flex (Rockwell developed) technology contact us!

We only supply quality **branded** modems (Dynalink UK Ltd or Diamond SupraExpress), which may cost slightly more than their unbranded competitors, but they ship with a lifetime warranty, the knowledge that a UK company offers support/information and you are buying a modem with quality (Rockwell based) components.

K56Flex modems need to connect to another K56Flex modem in order to use 56K technology (make sure your provider supports K56Flex technology). Call for further technical details.

£79.95

33.6k External Data/Fax/Voice

- Quality branded Supra modem
- 33600 bps DATA/FAX/VOICE modem - true v34. Throughput to 115,200 BPS via V.42 bis data compression
- Group 1, 2 & 3 send/receive FAX (14.4)
- Voice Commands - DSVD upgradeable (by software)
- V.80 (video conferencing) capable
- Call Discrimination
- Fax on demand
- Caller ID and Distinctive Ring enabled
- Simultaneous voice and data (S.V.D.)
- Upgradable ROM chip
- Includes headphones/microphones - for voice control
- Lifetime warranty
- Serial cable included (Dynalink 25/9pin, Supra 25pin only)

56k External Data/Fax/Voice

Specs. as the 33.6k external with some general information:

The SupraExpress 56 Sp makes sophisticated communications more affordable and easier to use than ever before. With full-duplex speakerphone and voice mail you can now use a single phone line for all your communications - voice, fax, and file transfer. What's more, with advanced messaging capabilities, the SupraExpress 56 Sp makes it easy to keep in touch even when you're away. An ideal solution for home or small office communications.

£119.95

£149.95

- 56/64/112/128 Kbps connections
- Voice/data on both B-channels
- Caller ID enabled (where available)
- AutoISDN® application
- Analog Support: Rings up to 3 telephones
- User-assigned distinctive ringing
- Multilink-PPP
- Flex Channel Bandwidth-on-demand
- PAP/CHAP authentication

External ISDN

Tired of waiting for your modem to download a favourite Web page or retrieve large files? Imagine surfing the Net at 128,000 bps with the Supra NetCommander ISDN digital modem, or nearly five times the speed of a 33.6 Kbps analog modem. With an analogue port to ring standard telephones, fax machines or modems, Supra NetCommander has been designed to be the easiest and most cost-effective route to high-speed access to the Internet and remote LANs.

ISDN works on your standard Amiga in conjunction with a Hypercom or other serial card and AmiTCP, NetConnect or Miami. You also need an ISDN line installed to use an ISDN modem **Please note**: ISDN modems cannot be used as fax machines, you would need a cheap analogue modem to handle this.

Choosing Your Modem

The graph below should help you choose the modem for your needs. For the price, a 33.6K modem is best value for money as a serial card is not absolutely necessary. A 56K modem is a good option for those wanting maximum speed but have a limited budget (the red bar shows the maximum connection speed - as most '56K' modems connect around 44-48K the extended bar shows the 'realistic' connection). You need a serial card with a 56K modem. For the true 'net surfer, ISDN is the ultimate option - solid 64K connections, constant speeds but higher running costs. Note that transfer rates can vary depending on factors such as line quality. Call for further information!



*Time (shown in minutes) taken - in ideal conditions - to download a 1MB file by various modems.

Various Modem Pack Options

Various money saving packs are available. These are all based on either the 33.6k, 56k or ISDN modem plus a a collection of extras. Call us for other pack options if you have your own pack idea!

CODE	PACK CONTENTS	PRICES £
PK01	33.6 Modem & STFax	£ 89.95
PK02	33.6 Modem & NetConnect	£109.95
PK03	33.6 Modem & NetConnect & STFax	£119.95
PK04	33.6 Modem & NetConnect & Hypercom1 & STFax	£149.95
PK05	33.6 Modem & NetConnect & Hypercom3Z & STFax	£159.95

ADD £30 for a 56k Modem (instead of the 33.6k model)
ADD £55 for an ISDN Modem (instead of the 33.6k model)

- All packs come with one month free connection to a major Internet Service Provider
- Other options may be available - call
- Choose between the CD or Floppy disk version of NetConnect with your modem pack
- STFax Professional will be despatched on release

CARE QUALITY & SERVICE

CARE QUALITY INKS

QUALITY INK JET & BUBBLE JET REFILLS

Our refills use only top quality inks. You buy direct from us hence our superb quality at sensible prices.
Black refills for HP Deskjet 500, 510, 550, 500C, 550C, 560C, 660C, 850C
CANON BC-01, BJ10E/EX/SX, BC-02, BJ200, BJ130, BJ300, BJ330
EPSON STYLUS 800, 1000. CITIZEN PROJET. OLIVETTI JP150, 250, 350, 360.
6 refill (3 on high capacity cartidges) kit 120mL pure black. £16.99
CANON BJC600, BJC4000/4100 20 refills pure black 120mL £16.99
EPSON STYLUS 4 refills 120mL pure black £16.99

TRICOLOUR REFILL KITS £24.99
HP DESKJET RANGE, CANON BJC210, 600 / 4000
EPSON STYLUS COLOUR / II / IIs / 500
60ml EACH OF YELLOW, MAGENTA, CYAN
Up to 10 refills each colour
"Print Head Recovery Fluid" for unblocking nozzles NEW LARGE SIZE NEW LOW PRICE! £6.99
Important: Please state type when ordering

Colour Printer ribbons & reloads

To reload a ribbon is easy, just remove the top, take out the old ribbon & reload it with a new one.	complete ribbon	one reload	five reloads
Citizen Swift/ABC/240 etc	£11.95	£6.99	£29.95
Panasonic KXP2123/2124/2180	£9.99	£6.99	£29.95
Panasonic KXP2135	£9.99	£6.99	£29.95
Star LC200 9pin	£9.99	£5.99	£29.95
Star LC24-10/20/200	£9.99	£6.99	£29.95
Star LC24-30/LC240	£8.99	£4.95	£19.99
Seikosha SL95	£14.95	£6.99	£29.95

Special Re-Ink

For Panasonic 1080/81, 1123/24, 2123/80, 2135, Star LC200 9pin, Epson LQ100/150, Oki 182 to 390 range. Black bottle will re-ink 100+ ribbons. £9.95

Black Printer Ribbon Reloads

Citizen Swift/ABC/120D 5 black reloads £9.99
Star LC10/20/100 5 black reloads £4.99
Star LC24 range 5 black reloads £9.99
Seikosha 1900/2400/SL95 5 black £9.99
Epson FX80/LQ400 to 800 range 5 black £11.99
Star LC24-30/LC240 5 black reloads £14.99

T-shirt printing is simple, just print onto normal paper & iron on. One ribbon gives lots of prints. We can also supply ribbons in many colours T-shirt and normal ink.

T-Shirt printing ribbons

4 col Citizen Swift/ABC/240 £19.99
4 col Panasonic 2123 £24.99
4 col Panasonic 2135 £19.99
4 colour Star LC200 24pin £19.99
reloads for above £9.99
4 colour Star LC200 9pin £12.99
4 colour Star LC10 £10.99
reloads for above £7.99
Black Citizen Swift/ABC/120D £9.99
Black Star LC10 £9.99
Black Star LC200 9pin £9.99
Black Pan KXP1080/81 £9.99
Black Pan KXP1123/24 £9.99

Prices include VAT & postage. To order send cheques/POs payable to:

CARE PRODUCTS
Dept CUA, 15 Holland Gardens, Watford, WD2 6JN
or use Visa/Mastercard or Education order.
Tel order line 01923 894064

CARE QUALITY INKS

Fax ORDER LINE 01923 672102

LOWEST PRICED TOP QUALITY RIBBONS, INKJETS, TONERS & DISKS

Printer Ribbons

BLACK	1off	2+	5+	10+
Amstrad DMP 2000/3000	2.80	2.65	2.45	2.25
Amstrad DMP 4000	3.66	3.51	3.31	3.11
Amstrad PCW8256/8512/LQ3500	2.85	2.70	2.50	2.30
Brother M1009/1024/1109/1209	3.90	3.75	3.55	3.35
Citizen 120D/LSP10/Swift 24/9	2.85	2.70	2.50	2.30
Commodore MPS 1220/1230	4.50	4.35	4.15	3.95
Epson LQ100	4.10	3.95	3.75	3.55
Epson LQ200/400/500/800/850	3.45	3.30	3.10	2.90
Epson FX/MX/RX80/FX/LX800	2.90	2.75	2.55	2.35
Epson LX80/86/90	2.12	1.97	1.77	1.67
Mannesman Tally 80/81	3.90	3.75	3.55	3.35
NEC Pinwriter P2200	3.03	2.88	2.68	2.48
OKI ML182/183/192/193/195	3.17	3.02	2.82	2.62

BLACK	1off	2+	5+	10+
Panasonic KXP 1123/1124/1140	3.46	3.31	3.11	2.91
Panasonic KXP 1080/1180/90/1592	2.89	2.74	2.54	2.34
Panasonic KXP 2123/2180	4.95	4.80	4.60	4.40
Seikosha SL90/92/95	5.70	5.55	5.35	5.15
Star LC10/20/100	2.29	2.14	1.94	1.84
Star LC200	3.00	2.85	2.65	2.45
Star LC24-10/200	2.86	2.71	2.51	2.31
COLOUR	**1off**	**2+**	**5+**	**10+**
Citizen Swift 24	11.95	11.80	11.60	11.20
Panasonic KXP2123/2180	10.63	10.48	10.28	9.88
Star LC10/20/100	6.00	5.85	5.65	5.25
Star LC200	9.78	9.63	9.43	9.03
Star LC24-10/200	9.63	9.48	9.28	8.88

These are just a small selection of our Ribbons - Ring for those not listed

Ring us and *WE WILL BEAT* all other Ribbon prices

3.5" Disks & Disk Boxes

	Bulk		Branded	
	DD	HD	DD	HD
10 Disks	£5	£6	£6	£9
25 Disks	£10	£11	-	-
50 Disks	£16	£18	£24	£36
100 Disks	£29	£33	£41	£66
250 Disks	£65	£76	£96	£153
500 Disks	£125	£148	£187	£288

All Disks Certified 100% *ERROR FREE & INCLUDE FREE* Labels

Lockable 3.5" Boxes/Draws	
100 Capacity Box	5.99
50 Capacity Bax	4.99
240 Capacity Draw	18.99

Other Boxes & Wallets	
3.5" 10 Cap. Boxes	1.50
3.5" 6 Cap. Wallets	3.99
Lockable CD Drawers	
30 Capacity	16.99

Various Dust Covers available from £3.99

Inkjet / Bubblejet Cartridges

	1 off	2+	5+
Canon BJ 10/10ex/20 Cartridge	16.30	16.10	15.90
Canon BJC 4000 Black Refill	7.00	6.80	6.60
Canon BJC 4000 Colour Rfill	11.00	10.80	10.60
Commodore MPS1270 Cartridge	10.80	10.60	10.40
HP D'Jet 500 Series Black Cartridge	21.00	20.80	20.60
HP D'Jet 500 Series Tri-Colour Cart.	22.50	22.30	22.10
HP Thinkjet/Quietjet Cartridge	10.80	10.60	10.40

Inkjet / Bubblejet Refill Kits

Apple Stylewriter	8.50 for 2 x 20ml Refills
Canon BJ 10/10ex/20	8.50 for 2 x 20ml Refills
Canon BJ 200/230	8.50 for 2 x 20ml Refills
Epson Stylus 400/800/1000	8.50 for 2 x 20ml Refills
Epson Stylus Colour Black	8.50 for 2 x 12ml Refills
Epson Stylus Colour Colour	10.50 for 9ml of each Col
HP D'Jet 500 Series Black	11.00 for 2 x 40ml Refills
HP D'Jet 500 Series Tri-Colour	12.00 for 12ml of each Col.
Star SJ48	8.50 for 2 x 20ml Refills

Ring For Cartridges & Refills not listed

Normal UK Delivery £2.00, Next Day £7.50
Prices INCLUDE VAT (@17.5%)

01543 250377 01543 250377

Ring us or send cheques to:
Owl Associates, Dept 547, Owl House,
5 The Brambles, Lichfield, Staffs WS14 9SE
Official Government & Educational orders welcome

E& OE

Hydra A1200 Ethernet

■ Price: £149 ■ Supplier: HiQ Ltd ✆ 01525 211327

Ethernet has been sorely neglected on the Amiga, the main reason being the lack of an economical Ethernet adaptor for A1200s. Big box Amigas have been catered for with overpriced Zorro cards and for a period, Interworks created an A1200 PCMCIA unit but it's now out of production.

If one wants to network several computers with cheap cable and fast transfer rates, Ethernet is the ideal solution. At a data-rate of 10 megabits, it's theoretically capable of shifting more than a megabyte per second. It turns out that the creators of one of the Amiga's first big-box Amiga ethernet cards, Hydra systems, have finally produced a new PCMCIA Ethernet for the A 600 and 1200.

It's not just a problem with drivers, apparently the Amiga PCMCIA implementation is questionable and for this reason Hydra have housed an IBM network card in a larger box which has certain electronics to 'clean up the PCMCIA signals', so Hydra say.

The box plugs into the side of the 1200 and an adaptor plugs into the rear which provides a connector for either coaxial or twisted pair based Ethernet. The former would be most common for smaller networks but each unit must be in a chain. Like a SCSI bus, the devices on the end of the chain need to use a terminator with a T-piece. If using the twisted pair options, the extra expense of Ethernet hubs comes in.

The software provided is basic but all that's really required is a SANA-II driver, the Amiga's standard driver for network hardware. Programs such as AmiTCP, Miami and Envoy will use this device to communicate with the adaptor. I got the whole shebang working with Miami in seconds. A raw file transfer via FTP to an FTP server on a local machine yielded around 350K/s which other tests also backed up as being the maximum transfer rate that the Hydra unit is capable of.

I used the Hydra with Envoy to file share with other Amigas, managing 320K/s. I'd used Miami successfully to access the Internet via EMAP's firewall and via a gateway PC also. The Siamese RTG system also now runs fully over TCP/IP and worked quickly and faultlessly with the Hydra.

Despite small reservations on 'cleaning up' the Amiga PCMCIA port, I would still highly recommend this solid performing unit. ■

Mat Bettinson

PCMCIA Ethernet with Amiga?

A little before the Hydra A1200 PCMCIA Ethernet adaptor was released, news of a generic PCMCIA Ethernet card driver appeared. The driver is known to work with a particular brand and model of standard PCMCIA card. The driver can be found on the Aminet in the hard/drivr/cnetdevice.lha path or on the cover CD. If you test with a particular brand and find that all works well, please drop us a line and we'll list them with prices and suppliers in the next issue.

System Requirements:
Amiga with PCMCIA port and Ethernet cables/network

OVERALL
Good quality Amiga PCMCIA Ethernet at last
84%

Envoy 2.0

■ Price: £20.00 ■ Supplier: LH Publishing ✆ 01908 370 230

It's one thing getting a TCP/IP connection up and running between two machines via Ethernet, it's quite another to do something useful with it.

Common applications of networking are Internet access and cross-machine file and printer access. The former is most easily accomplished right now by using a PC as a gateway to the Internet and then each networked Amiga gets to the net via the PC.

The next version of Miami is said to contain this function for the Amiga and it's also possible to do something like this with AmiTCP though you need to be a rocket scientist to get it working. That leaves file and printer sharing.

Normally this is happy to work on the back of a TCP/IP stack being used over Ethernet but there is no Amiga native file-sharing service that will work in this manner. There is, however, the long running Envoy system which was originally developed by Commodore and then updated to version 2.0 by IAM. Envoy will run instead of or as well as, a proper TCP/IP stack. It's a proper file and printer sharing package so that drives and printers on one machine can be accessed on another. It also has a full range of security options so that users can be given access to only particular drives/directories and allowed to perform only some operations, such as read-only.

Envoy also handles remote printing and reconnection of the 'exported' drives if a machine crashes and restarts. This feature has been improved dramatically over the older Commodore Envoy versions as shipped with the Villagetronic Ariadne Zorro Ethernet card.

There's no product on the Amiga that does what Envoy does and yet Envoy is an extremely good networking suite. The new price is a complete steal and anyone considering proper filesharing between Amigas should consider Envoy. Envoy will use practically any SANA-II driver, so anything from a special 'MagPLIP' parallel cable (see CD-ROM) to Ethernet or even serial links can be used with Envoy.

It's a shame that Envoy is Amiga to Amiga only and that to fileshare with PCs, the headache of getting Samba (see CD-ROM again) installed is still necessary.

Still, if you are in the situation where Amigas need networking, Envoy is the complete business and you shouldn't think twice about picking it up. ■

Mat Bettinson

System Requirements:
Any Amiga with OS 2.04 and a network with SANA-II driver

OVERALL
The Amigas definitive networking software
92%

OxyPatcher

■ **Price: DM39** ■ **Supplier: Oxyron ✆ +49 (0)5465/ 99 23 (Available by E-mail only outside of Germany)**

Jason Compton takes a look at some special software that promises to speed up 68060 based accelerators. Oxpatcher is go!

An '040 or '060 system is better than any '020 or '030 system you could put together.

One of the reasons is that the FPU (floating point unit) is built right in to the main processor. This is very, very important if you want to do graphics work, particularly 3D, with any sort of speed.

To incorporate the FPU (the Motorola 68882) into the '040 and the '060, some *shortcuts* were taken. An '040 does not actually have a full 68882 instruction set – it has a very fast internal FPU unit which recreates most of the functions of the 68882 while others are emulated with the help of the '68040.library' that comes with Workbench.

The '040 will handle those FPU functions it does support very quickly indeed, using less clock cycles to perform each function, but those it does not can be a major bottleneck. The '060 is quite a similar story, butanother layer removed – it is even faster but has yet more instructions that need to be emulated.

Incomplete 68882

So while an '040-based system will beat an '030+FPU system in rendering, and an '060-based system will beat an '040-based system, the '040 and '060s are capable of doing so much more. The problem is that the vast majority of Amiga software is making calls to old 68882 instructions, instead of using only the remaining FPU instructions.

Phase 5 was clever enough to recognise that customers of their 060 boards expected a high level of performance, so they created the CyberPatcher. CyberPatcher sits in the background of a Phase5 060-equipped Amiga and can speed up applications which access the FPU by 'patching' the program to use existing 060 FPU instructions. This results in significant speed gains and an advantage over other 060 implementations, like those on the Apollo cards.

This has been limited to Phase 5 cards until Oxyron released the OxyPatcher, intended to work on all Amiga 040 and 060s.



◀ **What this may lack in cinematography, it makes up for by being a good benchmark.**

Using OxyPatcher

OxyPatcher requires a special program to be run as the first line in your startup-sequence.

You can configure OxyPatcher to run automatically on startup, or you can call it at any point during your session. There is absolutely no speed advantage to the OS itself but unlike CyberPatcher, OxyPatcher comes with a configuration and status window which you can call from Workbench. It lists the FPU instructions currently being patched (by whatever program you are running or have run that accesses them), and a few user-configurable fields.

OxyPatcher should then be more or less transparent, although the documentation indicates that if you are using your native Amiga display rather than a graphics card, you may notice that the screen flashes during patched instructions. I didn't encounter this during tests and also didn't encounter any software that OxyPatcher would not run.

However, its patch program seems to be incompatible with the patch program for the new Mac emulator Fusion. Shapeshifter's patch program functions properly and SS can still be run without difficulty.

Non-polished patcher

OxyPatcher is not the most polished of programs. The GUI and online documentation (which is the only kind) features broken English, often missing essential points.

It also provides a set of speed tests which, if not actually cooked books, do seem to have been staged for Oxypatcher's benefit, promising 3-5X or more speedup on your 3D work.

For installed users of Phase5 060 boards, OxyPatcher doesn't offer a whole lot. For the rest of the 040/060 world, however, OxyPatcher offers a new way to exploit your Amiga's power. ■

Jason Compton

Test Interpretation

Benchmarking these patchers is best done with real-world 3D rendering performance. Three tests were conducted – two in Cinema4D 4, one in Imagine 4 .

Test 1: C4D Raytrace, 800x600, DS9+Enterprise	
Unpatched:	954 sec.
OxyPatched:	513 sec.
CyberPatch:	493 sec.

Test 2: C4D Raytrace, 800x600, Staircase example file	
Unpatched:	281 sec.
OxyPatched:	168 sec.
CyberPatch:	161 sec.

Test 3: Imagine raytrace, 640x400 render	
Unpatched:	344 sec.
Oxypatched:	325 sec.
CyberPatch:	342 sec.

If you're a Cinema4D user, these numbers should make your eyes boggle. While CyberPatcher does have a slight edge here, OxyPatcher still offers massive gains (nearly a 2X speedup!) .

The Imagine results are curious, notably in that they do not match up with the results we found using this on the Apollo 1260/66 board tested last month. Using smaller renders we got the results:

Unpatched:	126 sec.
Oxypatched:	27 sec.

Clearly the results from last month are vastly better, and to be honest we aren't sure exactly why. Specifics of the render, external patches and the version of the '040 library used may have something to do with it. However the lesson is clear, if you have no patcher yet, you're crippling your processor for this kind of work. Oh, and it makes TFX go like the clappers.

OXYPATCHER

Developer: Oxyron

System Requirements:

An Amiga with 68060 accelerator

Ease of use	75%
The patcher and the configuration aren't friendly.	
Performance	90%
It will speed up the 3D apps you're likely to be using.	
Value for money	95%
The alternative is buying a phase 5 060 board. Good deal.	

OVERALL

OxyPatcher makes the fastest go faster. Fast is good.

90%

AMIGA® REPAIRS

COMPUTERS AND MONITORS

WHILE-U-WAIT!!!

Analogic is a recommended repair centre in the UK by Amiga Technologies

Attention Dealers

Ring/Fax Now for best trade prices and terms on Repairs, Spares, Floppy Drives, Hard Drives, CD Rom Drives and Memory Upgrades.

Please call for a better than price match deal

- FAST TURNAROUND
- 120 DAYS WARRANTY ON ALL REPAIRS
- £10.00 EXTRA CHARGE FOR WHILE-U-WAIT SERVICE
- PICK UP & DELIVERY CHARGES£7·05 EACH WAY
- A1500/A2000/A4000……£QUOTATION

A500, A500+ & A600 £39·95

A1200 £49·95

INTERNAL FLOPPY DRIVES

A500/A500+/A600/A1200 …….£24·95

MEMORY UPGRADES

A500	Upgrade to 1 Meg	£13·95
A500+	Upgrade to 2 Meg	£19·95
A600	Upgrade to 2 Meg	£19·95

UNBEATABLE PRICES

Please call for latest best price

	0Mb	4Mb	8Mb
A1200	£39·00	£49·00	£65·00

APOLLO ACCELERATORS

1230 Lite	£69·95
1230/50	£119·95
1240/25	£139·95
1240/40	£199·95
1260/50	£279·95

Heavy discount on SIMM prices when bought with an accelerator

4Mb	£15·00
8Mb	£29·00
16Mb	£59·00
32Mb	£120·00

SCSI CD-ROMS

Quad Speed SCSI + Squirrel…….£139.00

IDE CD-ROMS

Hitachi 16 max……£79.95

MODEMS

BABT APPROVED + NCOMM SOFTWARE + CABLES

33.6k….£79.00

LOLA GENLOCKS

L1500………£169·95

L2000S……£349·95

SIMPLY THE BEST AFTER-SALES SERVICE

GUARANTEED SAME DAY DESPATCH (Subject to availability)

NEW

TRADE IN YOUR AMIGA FOR A PC

NEW

WE BUY DEAD OR ALIVE A1200 AND A4000

RING US FOR A REASONABLE OFFER FOR YOUR A1200/A4000 COMPUTER OR JUST MOTHERBOARD IN ANY CONDITION

AMIGA COMPUTERS

A500 With PSU + Mouse + Mat	£79.95
A500+ With PSU + Mouse + Mat	£89.95
A600 With PSU + Mouse + Mat	£99.95
A1200 Magic Pack	£249.95
A1200 With 80MB Hard Drive	£279.95
A1200 With 170MB Hard Drive	£319.95
A1200 With 810MB Hard Drive	£379.95
A1200 With 2.1gig Hard Drive	£469.95
A2000 (Available)	Call
A4000 (Available)	Call

- * **HEAVY DISCOUNTS** ON MEMORY UPGRADES AND ACCELERATORS WHEN BOUGHT WITH A1200
- * **EXTENDED WARRANTY** UP TO 5 YEARS AVAILABLE ON ALL A1200 COMPUTERS

2·5" IDE HARD DRIVES

All hard drives are preformatted, partitioned with Work Bench loaded and include cable & software

60MB	£55.00	540MB	£129.00
80MB	£65.00	810MB	£159.00
170MB	£69.00	1.4 gig	£199.00
260MB	£86.00	2.1 gig	£299.00
420MB	£120.00		

2.5" IDE Cable & Software (If bought separately)…………£9.95

3·5" IDE HARD DRIVES

2.1 gig …………£159.00 4.2 gig …………£249.00

Please call for other capacities

CHIPS ✤ SPARES ✤ ACCESSORIES

ROM 2.04	£18.00	A600/A1200 KEYBOARD	£29.95
ROM 2.05	£19.00	SCART LEAD	£14.95
A500/A500+ KEYBOARD	£29.95	MONITOR CABLE	£14.95
AMIGA MOUSE + MAT	£14.95	SQUIRREL INTERFACE	£50.00
A500/A600/A1200 CIA	£12.00	SURF SQUIRREL	£89.00
		A520 MODULATOR	£18.00

A500/A600/A1200/POWER SUPPLY	£24.95
A1500/A2000/A3000/A4000 POWER SUPPLY	CALL

* All chips are available ex-stock
* Please call for any chip or spare not listed here

ANALOGIC

Analogic Computers (UK) Ltd
Unit 6, Ashway Centre, Elm Crescent,
Kingston-upon-Thames, Surrey KT2 6HH

Open Mon-Fri 8·00am-5·30pm, Sat 9·00am-5·00pm Fax: 0181 541 4671

Tel: 0181 546 9575

★ All prices include VAT ★ All prices & specifications subject to change without notice ★ Fixed charge for repair does not include disk drive/keyboard ★ We reserve the right to refuse any repair ★ P&P charges £3·50 by Royal Mail or £7·05 for courier ★ Please allow 5 working days for cheque clearance ★ All sales/repairs are only as per our terms and conditions, copy available on request.

VisualFX

AMIGA SUPERSTAR

■ Price: US$199 ■ Supplier: Visual Inspirations Inc. ✆ +1-813 935-6410

VisualFX turns ImageFX into an instant eye-popping effects machine, for both single pictures and frame sequences, by just answering a few questions.

▲ VFXIFX's magnifying glass effect is very convincing and takes seconds to generate.

Sometimes, software can seem to be almost magical in the things it can do. Visual Inspirations VisualFX for ImageFX is one of those times.

Nova Design's ImageFX is, perhaps, one of the most capable graphics manipulation packages ever released for the Amiga. It rivals Wintel and Mac products many times its price, and does many things they can only dream of doing.

But all this power comes at the price of learning how to use it. While the simple stuff (image format conversion, cropping, scaling, applying some filters, changing image balance, adding text, etc.) is easy, few people spend enough time learning what the program is capable of, or don't have a large enough knowledge of ARexx to be able to automate effects and processing over a series of images.

With VFXIFX, long time Amiga developer Jeff White's company, Merlin Software, has delivered perhaps the ultimate 'plug-in' for ImageFX. Using it, I've been able to achieve effects that are at once so beautiful, and so easy to do, it startled me.

Canine capers

Jeff is a master of ARexx; that much is obvious. His scripts make ImageFX rear up on its hind legs and bark like a dog. And yet VFXIFX goes way beyond just a pile of scripts. VFXIFX is delivered on a CD and a floppy disk. The CD alone can serve as a demo. The floppy contains ingredients to install everything to your hard drive and make it work. Naturally, you must also own ImageFX, a hard drive, and plenty of RAM would be extremely useful. AGA and graphics cards are not required. Nor is a Video Toaster or Toaster Flyer, although VFXIFX is also designed to work directly with them. Thus it's fine for PAL use in markets where Toasters never sold.

Running VFXIFX also launches ImageFX, and presents an attractive interface (in your choice of 4, 16, or 256 colours) with thumbnails of the transitional effects it can perform. Click a thumbnail and see a description and an animation of that transition play. You don't have to try to remember "what does #12 do?" because there it is, both in words and pictures.

A kind of magic

Once you've decided on the effect you want to use, click the [set up effect] button and VFX will open requesters right on ImageFX's screen, prompting you with questions and file requesters and waiting for your input. Once you've told it what you want to do, and on what images to do it, VFX has stored the effect, ready for you to choose another (for unattended batch processing) or click the [render effect] button, and just sit back and watch it happen like magic. (It's probably not a coincidence that VFXIFX's icon is a picture of a magic wand tapping an eye!) Your processed frames are saved out of ImageFX in your chosen format, and after that's done you can compress them into animations, record them to single frame recorders, or whatever else is your goal.



#2 Bubbles

Image-A slowly fades into Image-B while bubbles float by the screen

And what effects they are! How about a glowing flame eating it away from the centre like the titles of the old 'Bonanza' series, over the shoulder 'PIP' shots, animated bubbles for an underwater sequence, swirling, twirling, tearing, flipping sequences, tons of compositing options, scrolling backgrounds, letterbox overlays, moving brushes, rack and focus, camera zooms, moving spot lights, travelling glints, animated lens flares, moving magnifying glass... plus a whole load more.

VFXIFX's rendering choices are like opening a candy box – you can't decide which one you want to try first. This is truly a superlative add-on for ImageFX from a long-time Amiga developer whose products just keep getting better and better. ■

Harv Lazer

VISUALFX
Developer: Merlin Graphics

System Requirements: ImageFX by Nova Design, ARexx and 20Mb HD space, AGA or Graphics card recommended.

Ease of use........98%
Stupendous, professional effects with no ARexx knowledge required.

Performance........95%
The faster your Amiga, the faster the results. An 030 will get the job done. An 060 makes it very entertaining indeed!

Value for money........95%
A unique product. This is the kind of thing computers were made for.

OVERALL
This is the ultimate plug-in for ImageFX so far. Fantastic.

96%

Epson Stylus Photo

■ **Price: £380** ■ **Supplier: Epson UK ✆ 0800 289622 http:// www.epson.co.uk**

It may look just like any other of their printers, but this time Epson appear to have mastered the art of creating life-like reproductions.

Over the years, printer manufacturers have strived to create a desktop printer that can produce true photographic results. Until recently, you either had to pay tens of thousands of pounds for such an animal or buy a dye sublimation printer. Epson UK have changed all that by coming out with the Stylus Photo, one of a number of Photo Studio products including digital cameras and slide scanners.

The Stylus Photo looks very similar to other Epson Stylus printers but instead of using four colours it uses six. The two additional inks, Light Cyan and Light Magenta, are to improve highlight rendering when printing photographs and is especially useful when dealing with subtle areas like flesh tones. I first tested the Stylus Photo from a PC along with my own Stylus 1520. The Stylus Photo certainly lived up to the hype, instead of seeing the dots of colour visible in flesh tones from the Stylus 1520, the output from the Stylus Photo was almost perfect with little or no discernible dithering.

The Amiga question

But, will it work with our favourite computer? Well, after attaching one to my A1200 for a short while, the answer is yes but there are some points worth noting. First, I currently have to use the Stylus 500/Stylus II driver to output to the Stylus Photo. This worked with both TurboPrint 5 and Studio II. I found that the subtle shading I was able to get when driving the printer from the PC using a dedicated Stylus Photo driver, wasn't reproduced when using the Amiga and TurboPrint 5 – the better of the two packages I tried. The quality however should improve when IrseeSoft finish creating a dedicated driver for the Stylus Photo, something that shouldn't take too long as they now have a Stylus Photo to work with. I'm not entirely sure what's happening with Studio II on this front or EnPrint for that matter.

That said, the output on the Amiga isn't as bad as perhaps I'm making out. In fact, for many, the output is stunning, especially on the glossy paper. What's missing is the subtle shading the extra inks bring and a dedicated Amiga driver to take advantage of them. Importantly this driver situation was the same when I reviewed the Epson 600, but it wasn't long before a driver appeared for it with the popular TurboPrint 5.

Dedication

To conclude, the Epson Stylus Photo is brilliant if you are going to be printing photographs quite a lot, because, with a dedicated driver it performs better than any other ink-jet printer this side of £500 that I've seen. Those of us using the Amiga will however have to wait a short while for that dedicated printer driver, but I'm sure the delay will be worth it.

The Stylus Photo certainly proves that despite a maximum resolution of 720dpi, it can produce better quality than its higher resolution cousins but this comes at a price. I expect those five colour ink cartridges will also be a little more expensive to replace than their three colour equivalents.

Personally, if my budget weren't a problem I'd go for the Stylus Photo. You really have to see its photo quality to believe it. In many respects, it produces images *better* than real photos which can often be blurred. Yet another winner from Epson. ■

Larry Hickmott

Specs in brief

- 6 Colour Ink-Jet Printer (Black, Cyan, Light Cyan, Magenta, Light Magenta, Yellow)
- MicroPiezo technology with Quick-Dry Inks
- Resolution - 720 x 720 dpi
- Interfaces x 2 (Parallel & Macintosh)
- Input Buffer - 64Kb
- Print Margins - 3mm Top, Left & Right. 14mm Bottom
- Ink Cartridges - 1 Black (SO20093), 1 Colour (S020110
- 6x4 Photo Paper (S041134)
- Weight - 5.2Kg
- Dimensions - 168mm x 429mm x 275mm
- Paper Sizes - A4, A5, Letter, Legal, B5, 6x4, User defined
- Paper Weight - 64 to 90 gsm.
- Amiga Printer Drivers - Stylus 500 emulation in place of dedicated driver
- Print Heads - Black x 32 Nozzles, Colour (x5) 32 nozzles
- Warranty - 1 year Return to Base (Optional 3 year warranty available)





Print Dimension
W 4.0643 H 6.0004
X 1.2060 Y 0.8292
Page Dimension
W 8.0000 H 11.1000
X 0.0000 Y 0.0000
Ruler Dimension
X 15.0000 Y 11.5875
Paper Dimension
W 8.0000 H 11.1000
Density (dpi) 7 720:720
Col
Port
Dit BlueNoise 30%
Color M. System ✓
Copies 1
Start Page 1

◀ **Far right: Despite having drivers for the latest Epson Stylus printers such as the 400 and 600, TurboPrint 5 does not have one for the Stylus Photo.**

EPSON STYLUS PHOTO

Developer: Vaporware

System Requirements:

Print Enhancement Package, WB2 or later.

Ease of use 91%

Printer couldn't be easier to operate although configuring a printer driver depends on the package chosen.

Performance 90%

Print speed depends on how quick your Amiga is. Quality is superb with a dedicated driver which shouldn't be too long in coming for us with Amigas.

Value for money 88%

Does seem pricey, but I'm told prices are being reduced.

OVERALL

Does a good job of photographs but lacks a proper Amiga driver.

89%

Siamese
SYSTEMS

Siamese PC for A1200 only £799.95 inc Vat

The Ultimate A1200 Upgrade from HiQ

Will run with Amiga 2000/3000/4000 with Kick/WB3+ but needs Zorro bus Ethernet upgrade £49.95
Amiga needs hard drive and 4mb ram.

A1200, monitor, camera and Lisa not included. Case design is diferent.

Siamese PC with RTG v2.1 features !!

- *Use PC graphics card as an **Amiga RTG graphics** display. Each Intuition friendly program opens in a seperate PC Window upto 256 colours &1024 x 768 (higher with 4mb graphics upgrade). You can also have **24 bit backdrops & Video** on workbench.*
- *Siamese RTG uses Zero Amiga ram for display in any resolution.*
- *Amiga can use the **16bit CD quality sound** card in the PC, including Wave sound generator.*
- ***High Speed PCMCIA Ethernet** card, using TCP/IP to transfer Files, graphics, sound, user input etc.*
- ***Use cheap PC drives** from the Amiga including CDrom, Hard Disk, HDD floppies, Removable drives, Tape streamers at very high speed.*
- *Use any modem (optional) through TCP/IP, use IBrowse, Netscape 4, AmiFTP, AmiIRC all at the same time and through one Internet connection.*
- *Runs all Windows/Dos programs and games at 166mhz processor speed, no slow emulation.*
- *Use low cost **MJpeg cards** to enhance your Amiga multimedia abilities, from £150.00 for VHS quality video record/playback. SVHS versions from £500.*
- *Perfect for **Video producers** moving from Amiga based Analogue to Digital production methods.*

All this for only £799.95
inc Vat, ex P&P

Siamese PC's include the following components....
Cyrix 166mhz processor, 512k cache motherboard, 16mb EDO ram, 1.7gb drive, 1.44mb Floppy drive, 16bit sound card, 4mb s3d 64bit PCI graphics card, Keyboard, Mouse, Windows 95, CE approved Mini Tower case. Amiga components:- Hydra pcmcia ethernet card, Siamese v2.1 Software (no switcher),

Call for configuration upgrade options

Siamese upgrade packs . . .
. . . for Amiga / PC owners.

!! Software only v2.1 !!

Supports optional High speed Ethernet network.
"the diference to the SiameseRTG was astounding"
Mat Bettinson CU Amiga

Launch special only £ 99.95



Siamese Video Switcher

Original Switcher card and cable kit for use with the Siamese PC pack above and Siamese RTG v2.1 software only pack.

£99.95

includes Siamese v1.5 software.

Still not convinced, then take the Video Challenge.

Buy the Siamese Video or Siamese MPeg CD for £5 inc P&P. Then if you want to buy the Siamese system we will refund double the CD / Video price from your Siamese order.
Don't wait, buy it TODAY !

Siamese / Hydra Ethernet Card
A1200 (pcmcia) - £149.95, A2/3/4000 - £169.95

Designed and manufactured by HiQ Limited software by Paul Nolan. email steve@hiqltd.demon.co.uk
9 Church Lane, Hockliffe, Bedfordshire, LU7 9NQ, UK. www.siamese.co.uk
tel 01525 211327, fax 01525 211328 No surcharge for Credit cards.

PD Scene

Temporarily filling Mr Korn's size nines is Jon Brooker, who strides his way through this month's choicest PD titbits.

★★★★★	Totally blinding
★★★★☆	Good
★★★☆☆	Average
★★☆☆☆	Substandard
★☆☆☆☆	Oh dear

Ami Bee

■ **Vertical Scrolling Shoot 'em Up**

■ **Available from: Classic Amiga PD, 11 Deansgate, Radcliffe, Manchester M26 2SH Tel: 0161 723 1638**

■ **Price: £1 plus 75p P&P per order**

In this Amiga version of a popular Bee related Nintendo game, you are required to guide our hero through wave upon wave of nasties. A collision with any of them or the many bullets they fire at you cause you to lose one of your lives.

Clouds add to your problems as they can mask wandering bullets. You can get power-ups or bonus points by shooting at these clouds as they glide happily by, thus releasing, naturally enough, a bell, which must then be caught. Shooting the bells after they are freed from their clouds can cause them to change colour. Beware if they turn black, as contact with these will cause death. Below you, pleasant trees and villages can be seen, oblivious to the fighting going on above them.

The action is fast and furious, and your bee moves smoothly so complex dodging manoeuvres can be achieved. The graphics are fine and this is a playable little demo. The title screen lists a multitude of additions which will be included in future versions to make this a more complete game. Highly derivative, but still mildly entertaining. This may be worth looking at, especially in a later incarnation. ★★★☆☆



Ami Bee

Brazzle Atkins

Teddy

■ **Bomber Man Puzzle Game**

■ **Available from: Classic Amiga PD, 11 Deansgate, Radcliffe, Manchester M26 2SH Tel: 0161 723 1638**

■ **Price: £1 plus 75p P&P per order**

One of the best things about the Amiga software scene is that it is so international. The advantage of this is that you get share-ware like this with introductions that are in comedy English.

The game itself requires you to guide Teddy, for whatever reason, through the various screens collecting all of the gems before making his way to the exit. His path is blocked by lots of stone blocks which he has to blow up by leaving bombs in the adjacent squares. Trying to escape to the exit before all of the gems are collected leads to a premature loss of life.

In the pre-game build-up, this is billed as just a bit of fun, which is lucky really because it's not very good. The screens can hardly be described as fiendishly cunning, as it's just a matter of blowing up blocks until you find the squares that open the doors. And as for the baddies who have been left to stop you, fiendishly cunning does not even get a look in. Their movements are completely random which takes a lot, if not all, of the skill out of killing them. When they finally realise that you are there (ie; when you are in the adjacent square), Teddy's movements are too slow and cumbersome to allow him to escape, meaning death is a certainty as both Teddy and baddie alike can walk past the primed bombs at will. Vaguely entertaining but ultimately slightly dull. ★★☆☆☆



Teddy

Brazzle Atkins Collection

■ **Old Demo Selection**

■ **Available from: See below**

This set of revamped A500 demos mark the resurrection of the legendary Brazzle Atkins, a man with a penchant for all things of a psychedelic nature.

Mr Atkins has gone to a certain amount of trouble hacking and fixing these demos so they run on your A1200, utilising its improved graphics capability. Furthermore, by allowing them to be dumped straight into RAM, you are now able to view them smoothly and without loading delays. As befits these masterpieces, they are available, in limited quantities only, in a glorious signed and numbered boxed set.

The box contains four digi-movies (Laurel & Hardy, Horror Show, Monty Python and Clockwork Orange), which require 2Mb of Fast RAM to run, Chaos Rock and Erpland, and the marvellous Reincarnation Of Sgt. Pepper. This trippy demo plays Lucy in the Sky with Diamonds over related pictures, animated by the constant colour scrolling. The movies are worth a look, but come with an advisory notice, particularly the one entitled Horror Show (Directors Cut). Computer images of Heads exploding can cause offence, even in artistic shades of grey.

We were sent the set in a lovely video case collection box which added a nice professional touch. These demos can be obtained either individually or in the video-box (if there are any left), try Classic Amiga PD, Saddletramps, or your usual library. Well worth a look, particularly if you are of a psychedelic disposition. ★★★★☆

Metal Mayhem

■ Gothic band promo

■ Available from: Saddle Tramps PD, 1 Lower Mill Close, Goldthorpe, Rotherham, S63 9BY Tel: 01709 888127

■ Price: 80p plus 50p P&P

This disk is a public airing of the works of a cheerful bunch of lads and their band which is called Genocide.

The band comprises three members who hail from the mythical depths of Tottenham in North London. They have added to the shroud of mystery which surrounds them by giving themselves the Tolkienesque names Glorfindel, Turin and Morgoth. Well, I'm guessing that these are assumed names, but I could be wrong.

The disk contains seven songs and seven pictures which can be accessed by some simple mouse clicking action.

The tunes, which revel under such Tolkien inspired titles as Gollum, Riders of Rohan and Saruman are aimed at those who like to be a bit moody and a bit heavy metal. Profiles of the band members include lists of their favourite bands, in which recurring themes are Iron Maiden, Carcass, Def Leppard, Death, Mega Deth and so on. This rather morbid list of names (which, rather sloppily I feel, excludes Death in June, poor work fellas) gives you a taste of the type of music you can expect, as do the band photos which are shot in graveyards and outside of churches.

As there are only three band members and one group shot, the symmetry of seven tunes and seven pictures is made by three scanned images with a vaguely Tolkienesque feel. Perhaps unfortunately, this is quite a reasonably put together little showcase for the works and interests of this group of IT students with a love of dour music. The main menu is laid out quite sensibly and the music and images are summoned relatively quickly and easily. If there is anything at all that lets it down, then it has to be the quality of the samples.

But if you share a love of Carcass, Cradle of Filth and photos of students hanging around in graveyards, you well may want to check this out. ★★★☆☆



Brazzle Atkins



Operation Firestorm

Operation Firestorm

■ Green Beret Clone

■ Available from: Saddle Tramps PD, 1 Lower Mill Close, Goldthorpe, Rotherham, S63 9BY Tel: 01709 888127

■ Price: £3.95p plus 50p P&P.

By straining my memory a bit, I can remember when Green Beret was released onto home computers such as the C64 and the Spectrum amid a blaze of publicity. I can also remember that after loading it up I was left wondering why I had bothered, so perhaps I am not in the best position to comment on this game. But I'm going to anyway.

Your mission is to guide your single soldier (who admittedly has more than one life) over various crates and barrels, past seemingly endless hordes of enemy soldiers armed only with his gun and his wits. I forget why he's doing this, but I don't think its important. His task is made easier by the fact that various crates have been left along his route which, when shot, collapse to reveal weapon power-ups, extra health and so on. But beware, some boxes also contain bombs which will blow up in his face if he gets too close.

The game is played out in a bland, two-dimensional world, where interaction with the background is limited to the objects and ledges that the writers decide are solid. I always want to step around the barrels, not jump over them, or go and investigate the truck in the middle distance, but this just is not an option in the flat world of Operation Firestorm.



Metal Mayhem



Shoot

Success in this game is best achieved by learning the route and knowing whether it is best to face the next set of baddies from on the floor or up on top of the wall. Its fun when your weapon gets the flaming bullets, because then it doesn't matter what route you take, you are still going to kick arse.

Clearly time and effort has gone into creating this game, and if it was freely distributed share-ware, I might be more prepared to concentrate on its virtues. However even from a budget release, I would hope for more creativity/originality. ★★☆☆☆

Shoot

■ Overhead view shooting game.

■ Available from: Saddle Tramps PD, 1 Lower Mill Close, Goldthorpe, Rotherham, S63 9BY Tel: 01709 888127

■ Price: 80p plus 50p P&P

The aim here is to guide your soldier through the enemy base to the HQ, where it ends. On your way you must pass several buildings which generate endless other soldiers who'll try to stop you reaching your target by shooting you. Fortunately they only fire one bullet every few seconds, whereas you can deliver a hail of leaden death. Also, by remaining stationary then holding down the fire button and rotating, you can strafe the immediate area for maximum death action. However, your rapid fire advantage suffices.

The demo opens with a mental picture of a soldier and a rousing tune, which filled me with great hope. Alas, I began to worry at the time it took to draw the screen, and worried more at the speed my soldier crawled across it. The collision detection is fine, I tended to know when a bullet had found its target, apart from occasions when either I or the enemy chose to disappear for a few seconds. I also found that living enemies could effectively disappear in a heap of their dead comrades. Given the title of the game is 'Shoot', I don't expect you're meant to look too closely at whether they're alive or dead.

It's the slow speed at which the characters move around that was the downfall. You can get all the way to your destination, and its fun to kill little blokes, but after a couple of minutes, I was quite happy to give up the quest and let them shoot me. ★★☆☆☆

PD Utilities

Andrew Korn takes a good, long shifty at a handful of top-notch utilities... observing a selection which ranges from the educational right through to the musical.

Utility of the Month...

Name: Tutenkhamun

- **Type:** Educational
- **Available from:** Online PD, Unit 5, Embassy Building, 51A Piercefield Road, Formby, Liverpool, L37 7DG. Tel 01704 834335.
- **Price:** £1.50 2 disks + 75p P&P

There's a fair demand for decent educational software judging by the number of people who ask us about it. There's actually a fair bit of it around on the PD scene, but unfortunately a lot of it is so unprofessional it is worrying. Tutenkhamun, an ex-licenceware title now being carried at normal price by Online PD is a happy exception.

This package impresses nicely, once you have got past the Amos installer routine (please guys, Amos is about the worst possible thing to use to write installers with, spare me!). In the July issue of CU Amiga you may have noticed that I raved over an educational title about the Titanic. This one is basically an identical package but about the Pharaoh Tutenkhamun and the background history of ancient Egypt.

Layout is all nice and straightforward, with a big list of on-screen gadgets to navigate around by, divided into groups by subject matter (ie. pictures, diagrams, background history etc.). You can click your way through in pretty much any order you like, and view the pictures either one at a time as seems appropriate to the text or select slide show mode. Once you have examined all the information available to you, there is a quiz for you to test out how much you have taken in.

The pictures are well scanned and relevant, the text literate and interesting, and all the preferences options ensure that the working environment is conducive to learning – no irritating music here, you can choose from five or have none at all.

Finally, this is very well researched and a nicely presented package which might not have the gloss and expertise of a professional package but is a damn fine piece of PD. ★★★★★


AT WORK
12:17:10
Picture: 1
EXIT

★★★★★	Totally blinding
★★★★☆	Good
★★★☆☆	Average
★★☆☆☆	Substandard
★☆☆☆☆	Oh dear

Directory Opus Help Guide

- **Type:** Book
- **Available from:** Christopher Jeffery, 45 Apollo Drive, Crookhorn, Waterlooville, Hants, P07 8AD
- **Price:** £7.50 inc P&P

This is an interesting and unusual offering, a self published book instead of a self published disk. Christopher Jeffery has directed his literary talents at producing an in-depth guide to the workings of Directory Opus 4. Liberally sprinkled with tips, step by step guides and screen shots, depth is impressive.

The introduction clearly explains the functional blocks of Opus 4, which is exactly what it needs to do. It then gives a complete explanation the configuration of screens and how to tune Opus 4 to your liking.

One of the most useful features of Opus is the filetype handling which allows Opus to recognise what ought to be done to a file. There are a some presets, but you can define your own. The guide has a clear explanation of the process and step by step guides for filetype recognition of Lha, Lzx, Zip, Zoo, DMS, Gif, Jpg, Pcx, Fli, Mov, Mpg, Midi and Wav types. A similar if briefer set of instructions cover adding your own buttons.

The whole thing comes in 50 loose leaf single sided A4 pages, which you'll need to hole punch and stick in a folder before all the pages disappear. Production quality is reasonably good, with clearly laid out pages and a logical progression. The only real downer is the lack of


DOPUS.1
DOPUS.1
OK
Workbench
63.8M
Storage
AsimCDFS
AWeb-II
C
Catalogs
Classes
Config
Devs
Dist-Settings
Fonts
L
Libs
Locale
Miami
Modules
MUI
PGP
Prefs
ANTF00882.jpg
blazoosm.jpg
blazoosm.jpg.info
camo1.iff
camo1.iff.info
cool_friend.jpg
cool_friend.jpg.info
cruisesm.jpg
Directory Opus Request
Enter directory name
Okay
Cancel
HD0:
HD1:ABoxFeature/
CD0:
DF0:
ENV:
HD0:
HD1:
HD2:
All
None
Parent
Root
Copy
Move
Rename
DELETE
Makedir
Assign
Check Fit
GetSizes
Hunt
Search
Run
Comment
Datestamp
Protect
Icon Info
Arc Ext
Encrypt
Read
Hex Read
Show
Play
Edit
Print
CHIP:1613K FAST:10598K TOTAL:12211K 17-Sep-97 11:53:46A

Directory Opus Help Guide

chapters, which would help navigation.

Plenty of people need some help on Opus 4, since we cover mounted it a while ago without a full manual. I think that the rather trickier Opus 5, which we cover mounted more recently, would be a more topical subject, but if it's 4 you want help with, this is the monkey for you. ★★★★☆

Basic Note Tutor V2

■ **Type:** The name says it all

■ **Available from:** Gordon McHendry, 6 McIver Terrace, Huntly, Aberdeenshire. AB54 8LF.

■ **Price:** £3 inc P&P

That's what I like to see, software which comes clean and tells you what it is all about. A delightfully garish purple floppy disk with a label on it saying 'basic note tutor' and a picture of some music staves. When you sort through a crate full of PD disks with nothing on them but a cryptic name such as Amiborg or YABMWAG, that kind of thing stands out. When the software stands out, it's even better.

Basic Note Tutor, thankfully, does stand out. Not because it is the greatest software on the planet, but because it does the job it sets out to do cleanly, competently and without any fuss. The idea behind this program is to supply an easy and fun route to learning the basics of reading musical notation.

In operation, BNT is very straightforward. The main menu screen offers help options, high score tables and so forth. Entering the main screen you are presented with a bass and a treble stave and a number of gadgets which at first look confusing but with reference to the quick start guide soon become clear.

The object of the 'game' is to follow the program's musical lead. A note plays and appears on a stave, and you have to figure out what it is. Get it right and you score a point and the note turns blue. Get it wrong and the program tells you what it should have been. You can play on either stave or on both, and there is a teach mode which allows you to hit the notes and see where they should appear. You can set the amount of time you have to think about it, so in theory you can keep going until you get adept at reading notes.

BNT may be programmed in Amos Pro, but I'm almost prepared to forgive it that. You won't learn theory from this, but very much along the lines of a decent typing tutor it will teach you notation without the traditional tedium involved. ★★★★☆



Basic Note Tutor V2

Class HD Utils 24

■ **Type:** Utilities compilation

■ **Available from:** Classic Amiga PD. 11 Deansgate Radcliffe, M26 2SH Tel: 0161 723 1638

■ **Price:** £1 plus 75p P&P per order

Classics compilation disks reach number 24. You might think that at 24 they would be starting to wear a little thin. Not a bit of it. At 24 disks, this still represents around 3% of a CD, and with 20 CDs worth of Aminet to pick from for starters, Classic really ought to be able to pick out the cream for their floppy disk creations.

What you'll find on this disk, in short order, is AMguide, an Amiga guide about the different models of Amiga, the latest issue of Jason Compton's excellent Amiga Report magazine including a preview of the HTML version, Blizzkick, a major bonus for Blizzard accelerator owners, Disksafe, which stops disks being invalidated by an incautious reset, Fixdisk in case you forgot to use disksafe, an Amigaguide for hard drives, a GUI bootblock installer, a hack to use cd32 controllers as mice, yet another password protection thingy, NewReqLibs, SuperDuper and Version Copy.

If you have a CD-ROM drive, then a few cover CDs will see you fine on the small utils front, but if not these Class HD utils are a good way to go. Another solid collection from the guys at Classic Amiga. ★★★★☆



```
These are the main specifications of all Amiga computers sold from the A1000
to the A4000 Tower.  I haven't included special models because most of them
upgrades of standard models.

Amiga 1000
Amiga  500
Amiga 2000
Amiga 3000 Desktop
Amiga 3000 Tower
CDTV interactive
Amiga  600
Amiga 1200
Amiga 4000 Desktop
Amiga 4000 Tower
CD32 game console
```

Class HD Utils 24

Best of Aminet

It's all go on the Aminet again after last month's hiatus, and the big Amiga revival is happening here as much as anywhere else. Even the elusive Lyle Zapato has been lured out of hiding to release an overdue update of Mindguard. If you are one of those people who didn't notice that we put this excellent package on our coverdisks about 6 months ago, you're the ones who need this package most. Go to utils/misc/MindGuard.lha (66k) and download this psychotronic influence jammer at once. The author's own LZ1 and LZ11 decryption algorithms make this about the best psychotronic jammer on any platform.

Just to prove the international flavour of the Aminet, here are a couple of foreign language items. The lovely Automatic Insults and Flowers Launchers util/wb/CdBS_AIFL1.53.lha (61k) constructs either insults or flowers (compliments). It will sit happily in the background scrolling its random messages across your menu bar at predetermined intervals. What's more, if messages like "Notre copain Billou est un protozoaire" aren't your tasse de thé, you can edit a text file for your own language. For German speakers I have picked out docs/hyper/smurftvguide.lha (63K), a guide to those foul blue midgets known in Germany as the Schlumpfs. Germans with taste may wonder why I picked this one out – possibly by sense of the absurd, possibly my revenge for your attempts to force us English to consume your highest quality beers instead of our own home-brewed sludge.

You've probably heard of Tamagotchi, the toy "virtual pet" craze which has been gripping the world. Now the Amiga gets in on the act with game/wb/tama.lha (36K), a Tamagotchi Simulator. If you like more sophisticated graphics than a mono LCD game can provide, check out demo/intro/DKG-Crash.lha (63K) where you can witness a fearsome looking racing game graphics engine. Finally check out Thierry Dichtenmuller's recent raytraced uploads, including pics/trace/chess.jpg (61K), and this month's winning pic.

Why Apple?

One day we all hope to see the rebirth of the Amiga with a PowerPC processor and other new features to enable it to compete again with today's systems. Sadly though, more than 2 years since Commodore's demise, little of substance has actually happened. We've seen prototypes and heard promises... we all hope to see new Amiga developments.

If you can't wait and need more performance today, without paying the earth - there's only one real alternative to consider... There's never been a better time to think Apple!

Only Apple offer you both desktop and portable computers that truly match the ease of use the Amiga brought to your desktop. Affordable Apple Macintosh systems have PowerPC RISC processors with thousands of off-the-shelf programs available in areas where the Amiga was always previously so strong.

And, if you need the most compatible of all computers, Macintosh is currently the only system that can run MacOS, DOS and Windows applications via optional DOS Cards or SoftWindows software.

PowerMac 5400/180

INTERNET READY

- PowerPC 603e
- 180Mhz
- 16Mb RAM
- 2Gb Hard Drive
- 8 Speed CD
- 15" Integral Colour Monitor
- 28.8bps Modem
- Design Keyboard
- 'Family' Software*

ONLY...
£986
Just £6.65 Per Week❖

*FAMILY PACK SOFTWARE INCLUDES...
• Grolier Multimedia Encyclopaedia • DK's Ultimate Human Body • Sammy's Science House • Thinkin' Things 3 • Full Throttle • PowerPete • The Best of European Soccer • Claris Works • HyperCard Player • Acrobat Reader • MacLink Plus • At Ease • Apple Internet Connection Kit • Apple Telecom 3.0

PLUS XTRA SOFTWARE... • Apple Magic Software Collection by Disney and • Descent

PowerMac 4400/200

INTERNET READY

- PowerPC 603e
- 200Mhz
- 16Mb RAM
- 1.2Gb Hard Drive
- 8 Speed CD
- 15" MultiSync Colour Monitor
- Design Keyboard
- FREE Internet Connection Kit

...comprising of an Integrated collection of Apple and third party software needed to connect directly to the Internet easily! Perfect solution for Mac users who want Internet access today! *(requires modem for Mac)*

Apple Internet Connection Kit

ONLY...
£1174
Just £7.93 Per Week❖

PowerMac 6500/275

INTERNET READY

- PowerPC 603e
- 275Mhz
- 32Mb RAM
- 4Gb Hard Drive
- 12 Speed CD
- 15" AV MultiSync Colour Monitor
- Video & TV/Text
- 33.6bps Modem
- Design Keyboard
- *'Creative' Software

ONLY...
£2408
Just £16.27 Per Week❖

*CREATIVE STUDIO SOFTWARE INCLUDES...
• All the software listed (left) in the 'Family Pack*' PLUS XTRA SPOFTWARE....
• KAI's Power Goo • Avid Cinema • Cubase AV • Dabbler • Adobe PageMill • Adobe PhotoDeluxe • 3D World • ClickArt • Actua Soccer

Other PowerMacs

SHOWN BELOW IS JUST A SMALL SELECTION FROM THE VAST RANGE OF APPLE MACINTOSH COMPUTERS WHICH ARE CURRENTLY AVAILABLE...

Model	MHz	CPU	RAM	HD	CD	Display	FREE Printer	TV/Text	Video	Modem	Keyboard	Price	Software Pack
PM4400	200	603e	16	1.2Gb	✓8	15" M/S	✗	✗	✗	✗	Design	£1174	✗
PM5400	180	603e	16	2.0Gb	✓8	15" Integral	✗	✗	✗	✓28.8	Design	£986	FAMILY PACK
PM5500 Black Mac	225	603e	32	2.0Gb	✓12	15" Integral	S/W 2500	✓	✓	✓33.6	Design	£1549	FAMILY PACK
PM6400	200	603e	16	2.4Gb	✓8	✗	✗	✗	✗	✓28.8	✗	£1820	HOME OFFICE
PM6400	200	603e	16	2.4Gb	✓8	✗	✗	✗	✗	✓28.8	Design	£974	HOME OFFICE
PM6400	200	603e	16	2.4Gb	✓8	15" AV M/S	✗	✗	✗	✓28.8	Design	£1139	HOME OFFICE
PM6500	250	603e	32	3.0Gb	✓12	15" AV M/S	S/W 2500	✗	✗	✓33.6	Design	£1938	HOME OFFICE
PM6500	275	603e	32	4.0Gb	✓12	15" AV M/S	S/W 2500	✓	✓	✓33.6	Design	£2466	CREATIVE STUDIO
PM8600	250	604e	32	4.0Gb +ZIP	✓24	✗	✗	✗	✗	✗	Extended	£3171	✗

Portable Macs

SHOWN BELOW IS JUST A SMALL SELECTION FROM THE HUGE RANGE OF POWERBOOK MACINTOSH COMPUTERS CURRENTLY AVAILABLE...

1400cs/133	16/1300, DS, CD	LIMITED OFFER! WSLI	£1585
1400c/133	16/1300, AM, CD		£2584
1400c/166	16/2000, AM, CD		£2760
3400c/180	16/1300, AM	LIMITED OFFER! WSLI	£2819
3400c/180	16/1300, AM, 12 Speed CD, Ethernet		£3171
3400c/200	32/2000, AM, 12 Speed CD, Ethernet		£3641
3400c/240	16/3000, AM, 12 Speed CD, Ethernet		£4346

Type of PowerBook Display...
DS=Dual Scan Display, AM=Active Matrix Display

Newton Handhelds

SHOWN BELOW IS JUST A SMALL SELECTION OF NEWTON HANDHELD MESSAGEPAD PRODUCTS/ACCESSORIES AVAILABLE...

Newton 2000 MessagePad 8Mb, Backlit Screen **LIMITED...**	£680
Newton 2000 Carry Case	£34
Newton 2000 Carry Case with room for Keyboard	£76
Newton 2000 AC Adaptor	£34
Newton 2000 Battery Pack	£28
Newton 2000 4Mb Flash Upgrade	£105
Newton 2000 Keyboard	£76

ALL current Newton models available along with their accompanying peripherals and software titles - CALL US

• FAMILY PACK software is as detailed above (see 5400/180 offer) • CREATIVE STUDIO software is as detailed above (see 6500/275 offer) • HOME OFFICE software pack includes all the 'Family Pack' software PLUS... Claris Impact and Claris Organiser

Please send the coupon or phone us - we'll rush you your FREE 'Why Macintosh' brochure pack

Mr/Mrs/Miss/Ms:
Initial(s):
Surname:
Daytime Phone:
Evening Phone:
Address:
Main use(s) of computer: HOME ☐ BUSINESS ☐ EDUCATION
Current computer and accessories:
County or Country:
Postcode:

Please cut out the coupon and return it FREE to...

GORDON HARWOOD COMPUTERS • FREEPOST MID04091 • Dept. CUA • NEW STREET • ALFRETON • DERBYSHIRE • DE55 9BR
Tel: 01773 836781 • Fax: 01773 831040 • e-mail: info@ghc.co.uk

Manufacturers' specifications and GH prices are correct at time of going to press, however, they may fluctuate and we therefore reserve the right to amend them - please confirm prices before ordering. Software/Product packaging for bundled systems/items may not be included and is shown for illustration purposes only.

Why Macintosh?

Performance:

All Macs have the latest PowerPC *RISC* processors (poor old Pentium systems are still *CISC* designs). Even entry level desktop Macs run at 180MHz, with 350MHz powerhouses at the top of the range (Mac PowerBook portables offer up to 240MHz).

Software choice:

Over 1,800 native software packages (written specially for PowerPC Processor Macs) have been shipped since Power Macintosh was launched in 1994 - plus there are thousands of industry standards which can also be used. Industry standard programs such as Microsoft Word and Excel, Pagestream, Word Perfect, FileMaker Pro, Quark Xpress, Photoshop and many others were developed for the Mac.

Creativity:

- Macintosh still dominates the creative world with an 80% market share in colour publishing.
- 65% of post-production video editing is on Macs.
- Macintosh is the most widely used system for the creation of Internet web pages.
- Most magazines (including the one you're reading right now) are created on Macintosh.

Multimedia:

- Apple is the World's No. 1 Multimedia PC vendor.
- All desktop Macs have a fast CD-ROM drive as standard (many portables have internal CDs too).
- In 1995, 42 of the top 50 selling CD-ROM titles worldwide were developed on the Macintosh.
- Many Macintoshes have built-in TV with teletext so TV clips can be recorded directly to disk as QuickTime movies.
- Many Macintoshes have built-in video in and out, for direct recording to VCRs.
- Some Macintoshes have internal digital video editing facilities as standard and many others can include this facility with an easy upgrade.

ISDN, the Internet & Communications:

- Macs are Internet/e-mail ready and many include modems with full send/receive fax and answer phone. Adding an ISDN connection is easy.
- Industry standard web browsers, Netscape Navigator and Microsoft Internet Explorer, were developed for the Mac meaning Access to Worldwide Web sites is easy.
- QuickTime, the Internet's standard format for video files, or QuickTime for Windows, are both Apple products. Of course QuickTime comes as standard with every Mac.

Connectivity & Expandability:

- Unlike other PCs, all Macs have networking built in as standard, so connecting systems together and adding shared printers etc. couldn't be easier.
- All Macintoshes have an external SCSI connector as standard. Adding external drives, ZIP/JAZ and other cartridge drives, scanners etc. really is Plug-and-Play.
- Low-cost digital cameras can be plugged into the Mac for instant real image input.

Education & Edutainment:

- Being the World's No.1 education supplier, quality Macintosh titles are widely available. Dorling Kindersley offer superb packages like The Ultimate Human Body and there is a varied supply from other leading software publishers too.
- Because Macintosh is the preferred system within many educational establishments, high quality software is assured.

Recreation & Games:

- Top games like The Ultimate Doom, Myst, Rebel Assault II, Dark Forces, Descent, Afterlife, Lost Eden, Legend of Kyrandia, Full Throttle & The Dig have all been developed for Macs.

Output & Presentation:

- Connecting and using colour printers (from Epson, HP, Apple and others) to Macs is so easy and with photo quality output the results are truly outstanding.

PERIPHERALS

MONITORS...	
Apple 15" AV MultiSync	£222
Apple 17" 1705 TCO MultiSync	£304
Apple 17" 1710AV TCO MultiSync	£528
Apple 20" AppleVision 850	£1291
LASER PRINTERS...	
Apple LaserWriter 4/600PS - A4, 600dpi	£528
HP LaserJet 6MP - A4, 600dpi	£727
Apple LaserWriter 12/640PS - A4, 600dpi	£939
INKJET PRINTERS...	
Apple StyleWriter 2500 A4 Colour	£175
Canon BJC 4550 A3 Colour	£328
Epson Stylus 600 A4 Colour	£234
Epson Stylus 800 A4 Colour	£351
Epson Stylus Photo 6 Colour	£387
Epson Stylus 1520 A2Colour	£704
Epson Stylus 3000 A2Colour	£1350
CAMERAS...	
Apple QuickTake 200	£328
Kodak DC20	£163
SCANNER...	
UMAX Astra 600S - PhotoShop LE	£199

GRAPHICS TABLET...	
Wacom ArtPad II with Dabbler	£116
STORAGE...	
D2 Quantum 2.1Gb External HD	£257
EZ230 Syquest Drive inc. Cart.	£163
D2 JAZ Drive inc. Cartridge	£304
D2 2400e 16 Speed CD Drive	£175
Micronet 2400E CD Drive (with 5 great software titles)	£210
COMMS...	
Global Village TelePort Internet (33.6, inc. Global Transfer s/ware)	£116
ACCESSORIES...	
Apple Design Speakers II	£58
Macally Joystick	£38
Macally Gamepad	£26
FlightStick Pro Joystick	£80
Gravis Firebird Joystick	£99
Jetstick	£45
Apple One Year On-Site Maintenance Warranty	£18

LOTS MORE PERIPHERALS - CALL!

SOFTWARE

GRAPHICS SOFTWARE...	
Quark Xpress 3.3	£763
PageMaker 6.5	£504
Illustrator 7.0	£328
PhotoShop 4.0	£469
KPT/MetaTool Actions	£52
MetaTools Soap	£41
KPT Bryce II	£163
KPT Goo	£41
FreeHand 7.0	£363
Alien Skin Eyecandy 3.0	£89
CorelDraw Suite Upgrade	£116
BUSINESS...	
Microsoft Office 4.2	£422
Microsoft Word 6.0	£288
Claris Works Office	£105
Claris Works to MS Office U/g	£210
Claris Em@iler 2.0	£49
Claris Organiser 2.0	£69
MYOB (Accounts) 6.0	£147
SoftWindows 3.0 (CD/3.5")	£88
SoftWindow '95 4.0 - CD	£129
UTILITY SOFTWARE...	
Norton 3.5	£79
After Dark 4.0 CD	£19
Adobe Acrobat 3	£187
Dr Solomon's (with 1Yr U/g)	£63
RAM Doubler 2.0	£41
Speed Doubler 2.0	£41

EDUCATION SOFTWARE...	
Grolier's Encyclopaedia	£35
Dorling Kindersley...	
20th Century Chronicle	£26
The Way Things Work 2.0	£28
Encyc. of Space & The Universe	£26
Ultimate 3D Skeleton	£21
Ultimate Human Body 2.0	£27
Virtual Reality - Cat, Bird, Dinosaur Hunter or Earth Quest	£21ea.
Encyclopaedia of Science 2.0	£26
World Reference Atlas	£33
Think and Talk... German, Italian, Spanish or French	£42ea.
Reading Development... Series 1, 2, 3 or 4	£26ea.
Teach Yourself Calculus	£18
Music Central	£26
Thinkin' Things 3	£14
LEISURE SOFTWARE...	
Actua Soccer	£28
SIM City 2000 CD Collection	£33
Warcraft II	£33
3D Landscape 2	£47
FA/18 Hornet 3.0	£39
Torins Passage	£31
Wing Commander IV	£43
Marathon Trilogy	£28

BOOKS - Full Range, Call for details

◆ *BUSINESS FINANCE:* ◆

Weekly finance prices are exclusive of VAT and are based on 3 year fixed cost Apple Commercial Credit Lease for business users.

PERSONAL FINANCE:

Finance is also available for individuals visiting our showrooms and paying a minimum of 10% deposit.

There's even a...

'Deferred Payment Plan'

- It's easy to buy your Mac with a GH Personal Finance Option
- Ask for details of one to suit you
- Example... Pay 10% Deposit on a balance over £1200 and then pay nothing for 4 months (subject to status and £18 arrangement fee).
- Written details are available on request

AT GH WE MAKE EVERYTHING EASY...

PHONE GH...

We welcome all major credit/debit cards with NO TRANSACTION SURCHARGES.

ORDERING BY POST OR FAX...

Please include your Name, Address and preferably daytime and/or evening phone or fax number with your requirements. If using your debit/credit card include its number and valid from/expiry dates (also issue number with Switch cards). Please make cheques (allow 7 days clearance), Drafts or P.O.s payable to... **Gordon Harwood Computers Limited.**

GH PRICES...

All UK and EC customers - VAT is included at the standard rate of 17.5% to all prices. UK overseas Armed Forces Personnel may be exempt VAT - please ask for details.

DELIVERY...

We offer prompt shipment with fully insured express delivery options throughout the UK, Europe and Worldwide at a modest cost. If ordering by mail, please call to confirm the appropriate delivery charges.

GH WARRANTY...

Manufacturers' standard warranties apply or, ask about GH's comprehensive extended options which are always recommended for professional users to minimise costly down time - details available on request.

ALL PRICES INCLUDE VAT

...and are shown for personal users only. Business users please ask for VAT Exclusive prices.



Why not visit our showroom and see a range of Macintosh products on demonstration...

AN EASY DRIVE FROM MOST AREAS,
We're open Mon to Sat - 9.00am until 5.00pm

PLEASE CALL TO CONFIRM AVAILABILITY BEFORE MAKING A LONG JOURNEY TO VISIT US.

Why Harwoods?

Gordon Harwood Computers was founded as a specialist Commodore dealer in 1982 and we're still supporting Amiga users today. We began supplying Macintosh systems in 1991 when it became clear that Commodore was failing to capitalise on the technological advantage it had. We needed to have products available that fulfilled the needs of our customers who were demanding...

- Systems with a future
- Systems with outstanding performance
- Systems with unsurpassed ease of use
- Systems without the problems and disadvantages associated with DOS/Windows, which still persist and trouble users even now.

Today we have grown to become one of the largest Apple Authorised Resellers in Europe. Our extensive product knowledge and solid support facilities emphasise our status as one of a select group of Apple Authorised Service Centres and accredited Apple Higher and Further Education Alliance Resellers.

This advertisement is an invitation to treat, not an offer to sell. Goods are not supplied on a trial basis. All transactions are subject to Harwood's Terms and Conditions of Sale, a copy of which is available on request. All Trademarks are acknowledged. E&O.E.

gordon harwood computers

GH 15TH ANNIVERSARY
1982-1997

We've been providing Commodore products since 1982 and today supply a range of 100% Motorola based systems including Blizzard and Cyberstorm along with video products and other peripherals...

01773 836781

PICK UP THE PHONE AND ORDER TODAY FOR DELIVERY TOMORROW

ALL PRICES INCLUDE VAT @ 17.5%

For your protection all Cards are fully Security Checked

OFFICIAL ORDERS...

We supply Central, Local Government and Education Departments along with Major PLCs

'FAST-FAX'...

on 01773 831040 for a Rapid Response to your Quotation or Order Requirements!

GORDON HARWOOD COMPUTERS

DEPT. CUA/5 • NEW STREET
ALFRETON • DERBYSHIRE
DE55 7BP
Tel: 01773 836781
FAX: 01773 831040
e-mail: info@ghc.co.uk

CD-ROM Scene

A multitude of Megabytes on CD for your complete satisfaction. If you haven't invested in a ROM drive yet, you know what you've gotta do...

Light Rom 5

Light Rom 5

■ Available from: Weird Science, Q House, Troon Way Business Park. Humberstone Lane, Leicester LE4 9HA.

■ Tel: +44 (0)116 246 3800

■ Price: £29.95 + £1 p&p.

Graphic Detail's Light ROM CD collection hits number 5 with this 3 CD gathering of Lightwave, Imagine, and 3D studio objects. The Light ROM collection is drawn from contributions from 3D artists around the world, all contributors accepted getting a free copy of the next disk. As a result the quality of the models varies a bit, as does their copyright status.

The first CD consists of a collection of Lightwave objects, a little short of 300 of them ranging from a simple extrusion representing a barrier to a very detailed model of a dragon. There are a collection of scenes to go with the objects and the data is represented in two forms to make the scene structure more compatible with LW3.5 and below as well as the more recent versions. There is a completel collection of thumbnail Jpegs so that you can see what the models look like before going through the bother of a test render.

The second CD contains a collection of image maps and studio 3D mesh collection. There are actually a lot more models in this collection than there are in the Lightwave collection, with plenty of quality models, but Amiga users shouldn't feel left out, as these will load into Lightwave. Disc three consists of a large collection of backdrops and a whole bunch of Imagine objects. The 250 or so backdrops are all good quality 24 bit images, mostly in the 752 by 480 pixel resolution most suitable for broadcast images, but there are also a few in 640 by 400 backdrops too. The collections of Imagine objects are unlikely to amaze and excite any long term imagine users as they are on the whole well circulated objects. Anyone who bought the Imagine PD 3D disc will find this collection very familiar indeed.

It is interesting to compare this collection to the Dinosaur ROM disk reviewed last month. At a third of the price, this offers a lot more objects. The difference is that this is a huge object jamboree while the Dinosaur ROM disc was a collection of only ten models but with a very high attention to detail, while this is a mass collection of rather varied objects. If you need a high quality Dinosaur model for professional work you are a lot better buying last month's offerings than searching through this. This disk is much more appropriate to the amateur or semi pro renderer, for whom it offers a very useful and very in depth collection.

If you haven't got enough object yet, you won't do much better than this. **89%**


Scene
Objects
Surfaces
Images
Lights
Camera
Effects
Record
Options
Quit
View
XY
XZ
ZY
Perspective
Light
Camera
Edit
Object
Bone
Mouse
Move
Rotate
X
Y
Z
Reset
Center
Numeric Input
Motion Graph
Preview
Render
Selected Item
Current Frame
Key Frame
Previous
Next
Spline Controls
Create Key
Delete Key
Parent
Target
Grid
Position

Light Rom 5


Image Backdrops_6
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120

Light Rom 5

MIDINet

■ **Available from:** Weird Science, Q House, Troon Way Business Park, Humberstone Lane, Leicester LE4 9HA

■ **Tel:** 0116 246 3800

■ **Price:** £19.95 plus £1 p+p

One of the most useful examples of the Amiga's ability to fit in with the world around it is the ease with which PC CD-ROMs can be used.

While it's not possible to run PC applications without an emulator, there's still a whole world of data files doing the rounds that can quite happily be loaded into your favourite Amiga applications and put to good use. Take MIDI files for example. Like all the best file format standards, they were designed to be independant of any particular manufacturer's equipment, and the system works beautifully. This CD, although intended for the PC market, is packed with MIDI files which can be used on any computer that can read the CD, and that of course includes the Amiga.

These days you don't even need a MIDI module to play back MIDI files – you can do it from a standard Amiga using GMPlay – but realistically this is going to appeal mainly to those with some real MIDI gear. There are thousands of them here, including hundreds of cover versions of well known pop songs, national anthems, game theme tunes and original compositions.

Possible uses for these range from backing tracks for karaoke systems and cabaret performers to inspiration sources for budding MIDI programmers, passing through the most obvious one of all: a load of beats, tunes and riffs to pilfer for your own productions. Then of course you could simply use them like a collection of mods, purely for your own listening pleasure. There's far too much on here to comment on the general quality of the files, and anyway, they will nearly all need some degree of tweaking in order to play back perfectly on your particular set up.

Aside from the MIDI files there's also plenty of software on the CD that for most Amiga users will never be used, as it's all PC specific. Still, you never know when something on there might come in useful. As for whether that PC software is any good, your guess is as good as mine, so the overall rating here is based purely on the Amiga-relevant content of the disc. Basically if you want a massive collection of MIDI files, look no further. **78%**

MIDINET CD-ROM

Aminet 20

■ **Available from:** Weird Science, Q House, Troon Way Business Park. Humberstone Lane, Leicester LE4 9HA.

■ **Tel:** +44 (0)116 246 3800

■ **Price:** £10.95 + £1 p&p.

The Aminet CD Collection hits the big 20. The collection is as huge as ever, another gigabyte or so compressed down to fit on a CD-ROM.

As usual, there is a bonus package, this month a special registered version of the brilliant image processing/animation utility Wildfire, with a special upgrade deal for the latest commercial version.

Amongst the archives all the normal areas are well represented, from biz/cloan filled with the latest locales, patches and upgrades for Cloanto's excellent Ppaint to util/wb for all those little WorkBench utilities, a directory which may be last on the list alphabetically but it is always crammed full of goodies. Examples this month include the latest Class Action, a hack to make gadtools look better on 1 by 1 ratio screens, the latest Magic Workbench archive (well, some people like it!) and a new virtual floppy program.

As you can see from the list below, this is an Aminet disc with plenty to keep you entertained. The demo collection isn't the best I've seen but has plenty of swirling plasmas and ray-traced tunnels to keep you amused. Broken Promises from the demo/aga drawer was a particularly choice one with some lovely if rather too blurry glow effects.

The packed game section includes about a million dogfight and tanks style games, previews of Shadow of the Third Moon and Nothingness, a Myst like game from France and a huge collection of patches and installers. One of the best games is oddly to be found in comm/tcp – FreeCiv, the network Civilization clone which is taking the Internet by storm. You should also find that the pix drawers and the mods drawers have been popular places to upload to lately with loads and loads of really good offerings.

The more serious user shouldn't feel left out. There are all the usual new datatypes, patches, hacks and rexxscripts, plus all the oddities we have come to expect, from a sieve of Eratosthenes prime calculator to a disk port based Amiga networking system. Aminet disks vary a little, wobbling backwards and forwards around the excellent mark. This one is well on the upper part of the curve, one of the better disks in a while. Unmissable, yet again. **91%**





'GAS' by Francesco Gambino

email: MC6144@mclink.it

Aminet Set 5 contents

biz	30Mb	docs	41Mb	mods	246Mb
comm	43Mb	game	118Mb	mus	25Mb
demo	66Mb	gfx	66Mb	pix	194Mb
dev	28Mb	hard	3Mb	text	36Mb
disk	12Mb	misc	27Mb	util	34Mb

Art Gallery

Send pictures to: Art Gallery, CU Amiga, 37-39 Millharbour, Isle of Dogs, London E14 9TZ or E-mail them to artgal@cu-amiga.co.uk.

Music by Alastair Walker



Some people might call this red and grey spikey bits but they just don't get abstract art. Ever since Wassily Kandinsky abstract artists have tried to capture the essence of music in images. Then Kandinsky was an idiot, so who knows?

Zodiac by Mark B. Clarke



Mark uses Imagine, Dpaint, Photogenics and Image FX in his work. This image shows some imaginative use of processing effects and textures. Mark is looking for work in the computer graphics industry, particularly doing games graphics.

River City by Dave Higton

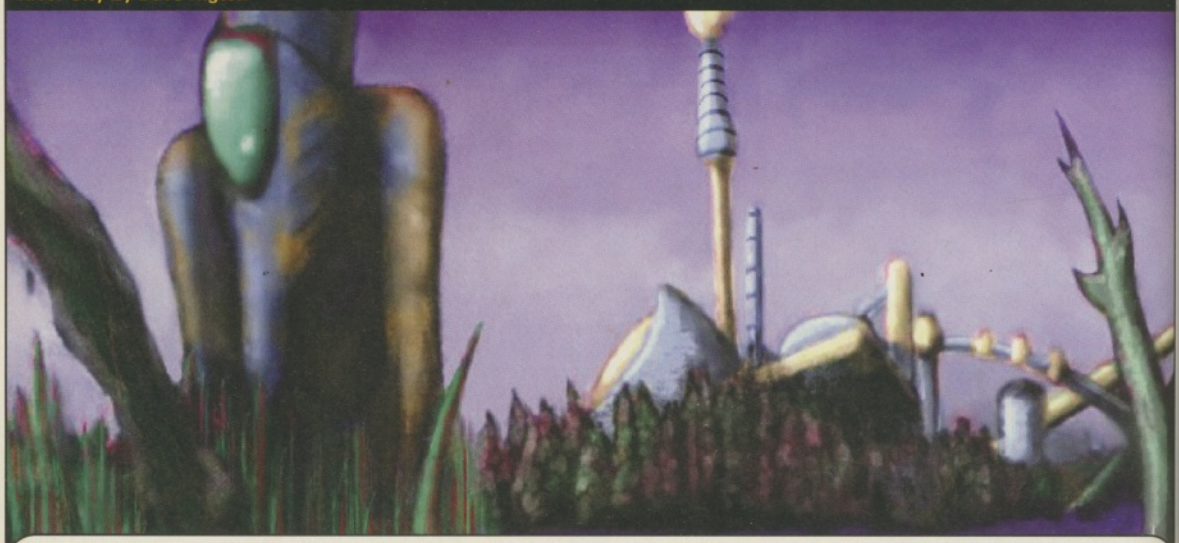

The unreal colours and soft edges give this image a dreamlike quality reminiscent of the city scapes of surrealist genius Max Ernst. As for whether Dave was following Ernst's theme of the city in the jungle as conciousness submerged in the subconcious, we may never know.

Direct Hit by Steffan König

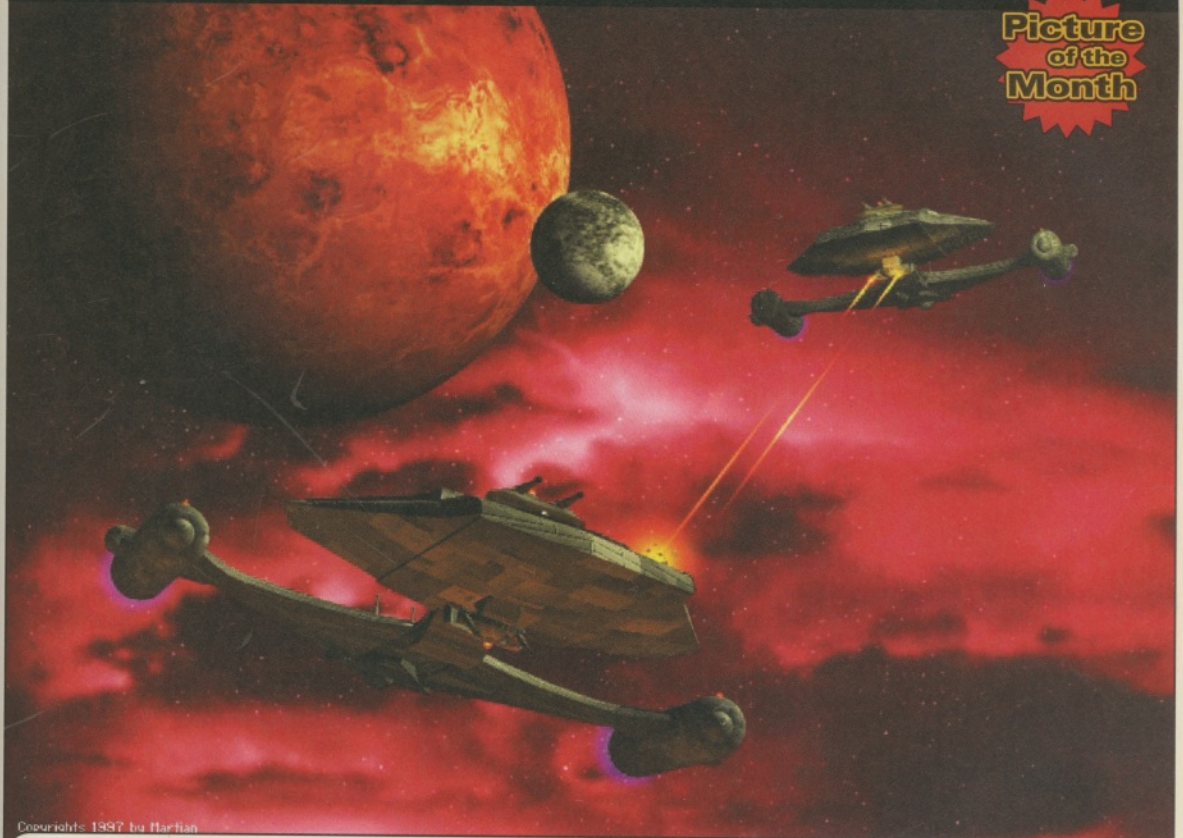

This excellent piece of work was produced with Cinema4D, XiPaint, Ppaint and Image Engineer. Steffan doesn't specify that the models are his, but even if they aren't this is an impressively assembled image…

Fighter by Steffan König



… on the other hand if he does do the models himself he's got an enormous amount of talent. The lighting is well positioned and realistic – not the easiest of tasks but one Steffan has done very well.

Hall by Peter Devos



This Image was rendered in Cinema 4D by Peter, a Belgian Insurance analysis programmer! The play of shadows is very nice, but I think a stronger centre of composition would have been good.

GASTEINER

0181 345 6000
Facsimile 0181 345 6868

LONDON'S
AMIGA SAL
& REPAIR
CENTRE

EXPORT, TRADE & EDUCATIONAL
INQUIRIES WELCOME

A1200 RAM CARD

Trapdoor fitting . clock. FPU socket

0MB	£29.00
WITH 4MB	£44.99
WITH 8MB	£59.99
WITH 4MB & 33Mhz FPU	£54.99
WITH 8MB & 33Mhz FPU	£69.99

FPU

Will fit all makes of RAM-CARDS & ACCELERATORS

33MHz 68882 plcc	£8.99
50MHz 68882 pga	£29.99
CRYSTALS	£4.99

SIMM

We have been selling simms & memory for amiga computers for 10 years, we carry large stocks that fits all makes of ram cards & accelerators.

30pin	
1mb	£10.00
4mb	£25.00
72pin	
2mb	£5.00
4mb	£12.50
8mb	£27.99
16mb	£59.99
32mb	£89.99

MONITORS

MICROVITEC 14"	£199.00
MICROVITEC 17"	£339.00
SHOP SOILED PHILIPS 8833	£109.00

PRINTERS

EPSON 400	£159
EPSON 600	£249
EPSON 800	£359
CANON BJC4100	£149
CANON BJC4200	£169

NEW! NEW! NEW!

MOTOROLA 3400 PRO 28.8 DATA/FAX MODEM	£39
33.6 DATA/FAX MODEM	£59
55.6 DATA/FAX MODEM	£99

ZIP 100MB CARTS	£12.99
JAZZ 1GIG CARTS	£69.99
SQUEST 230MB CARTS	£18.99
SQUEST 135MB CARTS	£12.99
JAZZ DRIVE	£349.00
ZIP DRIVE	£119.00
ZIP TOOLS	£20.00

THIS MONTH'S SPECIAL OFFER

COLOUR SCANNER
WITH SOFTWARE
FOR AMIGA
£249.00

28.8 FAX &
MODEM FOR ALL
AMIGA £79.99

POWER SUPPLY
4.5 WATT FOR
A500+A600
+A1200
£12.99

CHAOS PACK FOUR GAMES	£5
EXTERNAL FLOPPY	£39
INTERNAL FLOPPY	£23

CD-WRITERS

2X6	£300
4X6	£450
MAKECD	£39.95
MEDIA	£3.00

TOWER CASES

MINI CASE	£29.95
MIDI CASE	£39.95
FULL CASE	£49.99

ZIP DRIVE

IDE INTERNAL
£99.00

MOUSE

400DPI
£5.00

HARD DRIVES

For all A1200 & A600 AMIGA COMPUTERS
2.5" IDE Super slim with cables & software

170mb	£59.99
540mb	£129.9
810mb	£129.9
1.8gig	£199.9
2.5gig	£349.9

3.5" IDE Super slim fast will fit all Amiga a1200 &
A4000 computers with cables & software.

420mb	£79.99
850mb	£89.99
1.2gig	£119.9
1.7gig	£149.9
3gig	£169.9
4gig	£199.9
6gig 9m/s	£349.9

3.5" SCSI BEST DEAL IN UK

May need scsi controller work with A1200 & A600
with squirrel, A2000 to A4000 with Okagon

1.2gig	£149.9
2gig	£199.9
4gig	£299.9
6.4gig	£499.0
8gig	£poa
External SCSI Case 45Watt PSU	£49.99
Squirrel	£39.99
surf	£74.99
oktagon 4008	£84.99
mulitiface iii	£72.99
zip drive	£119.9
Jazz drive	£349.9
ZIP TOOLS	£20.00
syquest 230mb	£199.9

CD-ROM

SCSI CD-ROM fits A600 & A1200 comes with its
one power supply & Squirrel

2 speed	£129.0
6 speed	£179.0
8 speed	£219.0
16 speed	£249.0

IDE CD-ROM
Fits A2000 A4000 & A1200 with Alfaquatro (A120
needs case)

12 speed	£59.00
16speed	£65.00
24 speed	£79.00
100 SPEED------------NEW!!!------------------	£99.0
AlfaQuatro	£54.99
case for A1200 & A600 only	£39.95

SPEAKERS

80watts	£14.99
120watts	£16.99
300 watts	£39.99

DELIVERY CHARGES

NEXT DAY COURIER FROM £10.00 (UK MAINLAND ONLY). WE ALSO OFFER PRE 9:00AM, PRE NOON AND SATURDAY DELIVERY SERVICES AT A SURCHARGE. POST FROM £3.50 FOR ITEMS WEIGHING LESS THEN 1.5kg. ALL DELIVERY CHARGES ARE EXCLUDING OF VAT. FOR PERSONAL COLLECTION, OUR OPENING TIMES ARE MON-FRI 9:00AM-6:00PM SAT 9:00AM-2:00PM. E&OE PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. ALL TRADEMARKS ACKNOWLEDGED.

TRADERS TERMS & CONDITIONS AVAILABLE UPON REQUEST.

WE ACCEPT SWITCH,DELTA,VISA,MASTERCARD AND AMEX. WE ALSO ACCEPT OFFICIAL ORDERS BY POST. PLEASE ALLOW 5 WORKING DAYS FOR CHEQUE CLEARANCE.

Amiga Workshop



From 3D rendering to image processing sound files, this month's Workshop provides keen instruction for every genre of Amiga computing going. Get stuck in!

76 Imagine 4.0

John Kennedy talks about recursive rendering to save time on those Imagine 4 created 3D masterpieces.

80 C Programming

More coding tips, this month looking at modules, screens and menus. Get with the program.

82 Wired World

Following the European Computer Trade Show, we temporarily put our Net tutorial aside to cover Internet gaming.

84 Surf's Up

The Net God offers comment on the latest developments in the Internet arena, plus all the hottest news.

85 Surf of the Month

Including a plethora of sites which devote themselves to the complete annihilation of self built robots in Robot Wars.

88 Sound Lab

Dhomas Trenn takes the unique approach of utilising Image processing techniques for audio.

90 DTP

The ProPage article editor falls under Larry Hickmott's scrutiny in the Desk Top Publishing tutorial this month.

96 Q & A

Readers write in seeking help from our panel of Amiga experts. Incorporating tech tips for those DIY oddities.

99 A to Z

Our A to Z guide to the Amiga hits the letter B. More thrilling explanations of all thing B found here.



Imagine 4.0 p76

Surf of the Month p85



DTP p90

Regulars

86 Back Issues

Missed an issue of CU Amiga? Shame on you! Still, all is not lost since you can find out how to order one from here.

102 Backchat

Comments, criticisms, suggestions and general information from our dear readers appears here. This is the place to see your name in print.

103 Subscriptions

Get CU fast and get it cheap! Life is good when you subscribe to CU Amiga, the UK's best selling Amiga Magazine.

104 Points of View

CU's panel of opinion this month features Mat Bettinson on the DIY phenomenon and Andrew Korn on Amiga gaming, or rather the lack of.

PART 11

Imagine 4.0

Wheels within wheels within wheels... create your own recursive renderings to drive yourself mad.

We touched last month on using backdrops, and specifically how to speed up rendering times by pre-rendering the background. Obviously this technique isn't suitable for every case, but there are times when it can be especially effective – not to mention saving hours of processing times.

The backdrop image used in Imagine doesn't have to consist of a static image. Instead, you can use a series and frames, given names which include a number to keep them in order. This opens the door to all kinds of weird and wonderful effects. Nevertheless, you still have to pick your projects carefully, as not all images will benefit.

Skies & Starfields

There are two common situations when a background animation won't be affected by anything in the foreground: background skies, and space starfields. Whatever happens in the foreground (barring events of cataclysmic proportions) the background is unchanged. When your spaceship flies past the camera, you really don't want the light source contained in the engines to illuminate a nearby planet. So it's practical to pre-render a background and use it, maybe even several times in one project. Here's some important tricks for using backdrops.

1. The backdrop, animated or not, must be the same dimensions as the final project. This can be a nuisance, especially when rendering a preview. There is no way round this, if you want to render a small file as a preview, switch off the backdrop or provide a new, correct sized, one.
2. Backdrops will appear behind all objects in your scene and will show through transparent materials, however, they won't act as accurately optically as other objects. You also should beware the lack of reflections. If you create a shiny sphere and place it in front of a backdrop, it will look strange because there is nothing in front of the camera to be reflected in it. You could try using the Global Brush setting with the same settings as the Backdrop to cure this.
3. If you're using an image in the background, but want to get away from using a backdrop, try this. Create a rectangle object, the same dimensions as your background images (for example, 320 by 256). Apply the background image to it as a texture, and make sure the rectangle is bright so it won't be shaded or have any shadows appearing on it. Then position it in your scene, so that its edges cannot be observed.



▲ Here we have a shiny sphere with first the backdrop only, and then the global brush setting switched on as well.

Brushing up

In the same way backdrops can be animated, so can brushmap textures. Not only is it possible to morph between various procedural texture settings as we've seen in previous months, but it's possible to animate the very texture itself. Again, all manner of neat effects are possible, from animated control panels on spacecraft to moving television set objects and realistic moving people.

The monitor's screen

These are the images which are going to appear on the monitor screen. There is no point rendering them any larger than 160 by 128 pixels.

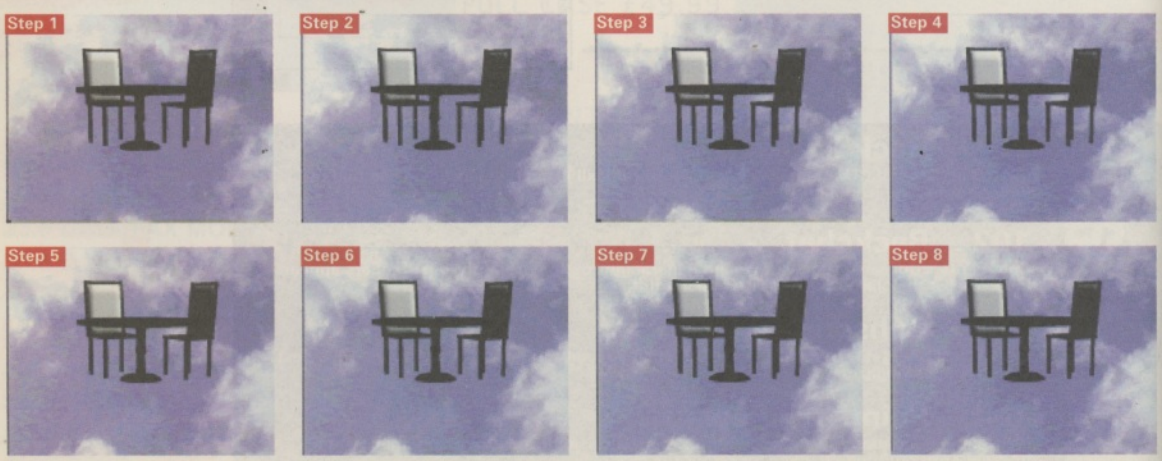

Step 1

Step 2

Step 3

Step 4

Step 5

Step 6

Step 7

Step 8



Globals Info
Start Frame 1
End Frame 50
Global Brush Name
Max Seq. 0
Backdrop Picture hd3:clouds/cl.iff
Max Seq. 50
Ambient R 10.00 Horizon R 10.00 +Zenith R 200.0 -Zenith R 200.0
Ambient G 10.00 Horizon G 10.00 +Zenith G 200.0 -Zenith G 100.0
Ambient B 10.00 Horizon B 200.0 +Zenith B 100.0 -Zenith B 200.0
Fog Bottom 0.0000
Fog Top 0.0000
Fog Length 0.0000
Fog R 0.000
Fog G 0.000
Fog B 0.000
Star Field Density 0.0000
Transition frame count 0

▲ **Feed in the base file name (missing the numbers) and set the Max Seq value. Imagine will do the rest automatically.**



Imagine Brush Mapping Info
Filename hd3:im4/render11b.
Brsh Label Imp/render.pix/pi
Subgroup
Lock State
Priority 1
Full Scale Value 255
Max. Sequence # 0050
Mix/Morph Value 1.00
Object: Sphere
Backdrp: Default
Rflctns: Default
Size: 100x100
Use RGB as: Color
Wrap Method: Flat in X and Z

▲ **Apply an animated texture to the monitor screen. You can still apply other textures, to create realistic reflections or stratches.**

One irritating feature of Imagine is a contradiction between the names of any rendered frames and the names required for brushmaps. So although the program will create files such as "pic0001", "pic0002" and "pic0003" the brushmaps are expected to be named "frame.0001", "frame.0002" etc. Unlike other packages, it's impossible to use the previously rendered frame in a currently rendering scene. Instead you need to take a few passes.

Here is how to create an animation project with two layers of animation: To begin, there's a table with a monitor on top. Behind, the sky slowly drifts by. The monitor displays a moving image of the same scene, with its drifting sky...

Recursive

Firstly, render the scene which will appear on the monitor. Most important is the drifting sky texture, which you can create in various ways, drawing a series of clouds in Deluxe Paint is easiest. I elected to convert some video film footage of passing clouds into a series of IFF files. This alone took all morning – I filmed the sky then digitised it on a non-Amiga system – but there's no reason why I couldn't have used VideoMaster or ProGrab. The hardware used created an AVI file, but a quick run through the Main Actor Broadcast utility soon split it up onto IFF files which Imagine was happy with.

Back to the Scene Editor, where I loaded the required objects and positioned the camera etc. Then to the Action Editor, in particular the Global setting. It's here the magic happens. Use the Backdrop setting to enter the name of the first of the cloud images. To keep Imagine happy, strip off the numbers (so cloud0001 becomes cloud) and then enter a number in the Max Seq box. This box should contain the number of frames which make up the background animation, and Imagine uses it to check that all frames are used. When it reaches the last frame, it starts again at 1.

Small is good...

Now the scene could be rendered. As this was going to appear mapped to an object, there's no need to render it as a large file: 320 by 256 is too much, 160 by 128 is sharp enough. After rendering all fifty frames, the names "pic0001" to "pic0050" have to be renamed. This is the sort of thing an ARexx script is ideal for, but no matter how you do it you should end up with frames called "pic.0001" to "pic.0050".

Now you can render the final animation. Use the same objects and settings as before, but this time add a texture to the monitor screen. This is done in a very similar way to adding the filename to the backdrop requester, with a base name and then Max Seq setting.

Once again, Imagine will cycle through all the frames applying each in turn. For each frame in the project, Imagine will not only load a new backdrop pattern, but it will also load a new texture for the monitor object on the table. I also took the opportunity to move the camera's last position, so that it pans around and then zooms into the monitor screen.

The final result is extremely pleasing, but there is no reason to stop there. Time it right, and the animation will loop perfectly. when the camera has finished zooming into the screen, the image displayed will match the first frame of the animation – and so the entire sequence will replay over and over again in some recursive nightmare. Or, take the last batch of frames, rename them as before, and use them in yet another animation. You may want to batch-process the files to blur them slightly, or change their colours.



▲ **Main Actor is an excellent Amiga utility, which every animation fan should have.**

Any art program with an ARexx port can be coerced into doing this (yet another reason to own an Amiga) as writing batch control programs on other platforms is often impossible. And don't worry if you can't make your only cloud animation, I hope to provide it and other animations ready for you to use, on next month's cover CD-ROM. ■

John Kennedy

The final frames

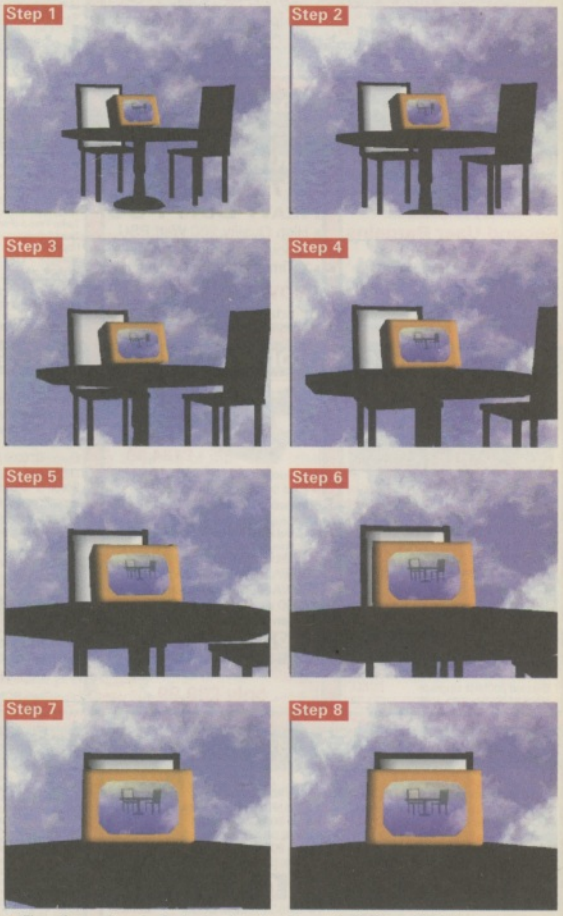

▲ **These frames from the final animation show the moving background, altering camera position and the animated texture on the monitor screen. Cool!**

Visit us on the Web! - http://www.firstcom.demon.co.uk/

Late Opening Wednesday & Thursday until 7.30pm

Open Sunday 11am to 4pm

FIRST
COMPUTER CENTRE

LOW COST DELIVERY

2-4 Week Days	£3.99
Next Week Day	£5.99
Saturday Delivery	£14.99

Delivery subject to stock availability

Tel: 0113 231 9444

Fax: 0113 231 9191 BBS: 0113 231 1422

E-Mail: Sales@firstcom.demon.co.uk

Showroom Address:

Dept. CU, Unit 3, Armley Park Court
Stanningley Road, Leeds. LS12 2AE

Please allow five working days for cheque clearance. Prices are correct at the time of going to press. Please check latest prices before ordering. All sales are subject to our standard terms and conditions of sale. Copy available upon request. E&OE.

SWITCH

Lombard Finance



AUTHORISED REPAIR CENTRE

Our in-house engineers can offer you a no-obligation **FREE** estmate of repair on your Amiga or any computer peripheral. A delivery tariff of just £5.00 is charged or alternatively, visit our large showroom. We can also arrange for your items to be collected by courier for an additional charge of £11.00

Amiga Hardware

Amiga Magic Packs

Includes Wordworth V4SE, Datastore, Organiser, Turbocalc 3.5, Personal Paint V6.4, Photogenix 1.2SE, Pinball Mania, & Whizz. Now also includes Directory Opus 4.12.

A1200 - 2Mb RAM - No HD	£249.99
A1200 - 6Mb RAM - 210Mb HD	£419.99
A1200 - 68030EC/40MHz 10Mb RAM 260Mb HD	£549.99
A1200 - 68040/25MHz - 18Mb RAM 1.3Gb HD	£699.99
A1200 - 68040/40MHz - 18Mb RAM 1.3Gb HD	£799.99

All Hard Drive versions of the Amiga range come with Scala MM300 preloaded. Amiga 68040 machines include 250 Watt PSU as standard.

Monitors

AMIGA 1438s 14" Multisync only £259.99

MICROVITEC 1701 17" Multisync only £399.99

CD-ROM & I/O

Ultra IDE External CDROM

For A1200/A600. Complete Kit. Includes PSU, Cables & Software

Ultra Drive Kit (No CDROM)	£99.99
Ultra Drive 4x	£139.99
Ultra Drive 6x	£149.99
Ultra Drive 10x	£159.99
Ultra Drive 16x	£169.99

Internal SCSI CD-ROM Drives

Toshiba 4101B 2x Speed	£49.99
Toshiba 5701 12x Speed	£105.99
TEAC 16x Speed	£133.99
Toshiba 3801 16x Speed	£136.99
Plextor X20 20x Speed	£165.99

Squirrel SCSI-II Interface *£44.99

*When bought with any SCSI device, £54.99 if bought separately

SurfSquirrel SCSI-II Interface *£79.99

*When bought with any modem or SCSI device. £99.99 if bought separately

Octagon/GVP SCSI Card £99.99

SCSI-II interface card for big box Amiga's A4000/2000 etc.

HiSoft SYSTEMS

New!

THE WHIPPET

- High Performance PCMCIA Serial Port
- Upto 230,00bps. 400% Faster Than Standard
- Fully Buffered For Safer & Reliable Data Transfer
- New Faster Technology 56k Modem Ready!!!

Only £49.99 (£44.99 if bought with modem)

Hard Drives

2.5" IDE Hard Drives

Includes installation software, screws, and instructions. For A600/A1200 machines

210Mb	£64.99	1.6Gb	£147.99
810Mb	£119.99	2.1GB	£199.99

Build Your Own SCSI Hard Drive

- SCSI Case with built in PSU £49.99
- SCSI Hard Drive (Select from right)
- SCSI Squirrel Interface £45.00
- Optional Construction £10.00
- Includes Full 12 Month Warranty, All Cables & Software

3.5" Bare Hard Drives

IDE		SCSI	
1.2Gb	£115.99	540Mb	£159.99
1.6Gb	£140.99	840Mb	£199.99
2.1Gb	£152.99	2.1Gb	£229.99
3.2Gb	£179.99	3.2Gb	£263.99
4.3Gb	£227.99	4.5Gb	£684.99

3.5" IDE Hard Drive Install Kit

Includes set-up software, cables and full instructions. See above for Hard Drive prices

Only £19.99

Software

Aura 8 Bit Sound Sampler	£29.99
Blitz Basic v2.1	£19.99
Devpac 3	£50.99
Directory Opus 5.6	£45.99
Disk Expander	£14.99
DiskMAGIC	£34.99
G.P.Fax	£44.99
Hi-Soft Basic 2	£58.99
Hi-Speed Pascal	£64.99
Hi-Soft Amiga C++	£149.99
iBrowse	£24.99
Megalosound	£27.99
Mini Office	£29.99
Money Matters 4	£46.99
Net & Web (Hi-Soft)	£29.99
Net & Web 2 (Hi-Soft)	£59.99
Net Connect V2	£49.99
Network PC (Weird Science)	£17.99
Personal Paint 7.0 CD Version	£49.99
Personal Paint 7.0 3.5" Version	£49.99
Power Scan Epson Flatbed Software	£49.99
Pro Midi Interface	£19.99
Scala MM-400	£149.99
Studio 2 Pro (Print Enhancing Software)	£49.99
SurfWare Internet Suite	£9.99
TechnoSound Turbo II Pro Sampler	£29.99
Termite TCP (Hi-Soft)	£44.99
Termite (Hi-Soft)	£29.99
TurboCalc 4.0 CD-ROM Version	£49.99
TurboCalc 4.0 3.5" Version	£49.99
Turbo Print 5 (Print Enhancing Software)	£49.99
Twist 2 Relational Database	£74.99
Upper Disk Tools (Hi-Soft)	£10.99
Vista Pro 3 Lite	£4.99
Voyager V3	£23.00
Wordworth 6 3.5" Version.	£39.99
Wordworth 6.0 CD-ROM Version	£39.99
Wordworth 6.0 Office CD-ROM	£49.99
Iomega Zip/Jazz Tools	£16.99

CD-ROM Software

Free Prima Shareware CD upon request when you spend £20+ on CD Discs!

Delivery just £1.50 per title, or £3.99 for 4+

1078 Weird Textures	£12.99	Epic Collection 3	£17.99	Meeting Pearls 4	£8.99
3000 JPEG Textures	£12.99	Epic Encyclopedia 1997	£25.99	Miami	£27.99
3D Images	£8.99	Eric Schwartz Animations	£17.99	Mods Antholdgy V1	£23.99
3D Objects	£8.99	Euro CD Vol.1	£12.99	Movie Maker Special FX 1	£17.99
LSD & 17Bit Comp. Vol 1	£17.99	Euro CD Volume 2	£12.99	Multimedia Backdrops	£14.99
LSD & 17Bit Comp. Vol 2	£17.99	Euroscene 2	£5.99	Network 2 CD	£12.99
LSD & 17Bit Comp. Vol 3	£17.99	F1 Licenceware Amiga	£26.99	Network 2 + CD32 Cable	£33.99
17bit 5th Dimension	£17.99	Gamers Delight 2	£28.99	Nothing But Tetris	£9.99
17bit Collection	£10.99	Geek Gadgets	£17.99	Nothing But Gifs AGA	£17.99
AGA Experience 1 NFA	£8.99	Geek Gadgets 2	£17.99	Octamed Sound Studio	£19.99
AGA Experience 2 NFA	£8.99	Graphics Sensations 1	£17.99	Oh Yes More Worms	£8.99
AGA Experience 3 NFA	£12.99	Gif Sensation 2CD Set	£17.99	Personal Suite	£17.99
AGA Toolkit '97	£8.99	Giga Graphics 4CD Set	£28.99	PCX-86 PC Emulator	£49.99
Amiga Desktop Video 2	£12.99	Global Amiga Experience	£14.99	Retro Gold	£17.99
Amiga Developers CD	£12.99	Golden Demos	£14.99	Scene Storm	£12.99
Amiga Repair Kit	£39.99	Guinness Disc Of Records	£17.99	Sci-fi Sensation 2	£17.99
Aminet 13 to 20 (each)	£12.99	Horror Sensations 18+	£17.99	Sound Fx Sensation	£12.99
Aminet Set 1 to 3 (each)	£17.99	Hottest 6	£17.99	Sounds Terrific/Octamed 6	£17.99
Aminet Set 4 & 5 (each)	£26.99	Illusions In 3D	£8.99	Space & Astronomy	£16.99
Arcade Classics Plus	£12.99	Image PD CD	£17.99	Speccy 1997	£16.99
Artworx	£8.99	Insight Dinosaurs	£4.99	System Booster	£17.99
Assassins 2	£15.99	In-To-The-Net	£17.99	Utilities 2 (PDSoft)	£17.99
Assassins 3	£17.99	Kara Collection	£29.99	Utilities Experience	£13.99
C64 Sensations Vol.2	£16.99	Learning Curve	£17.99	Weird Science AMOSPD 2	£16.99
Card Games	£12.99	Light ROM 4	£24.99	Weird Science Animation	£8.99
Dem Rom CD	£12.99	Light ROM Gold	£17.99	Weird Science UPD Gold	£17.99
Emulators Unlimited	£17.99	Magic Publisher	£39.99	Workbench Add-ons	£20.99
Encounters	£12.99	Magic W/Bench Enhancer	£8.99	World Info 95	£17.99
Ency.Of The Paranormal	£17.99	Meeting Pearls Vol. 3	£8.99	Zoom 2	£18.99

Part Exchange

Money off your new hardware purchases!

Call for pricing now to part exchange your old items, and get real value for your unwanted monitors, printers, memory, computers, etc.

Second User Bargains Available Now!

Totally refurbished units, with a three month minimum warranty. Call for current stocks.

Please note, we do not buy items for cash. Goods can only be exchanged against a more expensive purchase.

Power Units

PRIMA ATOM

HEAVY DUTY PSU

- High Quality 200 Watt PSU
- Colour Co-Ordinated Casing
- 4 Times Standard Power

Now Only £59.99

Standard Amiga PSU £29.99

Memory / Acc.

Prima A1200 4Mb RAM	£66.99
Prima A1200 8Mb RAM	£81.99

Includes Battery Backed Clock. Add £25.00 For 33MHz Co-Pro



1Mb 30 Pin (1*9) 70ns SIMM	£6.99
4Mb 30 Pin (1*9) 70ns SIMM	£20.99
4Mb 72 Pin (1*32) 60ns SIMM	£15.99
8Mb 72 Pin (2*32) 60ns SIMM	£27.99
16Mb 72 Pin (4*32) 60ns SIMM	£57.99
32Mb 72 Pin (8*32) 60ns SIMM	£115.99
256 x 4 DRAM (DIL Type) (each)	£4.99
Prima A500 512k RAM No Clock	£19.99
Prima A500+ 1Mb RAM	£29.99
Prima A600 1Mb RAM No Clock	£29.99

A1200 Accelerator Cards

Blizzard 1230-50	£99.99
Blizzard 1260-50	£364.99
Blizzard SCSI Module	£69.99
Blizzard 200MHz Upgrade	£CALL
Viper IV 42MHz With 4MB	£71.99

Storage Options

iomega Zip Drive Only £134.99

- Includes One 100mb Cartridge
- Fast SCSI Interface Version
- Includes Cable & Amiga Zip Tools

Zip Drive 100mb Media (each)	£10.99
Squirrel to Zip Adapter	£17.99

A SCSI Interface may be required at an extra cost. See Squirrel section on this page, above right.

A500/A500+ Internal Drive	£34.99
A600/A1200 Internal Drive	£34.99
A4000 Internal Drive	£99.99
Golden Image External Drive	£41.99

WIZARD SATURN

External 1mb Floppy Drive for all Amiga's



only £39.99

Free Dir. Opus 4.12!

Graphics

Scanners

Power Hand Scanner Mono V4.	£99.99
256 greyscale on AGA Amigas. 64 Greyscale on others.	
Power Hand Scanner Colour	£129.99
High Specification 16.7 Million Colour, 24 Bit Scanner	
Epson GT5000 Flatbed Scanner	£249.99
2400 DPI Output. 24 Bit Colour. Requires Software Below	
Epson GT8500 Flatbed Scanner	£399.99
3200 DPI Output. 32 Bit Colour. Requires Software Below	
Amiga Epson Scanning Pack	£49.99
Includes Full Image Scanning Software & Required Cable	

Genlocks

Lola L-1000 Genlock	£89.99
Includes Scala HT-100 Presentation/Video Software	

Pro-GRAB SVHS 24RT Plus

- 24 Bit Colour Realtime Digitiser
- Easy Set-Up With Full Software

Only £99.99

Pro-Grab PCMCIA Adapter £39.99

Modems

DIAMOND MULTIMEDIA SupraExpress

SupraExpress 56 Voice

- BABT & CE Approved
- Voice Capabilities
- 56,000 Data
- 14,000 Fax
- 5 Year Warranty

Only £129.99

SupraExpress 36 Voice

- BABT & CE Approved
- Voice Capabilities
- 36,600 Data
- 14,000 Fax
- 5 Year Warranty

Only £69.99

Amiga Surfware Internet Pack

THE COMPLETE SOFTWARE SUITE FOR ALL YOUR INTERNET NEEDS. INCLUDES 30 DAYS FREE INTERNET ACCESS, EXCLUDING LOCAL CALL CHARGES

Only £9.99 Just £5.99 with any modem

Miscellaneous

Zydec ZyFi Speakers

ZyFi 2
64 Watt PMPO
Mains Powered
Only £25.99

ZyFi 2 Pro
120 Watt PMPO
Mains Powered
Only £42.99

ZyFi To Amiga Cable	£4.99

Chip Upgrades

68882 Co-Pro 33MHz PLCC	£24.99
68882 Co-Pro 50MHz PGA	£39.99
Agnus 2Mb 8375-16 (A500+)	£27.99
CIA 8520 I/O Controller	£18.99
Kickstart 2.04/2.05 ROM Chip	£24.99

Miscellaneous

A520 TV Modulator	£34.99
Amiga Joysticks From...	£9.99
Wizard 560DPI Mouse	£12.99
Quality Mousemat (4mm)	£2.49
3.5" Floppy Drive Head Cleaner	£1.99
80 Cap. Banx Lockable Disk Box	£9.99

Printers

Free Drivers supplied where possible with printers. Some printers require additional software. See software section above. Please contact us for full details.

All our printers include a free data cable worth £4.99!

Canon

BJ-30 Mono Inkjet	£159.99
720 x 360 DPI Entry Level Printer. 30 Page ASF Built-In	
BJC-70 Colour Inkjet	£185.99
720 x 360 DPI Colour Printer. 30 Page ASF Built-In	
BJC-240 Colour Inkjet	£135.99
720 x 360 DPI. Mono & Col. Carts Supplied. 80 Page ASF	
BJC-4200 Colour Inkjet	£174.99
720 x 360 DPI. Dual Cartridge Printing. Our Most Popular!	
BJC-4550 Colour Inkjet	£299.99
720 x 360 DPI. Up to A3 Colour Printing. Dual Cart Printing	
BJC-620 Colour Inkjet	£249.99
720 x 720 DPI. Four Separate Cartridge Colour Printing	

CITIZEN COMPUTER PRINTERS

ABC 24 Pin Dot Matrix	£119.99
300 DPI. 50 ASF Built-In. Optional Tractor Feed at £34.99	
ProJet-IIC	£129.99
300 x 300 DPI Colour Inkjet Printing. 70 Sheet ASF Built-In	
Printiva 600C	£291.99
600 DPI Colour, 1200 DPI Mono. Advance Micro Dry Tech.	

EPSON

Stylus 400 Colour Inkjet	£168.99
720 x 720 DPI. 4ppm Black, 3ppm Colour. 100 Sheet ASF	
Stylus 600 Colour Inkjet	£234.99
1440 x 720 DPI. 6ppm Black, 4ppm Colour. 100 Sheet ASF	
Stylus 800 Colour Inkjet	£312.99
1440 x 720 DPI. 8ppm Black, 7ppm Colour. 100 Sheet ASF	

HEWLETT PACKARD

HP-340C Portable Colour	£179.99
600 x 300 DPI Mono, 300 x 300 DPI Colour. 2ppm Mono	
HP-400C Colour	£139.99
600 x 300 DPI Mono, 300 x 300 DPI Col. Both Carts Inc.	
HP-690C Plus Colour	£199.99
300 x 300 DPI Colour Printing. Now Even Faster.	
HP-870CXI Colour	£349.99
600 x 600 DPI Mono, To 8PPM, 600x300 Colour To 4PPM	
HP-6L Mono Laser	£334.99
600 DPI, 1Mb RAM, 6 Pages Per Minute Printing	
HP-6P Mono Laser	£569.99
600 DPI, 2Mb RAM, 8 Pages Per Minute Printing	

Cables

This is only a small selection, Please call

23 Pin To 15 Pin Multisync Adapter	£6.99
9 Pin Mouse/Joystick Extension	£4.99
Mouse/Joystick Switcher	£13.99
Surge Protector 4 Plug Adap.	£14.99
Parallel Printer Cable 1.8M	£4.99
Parallel Printer Cable 4.5M	£11.99
Parallel Printer Cable 10M	£19.99
Parallel Bi-Di Printer Cable 1.8M	£4.99
Parnet Cable 25 Pin D Type	£14.99
Null Modem Cable 25DF-25DF	£9.99
Modem Cable 25DF-25DM	£9.99
RGB 9 Pin Monitor Cable Extension	£14.99
Multisync Monitor Cable Ext.	£11.49
1438 23 Pin To 15 Pin D Adap.	£9.99
Amiga To Scart Cable (CM8833 Mk1)	£9.99
9 Pin Extension Cable 3M	£6.99
Amiga to Philips 8833Mk II	£9.99
25D To Centronics Male	£11.99
Centronics Male To Female 1M	£14.99
Centronics Male To Male 1M	£14.99
SCSI 3 Device Internal Cable	£13.99
SCSI 7 Device Internal Cable	£16.99
Micro D Male To Micro D Male	£32.99
Micro D Male To Centronics Male	£32.99
25D To Centronics Female	£17.99
Internal 50 Way SCSI To External	£12.99
Amiga A600/A1200 2.5" IDE Cable	£9.99
Dual 3.5" IDE Cable	£9.99
A600/A1200 2.5" To 3.5" Cable Set	£19.99

Consumables

Canon

BC01 BJ10/SJ48 Black	£14.99
BC02 BJ200 Black	£14.99
BC05 BJC210 Black	£18.99
BC06K BJC240 Photo Kit	£34.99
BC06 BJC240 Photo Cart	£23.99
BC09F BJC240 Fluores.	£23.99
BC10 BJ30 Head & Ink	£28.99
BC11 BJ70 Heat & Cart	£33.99
BC20 BJ4x00 Head&Black	£23.99
BC21 BJ4000 Head + Inks	£31.99
BC22 BJC4200 Photo Cart	£23.99
BC22K BJC4200 Photo Kit	£37.99
BC29F BJC4200 Fluores.	£27.99
BCI10 BJ30 Black 3 Pack	£10.99
BCI11BK BJ70 Black 3 Pk	£7.99
BCI11C BJ70 Colour 3 Pk	£13.99
BCI21BK BJC4000 Black	£4.99
BCI21C BJC4000 Colour	£12.99
BJI20B BJC6x0 Black	£5.99
BJI20C BJC6x0 Cyan	£4.99
BJI20M BJC6x0 Magenta	£4.99
BJI20Y BJC6x0 Yellow	£4.99
BJI642 BJ300/330 Black	£10.99

Refills/Re-Inks

Re-Ink Ribbon Spray	£9.99
Black Ink Cart Refill 40ml	£7.99
3 Colour Ink Refill 75ml	£29.99

Citizen

ABC/Swift Mono Ribbon	£4.99
ABC/Swift Colour Ribbon	£12.99
Projet IIc Colour Cart.	£29.99
Projet IIc Mono Twin Pack	£6.99
Project IIc Mono + Head	£21.99
Printiva Black	£5.99
Printiva Cyan	£5.99
Printiva Magenta	£5.99
Printiva Yellow	£5.99
Printiva Silver	£15.99

Epson

Styl. Col. 400/600 Black	£17.99
Styl. Col. 400/600/800 Col	£18.99
Styl. Col 800/1520 Black	£18.99

Hewlett Packard

Deskjet 340 Hi-Cap Black	£18.99
Deskjet 5x0 Series Black	£20.99
Deskjet 5x0/340C Colour	£22.99
Deskjet 6x0 Series Black	£20.99
Deskjet 6x0 Series Colour	£22.99
Deskjet 8x0 Series Black	£22.99
Deskjet 8x0 Series Colour	£24.99

Paper

500 Sheets (Fanfold/Single)	£4.99
1000 Sheet (Fanfold/Single)	£8.99
100 Sheets Epson 720dpi	£12.99
200 Sheet Canon Hi-Res	£24.99
500 Sheet HP Bright White	£10.99

3.5" Floppy Disks

Bulk DSDD

10x	£3.49	100x	£26.99
30x	£9.99	200x	£49.99
50x	£14.99	500x	£114.99

Branded DSDD

10x	£4.99	100x	£41.99
30x	£13.99	200x	£76.99
50x	£21.99	500x	£175.99

Bulk DSHD

10x	£3.99	100x	£29.99
30x	£10.99	200x	£55.99
50x	£16.99	500x	£129.99

Branded DSHD

10x	£5.99	100x	£44.99
30x	£15.99	200x	£82.99
50x	£23.99	500x	£189.99

500 Disk Labels	£6.99
1000 Disk Labels	£9.99

Amiga X-Cad available FREE from our Web site! - http://www.firstcom.demon.co.uk/

Amiga C Programming

PART 4

This time around we delve into the world of modules, screens and menus... get with the program.

In this month's tutorial we're going to look at a number of different things, from code structure to screens and menus. In some ways we're going to get closer to a real program and move away from toy examples.

The first step on this path to a proper program is to break our program into two parts, by acknowledging that the old code to set a clipping region on the window is actually fairly generic and not dependent on our particular program. In fact, we can generalise further to allow any rectangle to be set as the clipping region.

To do this we've created the files "clip.h" and "clip.c", which together form a small module providing the three functions "setClipSized()", "setClipInternal()" and "removeClip()". These functions are declared in "clip.h" (as prototypes, like we've met before) and the definitions are given in "clip.c".

In StormC you merely add these files to the project window and it takes care of the rest. For other compilers you'll need to start worrying about creating object files or inventing a 'Makefile', since once our main program file ("screen0.c") has been compiled it must be linked with the compiled version of "clip.c" (ie, the "clip.o" object file) in order to create a complete executable.

This month's first example, "screen0.c" contains only two changes to last month's final example: the clipping code has been removed to "clip.c" (and slightly generalised) and the call to "setClip()" has been replaced by a call to the new "setClipInternal()".

Custom screens

The main two Amiga themes of this tutorial are screens and menus. The next example, "screen1.c", builds on the last by opening a custom screen for the drawing window. Because of the neat way our example has grown, the changes are quite subtle. We've replaced the code bracketed by "LockPubScreen()" and "UnlockScreen()" with the wrapper shown in Example 1 to create a new screen. The second change is to link the window to this screen, by passing "scr" to the window creation function and using the "WA_CustomScreen" tag when opening the window.

Menu

A textual and/or graphical list of commands and options that invoke and control features of a program. The lists pop-up when the user presses the menu mouse button (usually the right button). They are normally grouped logically into 'Project' items, 'Edit' items etc. On a standard Amiga, you'll notice the menus appear on a bar at the top of the screen.

Programatically, a program's menus are contained in a menu strip. This is an array of menus (or menu groups) in "Menu" structures, and each menu group is an array of menu items in "MenuItem" structures. There is one deeper level, as each menu item can contain a further array of menu sub-items (again, in "MenuItem" structures).

The GadTools library provides functions for creating menus very simply indeed from a "NewMenu" structure.



▲ Hello to a world of menus.

Example 2

```
/* The description of our menus */
struct NewMenu mymenu[] =
{
  { NM_TITLE, "Project", 0, 0, 0, 0,},
  { NM_ITEM, "Quit", "Q", 0, 0, 0,},
  { NM_END, NULL,  0, 0, 0, 0,},
};
```

If you run "screen1" you'll notice that the 3D look is missing (on a standard Amiga machine, at least). The window and gadgets all look very flat. This is because of the backwards compatibility with the older versions of the Amiga OS, so to get the 3D effect we need to do a little more.

The thing we should do is add a "DrawInfo" specification of the pens that can be used for drawing the 3D bits. This is an array of pens to override the default pens (as set by the Palette preference program). The minimal value for this array is a singleton "~0", which specifies no overriding of the default pens. The third example, "screen2.c", contains this change and modifications to make the window fill the screen (by making use of the "Width" and "Height" elements of the "Screen" structure). Run "screen2" in order to see the difference.

What's on the menu?

There are two ways of creating menus: the hard way (using Intuition functions) and the easy way (using GadTools functions). We'll opt for the easy way, since we're already

Example 1

```
/* Try to open a new screen with 16 colours (four bit-planes deep) */
if(scr = OpenScreenTags(NULL, SA_Depth, 4, TAG_DONE))
{

  /* Rest of the code... */

  CloseScreen(scr);
}
```

Example 3

```
case IDCMP_MENUPICK:
{
 UWORD menuCode, menuNumber, itemNumber;
 /* Loop over all the menu selections in the menu code */
 for(menuCode = intuimsg->Code;
   going && menuCode != MENUNULL;
  menuCode = ItemAddress(win->MenuStrip, menuCode)->NextSelect)
 {
 /* Do something based on what menu item was selected... */
 }
 break;
}
```

3D Look

The 3D look is created by using bright and dark colours (specified by 'Shine' and 'Shadow' pens) to draw borders around gadgets and other window furniture. The pens used for doing this are stored in a "DrawInfo" structure for each screen. The user can specify a preference for the colours using the Palette preference program.

Example 4

```
/* Extract the menu number and menu item number from the menu code */
menuNumber = MENUNUM(menuCode);
itemNumber = ITEMNUM(menuCode);
/* Now decide what to do based on what menu item was selected */
/* Only one item: Project=>Quit */
if(menuNumber == 0 && itemNumber == 0)
 going = FALSE;
```

DrawInfo

A structure associated with each screen that contains information necessary for drawing the 3D look and other Intuition graphics. This includes, for example, specifications of the shine, shadow and menu pens, as well as font and display aspect information.

Example 5

```
struct NewMenu mymenu[] =
{
 { NM_TITLE, “Project”, 0,  0, 0, 0,},
 { NM_ITEM, “Quit”,  “Q”, 0, 0, 0,},
 { NM_TITLE, “Pen”,  0,  0, 0, 0,},
 { NM_ITEM, “Next”,  “N”, 0, 0, 0,},
 { NM_ITEM, “Prev”,  “P”, 0, 0, 0,},
 { NM_ITEM, NM_BARLABEL, 0,  0, 0, 0,},
 { NM_ITEM,  “Reset”,   “R”, 0, 0, 0,},
 {  NM_END, NULL,     0,   0, 0, 0,},
};
```

Example 6

```
/* Extract the menu number and menu item number from
the menu code */
menuNumber = MENUNUM(menuCode);
itemNumber = ITEMNUM(menuCode);
/* Now decide what to do based on what menu item was
selected */
switch(menuNumber)
{
case 0: /* Project menu */
 /* Only one item: Quit */
 if(itemNumber == 0)
  going = FALSE;
 break;
case 1: /* Pen menu */
 switch(itemNumber)
 {
 case 0: /* Next */
  setFgPen(win, pen+1);
  break;
 case 1: /* Prev */
  setFgPen(win, pen-1);
  break;
 case 3: /* Reset (item 2 is the bar!)*/
  setFgPen(win, MYINITPEN);
  break;
 }
 break;
}
```

Module

A (largely) stand-alone section of code, factored into a separate compilation unit (ie; a separate file), and normally containing code that is re-usable or unaffected by changes to other parts of a program.

In C, this tends to normally be a pair of files: a header file (ending in ".h") and a code file (ending in ".c"). The modules of a program are compiled to object files (ending in ".o") which are linked together with the main code (ie; the module containing "main()") to produce an executable. Factoring code sensibly into modules makes it easier to maintain the module code (since it's in its own file) and speeds up compilation (since the module code needs to be recompiled only when you make changes that directly affect it).

using GadTools functions.

The next example, "screen3.c", shows how to add a very simple menu to our program. This menu contains just the 'Project' menu group with a 'Quit' menu item. The menu description is shown in Example 2. As you can see, we can specify a key for the 'Quit' menu item. This indicates that pressing the right Amiga key together with the 'Q' key (with or without Shift) will do exactly the same as selecting the 'Quit' menu item (and it's pretty much indistinguishable at the programming level, too).

To create the menu we've factored the most relevant code (using "CreateMenus()" and "LayoutMenus()") into a "createMenuStrip()" function. This function must be passed the screen's visual information so that the menus can be laid out using the correct pens, in just the same way that we needed this to create the gadget context.

Once the menu has been created it must be set to be the window's menu strip. This is performed by using "SetMenuStrip()" after the window has been opened. The 'closing bracket' for "SetMenuStrip()" is "ClearMenuStrip()", which must be called before the window can be closed.

Menus will generate "IDCMP_MENUPICK" messages (so this is added to the window's "WA_IDCMP"), and each one of these messages can indicate a number of menu selections (this can happen when you click the mouse's select button on different items before releasing the menu button). The code to handle "IDCMP_MENUPICK" is therefore a little more complicated than normal (see the outline in Example 3).

The core of this is the "for" loop,

which has three parts: initialisation, loop check, and end-of-loop action. The initialisation sets up "menuCode" from the "Code" of the IDCMP message. The loop check is that this code is valid and that the program has not been requested to quit. The end-of-loop action is the update of "menuCode" to the next menu selection.

The result of "ItemAddress()" is the "struct MenuItem*" corresponding to the current selection in "menuCode". You can use this to do more advanced things, but in general you need only the "NextSelect" item. Again, you might like to treat this as an idiom. It's the body of the loop that's really important, and the one for the simple "screen3.c" example is shown in Example 4.

As you can see, the menu selections are couched in terms of menu and item numbers (and maybe sub-item numbers), extracted from "menuCode" by the "MENUNUM()" and "ITEMNUM()" macros. These numbers relate to the positions in the menu description (see Example 2 again). Our single menu item is 'Quit', which is the first item in the first menu group. So, if this item is selected the "menuNumber" and "itemNumber" will both be zero. Other values are also possible, so even in this fairly simple case we don't assume that if we get a menu selection it had to come from 'Quit' being picked.

More on the menu

The fifth example, "screen4.c", advances further by making a more useful set of menus (see Example 5). A new 'Pen' menu group has been added, with 'Next', 'Prev' and 'Reset' items. A nice bar separates the first two items from 'Reset'.

This requires a more complicated body for the "for" loop in the "IDCMP_MENUPICK" case, as shown in Example 6. To support this change we've factored the pen changing code (which updates the palette gadget) into the function "setFgPen()" and made "pen" a global variable. The menu selections are handled using "switch" statements, with comments to remind us to which items the numbers relate. Take care to note that the bar item is counted as an item, so 'Reset' is item number three in the "Pen" group, not item two!

It's worth noting at this point that this is a very 'raw' way of handling menu selections. With larger menus it becomes rather unmanageable, and in those cases it's worth using the "nm_UserData" data item (the last zero in each of the "NewMenu" structures in the "mymenu" array) to identify the menu item or, for the really advanced, to specify the function to be called on selection. We'll see this in a later tutorial.

Tidying up

The final example, "screen5.c", tidies up the "handleIDCMP()" function, which is now rather long and unwielding. The main culprits are the "IDCMP_GADGETUP" and "IDCMP_MENUPICK" handling code. These both depend only on the "win" and "intuimsg" to do their work, so we've factored the code into the functions "doGadgetUp()" and "doMenuPick()". Both of these take a "struct Window*" and "struct IntuiMessage*" as arguments, and are passed the "win" and "intuimsg" that they need.

These changes again help to make the code easier to maintain. As the program grows in both complexity and in size we will need all the help we can get in keeping it readable and understandable, but still logical.

This month there's lots of scope for incorporating your own menus and gadgets. You might also like to try out some of the screen attribute tags (those beginning with "SA_" in the header file "intuition/screens.h"). See if you can work out how to make the screen a certain size and resolution, or how to set the colours of the pens. See you next month! ■

Jason Hulance

Next Month

CU AMIGA MAGAZINE

PowerUp

We told you it was coming, and it's finally here. phase 5's PowerUp accelerators bring the processing power of the Motorola PowerPC range to your Amiga, catapulting it into the forefront of personal computing once again. We'll be taking a thorough look at the first PowerUp cards to make it off the production line and onto the shelves.

POWER UP
AMIGA™ GOES POWER PC™

AMIGA XG PROJECT

Further adventures in DIY

Following this month's fascinating AIR Link project, the portable Amiga and Project XG, we'll have yet another exciting adventure in do it yourself Amiga gear, but we're not going to spoil the surprise just yet...

TFX gets serious

Now you've got the hang of the basics and mastered the state of the art weapons systems, we'll be taking our TFX tips to the next level, with tips and guides to take you from Rookie to Top Gun.

December issue on sale 13th November

Contents are subject to change without notice.

Wired World

This month we take a little break and look at the lighter side of the Net, multiplayer gaming.

While writing this, the European Computer Trade Show is in full swing. The ECTS, as it's commonly known, covers every aspect of computer and console gaming.

On this footing, we've decided to put the technical Net tutorial on hold for a time and check out the Amiga, games and the Internet.

Gaming on the Net is a big thing on the PC and it's even coming to consoles with plug in modems etc. It's quite obvious that the Amiga is ideal for Net games with superb Net connectivity and the multitasking to hold it together with a game.

▲ Foundation promises proper TCP/IP network game playing, we can't wait.



BattleDuel V1.6.100 Copyright © 1995- 1997 Jochen Terstiege, Michael David, Marco Seine

Network

Type TCP/IP

Phone 0123-50769

Host a3000.nowhere.de

Victories 0

Barrel 0

Powder 200

Move

Damage 0

Wind 19

Victories 0

Barrel 0

Powder 200

Move

Damage 0

▲ BattleDuel, fantastic network gaming implementation, shame about the game.

It's also taken until now for people to think seriously about Amiga games on the Net. Discounting the promised but never delivered, Net Worms from Team 17. A game which is multiple player Internet compatible is one of the most entertaining possibilities to using the Net. This month we'll look at a couple of Amiga Internet playable games, how to create a Net playable game and what's coming for the future. It might be an idea to keep an eye on Paul Burkey's Amiga Net Games page at http://www.sneech.demon.co.uk/netlink.co.uk

Netris

It had to happen, Tetris gains Net support in this simple four player Tetris stand-off that uses AMarquee for the Net support. It's an extremely simple game, it won't even open on a screenmode of your choice but it does show how easily that a network game can be written with AMarquee. You can find Netris on the Aminet in the path comm/net/Netris1.11B.lha or on the cover CD-ROM as usual.



HIGH SCORES

1. Anonymous
72 (7)

Anonymous
72 (7)

▲ Netris in all its graphical glory.

FreeCiv

comm/tcp/Freeciv10.lha

FreeCiv is a port of a unix clone of Microprose's Civilization. It allows up to fourteen players to play a game simultaneously over the Net. Sound good, well it's not only good but it's free and generating considerable interest in the Amiga Net community. So what do we need to get FreeCiv up and running?

You will need a 68020 or better, AGA or better, AmigaOS 3.0, MUI 3.8 or higher, an AmiTCP compatible TCP/IP stack (Miami), a GIF datatype and the ixemul and ixnet library V46 or higher. This is fairly straight forward but we also need a 24-bit aware picture.datatype commonly referred to as V43 compatible after the CGraphX picture datatype. Users of CGraphX can use the V43 picture datatype, Picasso 96 users already have one and in fact AGA users can use the Picasso96 picture datatype from the Picasso archive. This can be found on the Aminet in gfx/board/Picasso96.lha.

Here's what you need to get FreeCiv running and the complete FTP paths, including the stupidly convoluted path to Ixemul 46, 45 is the latest on the Aminet.

From ftp.ninemoons.com
Ixemul 46.0 /pub/geekgadgets/970414/amiga-bin/ixemul-46.0-bin.lha. From the Aminet
FreeCiv 1.0 comm/tcp/Freeciv10.lha
Picasso 96 gfx/board/Picasso96.lha
GIF datatype
util/dtype/ZGIFDT39.18.lha
MUI 3.8 util/libs/mui38usr.lha

Naturally all this software can be found on this month's cover CD-

AMarquee

One of the reasons that Net gaming has been so slow in taking off on the Amiga is that games programmers often have no experience of accessing the Net via whatever TCP/IP stack the Amiga is using. Jeremy Friesner has come to the rescue with a shared library and daemon system called AMarquee. This handles the technicalities with communicating on the Net and provides a simple communication method for games programmers.

Gaining access to AMarquee naturally requires that the game, or parts of it, be programmed in C. Examples are provided and the archive itself will install AMarquee into a users AmiTCP or Miami quickly and easily. The result being that AMarquee leaves the programmer to concentrate on the game and not waste time implementing networking code.

AMarquee is available in the Aminet path, comm/net/AMarquee1.43.lha and on the cover CD-ROM. There's already some small games using the system, so hopefully it won't be too long before some of the larger games catch on. Perhaps ClickBoom will consider AMarquee for Net support in their conversions of top PC games such as Quake and Red Alert.



60,000 People
Year: 3520 BC
Gold: 77, Income: 3
Tax:40 Lux:20 Sci:4

Settlers
Moves: 1
Tundra
London

Year: 3580 BC
Game: London is finish
Year: 3560 BC
Game: Sir, we can't bu

Science Advisor
Despotism of the English
Emperor Boris: 3520 BC

Bronze Working
Horseback Riding
Iron Working

▲ Here's a game of FreeCiv up and running. It's a hassle to install and get running but when it works it's the greatest Amiga network game to date.



```
PLAYING THE GAME:

There is kind of a basic strategy at
the beginning of the game or
at least; most players follow the
pattern below at the start of each
game.(depending upon server options
etc)

 0.  Where to build the first city.
 1.  Mapping the countryside
 2.  Defending the cities
 3.  Units to build first
 4.  Agriculture improvements
 5.  Where to build
 6.  Taking care of cities
 7.  Explorer the world
 8.  Keep in mind
 9.  Make your own strategy for the
game
```

▲ Thankfully there's some useful online help for FreeCiv also.

ROM. Once this software is installed, all that remains is to edit FreeCiv's icon tooltypes to enter a server to connect to you. One option to start with is to run the 'civserver' program locally and run FreeCiv without editing the tooltypes. Then your client will connect to your own server so you can play a game by yourself and get to know the ropes.

When you're ready to connect to another server, simply enter in their hostname in the SERVER= tooltype, save the icon and launch FreeCiv. Away you go! FreeCiv has excellent online help but it is a complex game. If you're not familiar with the original commercial Civilization then it may be somewhat confusing. However, it's definitely worth a bash as being turn based it plays perfectly over the Internet no matter the quality of connection.

Battle Duel

Battle Duel is an artillery/tank game that has full CyberGraphX and network support, lots of game modes, OS compliant GUIs and basically all the hall marks of a well programmed game.

Unfortunately the game itself is completely rubbish and is so utterly simplistic that I can hardly imagine anyone wanting to waste time and play against someone else on the Net. The graphics are fairly well drawn and the Net support is excellent but it seems this is where the authors ploughed all their efforts.

It's worth checking out to see how a modern Amiga game should be implemented in terms of features and networking. If only this front end was present on top of the superb Scorched Tanks or Charr AMOS artillery/tank games. Perhaps some day, a developer will take one of the excellent multiplayer games and add networking via Amarquee, we can only hope.

Battle Duel implements the Net communication internally and is extremely easy to use. You can find it on the Aminet at game/2play/BattleDuel.lha or on the cover CD.



▲ Gridlock is a quirky but fun game from CU's Soundlab contributor. Modem and network gameplay is on offer so try it out.

GridLock

GridLock is an older Net link-able game which is based on a rather unique puzzle style gameplay. Again it is not possible to change the screenmode and the program defaults to trying to play via a null modem link, however by manually adding an entry into AmiTCP or Miami's InetD database, Gridlock will play via the Internet.

It's an extremely good game and well worth a try between yourself and a friend, either locally or via the Internet. You can find it located on the Aminet at game/2play/GridLock.lha

Foundation

Paul Berkey's Foundation is coming along nicely as we went to press.

The God's-eye-view action strategic war game claims to mix elements of Settlers, Warcraft II, Command and Conquer, Populous and Mega-lo-Mania together along with several new ideas.

Now, we wouldn't even bother mentioning this much anticipated game if it weren't for the fact that TCP/IP network/Internet gaming support is being touted as one of its major features.

This could give the game a whole new lease of life with competing players building their towns, commanding their subjects and ultimately sending them into battle against the opposing players.

Some other features slated in addition to the network gaming as proper CGraphX, even AHI sound card support and the novel idea of in game mug-shots from many individuals in the Amiga community. Foundation could be hot news on the Net this Christmas, meanwhile we've got FreeCiv to tide us over in the meantime.

Foundation is due to be released round about November and you can see Sadenesses Foundation web site at http://www.sadeness.demon.co.uk/foundation.html if you would like some further information. ■

Mat Bettinson

Surf's Up!

Feast your eyes on this months gaggle of websites. Lurking below is a cool E-mail client and a groovy co-op.

Net God speaks

I don't need to remind Amiga users that even the most powerful 68060 based machines don't compare favourably to the latest PCs and workstations. At least not in the CPU stakes. This in mind, it seems strange that there would be an Amiga team entered into the RC5 Secret Key challenge. Until you consider that the Amiga RC5 team is actually a study in the Amiga Net community and its ability to pool resources and organise a common campaign. All around the world, Amiga users are bending University and Work mainframes to the Amiga RC5 cracking effort. Hundreds more Amiga users have their Amigas chugging away at the RC5 cracking client in the background. All this is before the Bovine RC5 cracking client is ported to the PowerPC which is due before you read this.

If the Amiga can reach #6 in the daily stats with CPUs that are several years behind, imagine what they could do with PowerPCs. It's heartening to see the Amiga Net community stands together for a common goal. Give us the next generation hardware and they'll be no stopping us!

No Amiga to Waste

No Amiga to Waste is a brand new Web site which is designed to be a place where both developers and users can come together as one, in order to share ideas and comments with each other. It appears to work on the basis that there are Amiga developers who don't know what to write and so they go to the No Amiga to Waste site to get some idea for a new, forward thinking super application that the Amiga should have.

No Amiga To Waste plans to implement a source code database, a development tips database and also an on-line help/chat system via the web site and IRC. During the meantime, Amiga users can includetheir own suggestions to a variety of different categories of applications via the web interface.

The No Amiga To Waste's home page can be found at **http://thunderstorms.org/NATW/**

Eucalyptus

Eucalyptus is a new ClassAct based E-mail client which does look incredibly impressive for a newcomer to the scene.

Starting out multi-threaded and MIME compliant is a very good start but the clean and functional ClassAct based GUI also adds to the professionality of the new program. Eucalyptus is in public beta as of going to press, it requires OS 2.04, the ClassAct GUI classes (supplied) and only a single megabyte of RAM.

Recently the POP mail download functions of Eucalyptus have been activated so that the package is fully operational for standard E-mail use. If you fancy a crack at a good looking new E-mail client and don't mind doing a bit of beta testing yourself, check out the author's home page at **http://www.geocities.com/SiliconValley/Pines/3517**



```
Aminet        21 messages, 2 unread (398.0 KB)
Incoming      No messages
  Family      71 messages, 2 unread (130.4 KB)
  Friends     18 messages (35.4 KB)
Isengard      4 messages (3.2 KB)
  Luminus     2 messages (2.3 KB)
  Ax          4 messages (7.8 KB)
  Eucalyptus *29 messages (455.2 KB)
  GetSize     No messages
Jokes         28 messages, 6 new, 15 unread (112.7 KB)
 ~HumorNet    11 messages, 6 unread (202.4 KB)
Misc          17 messages, 1 new, 3 unread (67.9 KB)
  Voodoo      2 messages, 1 unread (4.7 KB)
  Picasso     419 messages, 144 new, 252 unread (1.2 MB)
  PGP         52 messages, 30 unread (224.8 KB)
  Newsletters 5 messages, 1 unread (177.6 KB)
  ADE         No messages
  Geocities   3 messages (3.7 KB)
  Java        23 messages, 4 new, 9 unread (97.6 KB)
Outgoing      1 message (680 bytes)
Postponed     No messages
Programming   No messages
  ClassAct    77 messages (198.2 KB)
  Developers  82 messages, 25 new, 11 unread (187.3 KB)
Sent          84 messages (307.5 KB)
```

Amiga RC5 effort

The RSA Secret Key Challenge is a competition from the American RSA cryptography company to prove that the current encryption schemes are insufficient for the Net. The US government endorsed DEC encryption standard was cracked early on by the 1997 Secret Key Challenge. This involves RSA offering prize money for cracking the key. From here, collaborating efforts arise on the Net which co-ordinate the CPU horsepower from many computers towards a brute force cracking effort.

While DEC has been cracked, the RC5 algorithm is next under attack for a total prize money of $10,000. The leading effort to crack this RC5 key challenge is the Bovine group. Bovine is a multi-platform, multi-client effort which has the Amiga well represented.

There is an Amiga version of the cracking client but due to the astronomical quantity of CPU power required, the Amiga RC5 team is more of an exercise in Amiga users pooling resources, usually other computers with extremely powerful CPUs.

CU Amiga Magazine has a variety of Power Macintosh's and 68060 based Amigas contributing over 2 million checked keys a second. CU Amiga is just one company devoting CPU power to the Amiga RC5 effort, greater still is the huge number of Amiga individuals which has pushed the Amiga up to #6 in the daily statistics and 67 overall. The Amiga RC5 team was still climbing quickly as we went to press.

To contribute yourself, check out the Amiga RC5 team home page and the other relevant pages. Here's a list.

Surf of the Month

Mat Bettinson roots out some of the better Net sites... Move, and the teddy gets it!

First the **UK Robotics Club** home page is a pretty ordinary affair with little to recommend in it. The entertainment lies in the list of members where you can teleport yourself to their home pages.

There I found loads of details about an American robotic's competition called 'Robot Wars 97'. In this competition one doesn't compare engineering skills, oh no. If your robot can summarily dispose of the other robots, you win! There's several weight classes, manual, automatic and the incredible all-against-all melee rounds.

In addition to **The Robot Wars Home Page** I discovered a whole bunch of other cool sites about the entries, including the winner of the Robot Wars 97 heavyweight class **Biohazard**. For some reason this chap's ISP complained about his DIY Tactical Nuclear Warheads pages. Still, stay tuned for the next CU Amiga DIY scene.

David R! Woloschuk is a Canadian student with an exclamation mark in his name. Obviously studying the 'Visualisation of Parallel Program performance' proved too much and so he turned to cartoon strips in his clearly copious spare time.

The **After Life of Bob** is a sequential comic strip story that tells of the afterlife of an American student who appears to die in the first episode. If you'd like to find out how and what happens next, then check out the archive at this website.

▲ Top: Wedge of Doom wins featherweight championship. Below: The heavyweight champion 'Biohazard'.

▲ Scant seconds before teddy meets the business end of a 10,000 rpm diamond cutting saw, these guys play for keeps!

Where has **Movie Critic** been all my life? It requires you to register by rating at least 12 movies. Big deal? Wrong! After that it will present to you a selection of movies which it thinks you will love and hate, on the big screen and small. It hit a golden bull's eye on every count for me though I needed to rate 25 movies before it became accurate. This site is the absolute canine nether regions, so check it out for yourself.

On the Amiga front, Mark Wilson AKA Tecno, has been threatening to fire up an Amiga specific live advertisement site for some time. He's finally done it at the **AmiBench Adverts Page**, where you can place free live adverts for Amiga equipment and software and view various other adverts.

Interestingly enough it describes CU Amiga as 'One of the most vocal magazines left'. Hmm, thanks.

The database broke when I submitted an advert but it was fixed quickly, and up and running shortly after. It doesn't explain Mark's fixation with Hooch though. ■

Mat Bettinson – mat@mats.net



No Amiga To Waste
don't waste your thoughts

This Site is Sponsered by No Amiga To Waste

Welcome to Amibench

late last year, me and some friends had an idea for a web site Idea We have just started to release information on this project to the public for their help and most of all *ideas & comments*. This site will be nothing with out your help, so please do read about it, and please do email us here at Amibench, or how else are we going to get this site right?

Amibench at a glance

- Opening statement About AmiBench
- Feedback Get in touch
- Sell your Amiga hardware/software
- New information of what is going on at Amibench and in the Amiga world
- Buy Amiga hardware/software here!
- Internet Search Engines for the Amiga

▲ Buy and sell Amiga hardware and software, instantly, from Amibench.



PART: THE FOURTH -AWAKENINGS-
The story so far...
We met Bob. Bob met Death. Bob got Squished. Death talked about himself. Bob was put on trial. Bob was found guilty. Bob was sentenced to hell. Thats all for now.
OH, MAN!! WHAT A WEIRD NIGHTMARE!
HUH? THIS ISN'T MY PLACE! WHERE AM I AND HOW.. UH-OH!
I AM IN A STRANGE APARTMENT WITH NO RECOLLECTION OF HOW I GOT HERE. THERE IS ONLY ONE LOGICAL CONCLUSION: SOMEONE GOT ME DRUNK, TOOK ADVANTAGE OF MY HELPLESS CONDITION AND USED ME AS SOME PERVERSE NIGHT TOY! TRANSLATION: I PROBABLY SPENT THE NIGHT WITH SOME HIDEOUS DEMON THING FROM HELL!
HEY! WHO LIVES HERE? COME OUT NOW!!
whadda ya want... i don't have all day.
GLEARGH!
© Copyright 1994 David R. Woloschuk All right reserved. Made available for personal viewing only.
YOU REALIZE I DID NOT MEAN TO BE TAKEN QUITE SO LITERALLY.
shmuck
HEY! WHO ARE YOU?
OH, SORRY. PLEASE ALLOW ME TO INTRODUCE MYSELF, I AM A MAN OF WEALTH AND TASTE...
YOU CAN CALL ME LUCIFER, OR MR. DEVIL IF YOU PREFER.
"AND I'M HERE TO WELCOME YOU TO MY LITTLE NETHERWORLD..."
HELL
TAH-DAH
NEXT: A BRIEF TOUR OF HELL AND BOB IS EXPOSED TO PLEASURE AND PAIN!

▲ The life and times of Bob, the dead Canadian student.

URL's

After life of Bob
`http://web.cs.ualberta.ca/~davidw/ALoB/strips/strip_intro.html`

Movie Critic
`http://www.moviecritic.com`

AmiBench adverts page
`http://thunderstorms.org/AmiBench/index.html`

UK Robotics Club home page
`http://www.thomas-kay.demon.co.uk/`

The Robot Wars home page
`http://www.robotwars.com`

Biohazard Robot Wars entry
`http://www.webspawner.com/users/biohazardpage`

Another Robot Wars entry
`http://www.tinweb.com/robot/index.html`

Robot Snores – The loser's page
`http://www.phobe.com/robot`

Back Issues

Looking for a specific Amiga article, game review, program, feature, tutorial, or even news story? Your search could well be over...

JULY 1996
Disks: XiPaint & Primal Rage demo
Features: A special report on what's happening in Europe, & news on Visorp & Pios
Inside: Image FX 2.6, Surf Squirrel, A4000 Tower, Primal Rage, SWOS Euro and more reviewed.

AUGUST 1996
Disks: EasyCalc (full program) & Valhalla III demo.
Features: The future of the Amiga with VIScorp, the new PIOS machine and the second part of the Euroscene feature.
Inside: Siamese Twin, Photogenics 2.0, Valhalla III and Tin Toy reviewed.

SEPTEMBER 1996
Disks: Vista Lite (full program) & a demo of Brian Lara Cricket '96
Features: The Aminet exposed. All 6 gigabytes!
Inside: Final Writer 5, OctaMED SoundStudio, Atapi CD-Rom drive. Plus an exclusive preview of the new AGA Worms.

LIMITED STOCK!

OCTOBER 1996
Disks: Upper Disk Tools: ideal for sorting out those awkward disks and drives!
Features: The Amiga in America, Net software...
Inside: The speed issue, or something. Three top accelerators, a TCP/IP stack comparison & Capital Punishment

NOVEMBER 1996
Disks: XCAD 2000 - The premier 3D CAD package, plus Chaos Engine 2. CD-ROM or floppy edition
Features: Palmtop Amiga-Psion link-up
Inside: Opus 5.5, Delfina DSP sound card, Web Browser War, Alfa Quatro, CD-ROM writer

DECEMBER 1996
Disks: Wordworth 3.1 SE, Worms demo. CD-ROM or floppy edition
Features: CD-ROM drive for £50! Amiga and PC games on CD-ROM
Inside: Draw Studio, Apollo 1230, Storm C, Siamese RTG system, Tiny Troops

JANUARY 1997
Disks: CD-ROM or floppy edition, Imagine 4.0, Underwater Capers, plus over 100Mb of Imagine extras on CD
Features: Get a job in graphics, plus Imagine 4.0
Inside: Art Effect, PPaint 7, SWOS 96-97, Fighting Spirit, Chaos Engine 2 ...

LIMITED STOCK!

FEBRUARY 1997
Disks: Design Works, Minskies Furballs plus Worms – the Director's Cut extras and Imagine extras on the CD.
Features: The new A/Box
Inside: Wordworth 6 Office, Turbo Calc, Minskies Furballs, Bograts reviewed.

MARCH 1997
Disks: OctaMED SoundStudio (full program) Chaos Engine 2, Chaos Engine 2 AGA demo
Features: Turn your Amiga into a pro studio. Printers: problems solved.
Inside: Quickcam, Cybervision 3D, SMD 100, JetPilot reviewed



APRIL 1997
Disks: Directory Opus 5.11 (full program). Tiny Troops demo
Features: Build your own Tower Amiga Part 1. The 50 best Amiga Games
Inside: Massive Cinema 4D 3.0 Review, new DTP series, ProGrab Sampler, Teletext Decoder

MAY 1997
Disks: Image Studio (full program) Kargon RPG, exclusive clipart on CD
Features: The Future's Bright: Gateway buys Amiga! Tower Amiga Part 2.
Inside: PageStream 3.2, Big Red Adventure, LightWave 5, Epson Stylus 600…

JUNE 1997
Disks: Pro Page 4.1 (full program) MPEGA 2.4, Sysinspector, The Sun game & more!
Features: CD-R for Amiga – cut your own CDs for a few hundred pounds plus Tower Amiga Part 3: Zorro.
Inside: Turbo Print 5, Net Connect, Cybervision…

JULY 1997
Disks: Free Net sofware, Quarterback 6.1 inc QB tools, Big Red Adventure
Features: Total Internet Solution, the history of the Amiga & a look at Amiga artist, Eric Schwartz.
Inside: Final Writer '97, Siamese RTG 2.0, Burn It…

AUGUST 1997
Disks: Dogfight, Turbo Print 5 Lite, Storm C Compiler
Features: Power PC is coming, Crack the Code, plus Power Gaming
Inside: Cinema 4D, Voyager NG 2.90, IBrowse 1.12 & Tower add-ons…

SEPTEMBER 1997
Disks: Sixth Sense Investigations, Vista Pro, MakePath, GeoMorph
Features: New Faces of Amiga Gaming, Amiga: The Next Generation, DIY Sound Card
Inside: Art Affect 2, Art Studio 2.5, Micronik genlocks, Flying High

OCTOBER 1997
Disks: TFX, TB 303 Emulator, Virus Z, Video Easel, Visual Prefs
Features: TFX: Quickstart Guide/Techniques & Tips etc., Suzanne: The Portable Amiga
Inside: Fusion Mac Emulator, Civilization, Mk II EZ Tower, Storm C

Priority Order Form

Complete this form and send it with your payment to: CU Amiga Magazine Back Issues, Tower Publishing, Tower House, Sovereign Park, Lathkill St, Market Harborough, Leics. LE16 1EF. Tel: 01858 435 350.

Please rush me the following issues of CU Amiga Magazine

Issue date & type (CD or disk)	Quantity	Price
	Total price:	

Please allow 28 days for fulfilment upon receipt of request. All orders subject to availability.

☎ 01858 435 350

*Rates: UK: £5.99 Europe and rest of world: £6.50. Except for CD-ROM editions: UK £6.99 Europe and rest of world: £7.50. All prices include postage and packing. Disks/CDs are included with all orders. CD edition is available for the April 1996 issue, and monthly starting from the November 1996 issue.

Method of payment

☐ Visa ☐ Amex ☐ Access ☐ Diners Club card ☐ Cheque (£ Sterling)

Card no .... Expiry date ....

Signature .... Date ....

Please make cheques payable to EMAP Images Ltd.

Title .... Initials .... Surname ....

Address ....

....

.... Postcode ....

Daytime telephone number (including STD code) ....

White Knight Technology

AMIGA & Video Editing Specialists
FREEPOST ANG6387, WARE, HERTS, SG11 1YA

Phone
01920
822 321
9.30 - 5.30
Mon - Fri

Fax 01920
822 302

Email
White_Knight_Tech
@CompuServe.Com

Next Day Delivery From Just £ 5.00

WE ACCEPT
Mastercard
Visa, Delta
and Switch
2.5% Surcharge
on **Credit** cards,
Not Switch / Delta

All Prices Include VAT @ 17.5%

We Supply The Entire Range of Accelerators & Graphics Cards From :

BLIZZARD Accelerator Series · phase 5 DIGITAL PRODUCTS · CYBERSTORM PPC · CYBERVISION PPC · POWER UP AMIGA™ GOES POWER PC™ · BLIZZARD 603e+ PowerBoard · CYBERVISION64/3D · CYBERSTORM MK3

68k Series Accelerators

For A3000 / A4000

CYBERSTORM NEW

NEW CYBERSTORM MK3	
68060, 50MHz, Ultra & Wide	
SCSI interface onboard	£ 519
MK2 SCSI-2 Controller	£ 65

For A1500 & A2000

BLIZZARD 2060 Turbo Board

BLIZZARD 2060	
68060, 50MHz + SCSI	£ 409

For A1200 Only

BLIZZARD 1260 Turbo Board · BLIZZARD 1230 IV Turbo Board

BLIZZARD 1260 & 1230-IV	
68060, 50MHz	£ 335
68030, 50MHz	£ 99
SCSI Controller	£ 65
FPU for 1230-IV	£ 46

NEW PPC Accelerators

For A1500 & A2000

BLIZZARD 2604e PowerBoard

Expected Release Date 10/97

150MHz PPC 604e & SCSI-3	
with 68060, 50MHz	£ 769
with 68040, 40MHz	£ 599
with 68040, 25MHz	£ 569
180MHz PPC 604e & SCSI-3	
with 68060, 50MHz	£ 849
with 68040, 40MHz	£ 679
with 68040, 25MHz	£ 649
200MHz PPC 604e & SCSI-3	
with 68060, 50MHz	£ 939
with 68040, 40MHz	£ 769
with 68040, 25MHz	£ 739

Also available without 040/060 and as an upgrade for Blizzard 2040 / 2060 owners

NEW PPC Accelerators

For A3000/T & A4000/T

CYBERSTORM PPC

Now Shipping !

150MHz PPC 604e & SCSI-3	
with 68060, 50MHz	£ 755
with 68040, 40MHz	£ 585
180MHz PPC 604e & SCSI-3	
with 68060, 50MHz	£ 825
with 68040, 40MHz	£ 655
200MHz PPC 604e & SCSI-3	
with 68060, 50MHz	£ 915
with 68040, 40MHz	£ 745

POWER UP AMIGA™ GOES POWER PC™

Phase 5 PPC Accelerators are also available without a 68K CPU, for existing 030, 040 or 060 accelerator owners. Call us for further details. If you already have a Cyberstorm or Blizzard, please call us for special upgrade prices.

150MHz PPC 604e & SCSI-3	
No 68k Series CPU	£ 509
180MHz PPC 604e & SCSI-3	
No 68k Series CPU	£ 579
200MHz PPC 604e & SCSI-3	
No 68k Series CPU	£ 669

CYBERVISION PPC

Details to be announced. Call

For A1200 Only

BLIZZARD 603e+ PowerBoard · BLIZZARD 603e PowerBoard

Expected Release Date 11/97

Upgrade available from Blizzard 1230/ 40/60

175Mhz PPC 603e & SCSI-2	
with 50MHz 68030	£ 349
without 50Mhz 030	£ 309
200Mhz PPC 603e+ & SCSI-2	
with 68060, 50MHz	£ 659
with 68040, 40MHz	£ 489
Without 040/060 CPU	£ 399

24-Bit Graphics Card

CYBERVISION64/3D

For A1500/2000/3000(T)/4000(T)

CYBERVISION 64/3D	£ 155
CV 64/3D Scandoubler	£ 65
CV 64/3D MPEG Decoder	£ 125

Hard Drives (3.5") Bare SCSI-2 & ULTRA

Many Lower Prices

1.2Gb SCSI-2	Quantum	£ 195
2.1Gb SCSI-2	Seagate	£ 235
3.2Gb SCSI-2	Quantum	£ 299
4.1Gb SCSI-2	Micropolis	£ 449
4.3Gb SCSI-2	Slow Microp.	£ 315
4.5Gb SCSI-2	Micropolis	£ 515
9.1Gb SCSI-2	Micropolis	£ 849

WIDE SCSI DRIVES ON REQUEST

Hard Drives (3.5") Bare E-IDE - For Amiga 4000

These drives are NOT suitable for A1200

Many Lower Prices

1.6Gb E-IDE	£ 155
2.1Gb E-IDE	£ 165
2.5Gb E-IDE	£ 170
3.1Gb E-IDE	£ 210
4.0Gb E-IDE	£ 230

Hard Drives (2.5") Bare E-IDE - For Amiga 1200

1.4Gb E-IDE	£ 175
1.8Gb E-IDE	£ 195
Cable, S/W & Screws	£ 9

Only when purchasing drive !!

CDROM Drives (Bare)

Internal Fitting - **NOT** for A1200

12 x Speed SCSI-2	£ 125
SCSI-2 CD Writers	From £ 299
8 x Speed ATAPI/IDE	£ 75
12 x Speed ATAPI/IDE	£ 79
16 x Speed ATAPI/IDE	£ 85

Cartridge Drives (SCSI)

SyJet 1.5Gb Ext. + Cable	£ 375
SyJet 1.5Gb Int. + Cable	£ 285
SyJet 1.5Gb Cartridges (x 3)	£ 245
ZIP 100Mb Ext. + Cable & Term	£ 135
ZIP 100Mb **NEW** Internal	£ 135
ZIP 100Mb Disks (x 6)	£ 75
JAZ 1Gb Ext. + Cable & Term	£ 375
JAZ 1Gb Internal 3.5" version	£ 285
JAZ Disks (x 3)	£ 245
EZ Flyer 230Mb Ext. + Cable	£ 145
EZ Flyer 230Mb Disks (x3)	£ 70

ALL DRIVES SUPPLIED WITH ONE DISK

Networking

HYDRA Zorro Ethernet	£ 175
Ariadne Zorro Ethernet	£ 179
A1200 PCMCIA Ethernet	£ 149

Memory SIMMS

8Mb, 72 pin, 60ns	£ 40
16Mb, 72 pin, 60ns	£ 70
32Mb, 72 pin, 60ns	£ 120

Genlocks

LOLA 2000 SVHS & VHS	£ 349
LOLA 1500 VHS Only	£ 179

electronic-design

SIRIUS SVHS & VHS Plus Audio & Chroma Key. Software control.	£ 699
NEPTUN As Sirius, but without audio & Chroma Keyer.	£ 529

Now Available Again

AMIGA 4000T

With 040/25, 6Mb, NO HD
£ 1,179
Without CPU, 6Mb, NO HD
£ 1,049
Add Cyberstorm, Drive & RAM

Monitors

17" Microvitec 1701	£ 439
17" Hi-Res SVGA	£ 439
15" Hi-Res SVGA	£ 199
14" Hi-Res SVGA	£ 165

Amiga Software

ART EFFECT 2	£ 149
MAINACTOR BROADCAST	£ 169
AMIBACK 2 Backup S/W	£ 30
TWIST 2 Relational Database	£ 50
MULTIMEDIA EXPERIENCE	£ 40
TURBOCALC 3.5 S/sheet	£ 25
INFONEXUS 2 File Manager	£ 15
WORDWORTH V5	£ 20
PERSONAL PAINT 6.4	£ 10
CLARISSA Professional V3	£ 179
ADORAGE V2.5	£ 109
MONUMENT DESIGNER V3	£ 239
MONUMENT CREATIVE CD	£ 69
ANIMAGE V1	£ 99
ADORAGE MAGIC Movieshop	£ 79
ADORAGE MAGIC Casablanca	£ 79

Miscellaneous H/W

PICASSO IV 24-Bit Graphics Card with Flicker Fixer	£ 289

Specifications ?

If you need technical details on any of our products, call us on 01920 822 321

White Knight Technology are renown for excellent product knowledge, service & honesty.

We Still Support The
AMIGA

Please Call To Verify Price & Availablility before sending an order.
Minimum Order Value £ 50 + P&P
Many prices subject to exchange rate
E & O E - 17/09/97

Sound Lab

Image Processing Techniques for Audio

Requires: SOX, Play16 & ImageFX



It sounds like we've got our wires crossed, but no, you can use image processors to mangle your samples!

Normally if you wanted to edit a sample, you would use some sample editing software naturally enough. However, if you have exhausted the effects and options offered by your audio software and are still hungry for new ways to customise your sounds, here's a suggestion.

Image processing software provides all sorts of interesting functions for manipulating images: morphing, rippling, convolutions, etc. What if we could apply some of these processes to audio files? It is a great idea, but if you try to get an image processor to load in a standard format audio file it is not surprising that it will fail. But that does not mean it is impossible...

From the computer's point of view, image data and audio data are no different from each other. It is all just numbers to a computer. As far as the computer is concerned, you could just as easily listen to an image file as look at one. Unfortunately though very little, if any, software allows you to directly do these kinds of things. But, with a little creative exploration it can be done.

It works like this...

Before we get started, it is important to understand some of the inner-workings of this process.

There is one major difference between audio and image data. Audio files are single dimensional, in that they are played back one data item (sample) at a time in a continuous stream (width). Images, however, are two dimensional in that they have width and height and are displayed as such. In order to relate the two, we need to understand how audio and image processing software handles data differently.

For discussion purposes, we will use a small sampling of raw data (Figure 1). As audio data, this is processed as a single stream of data played back from left to right.

In order to use this as image data though, it needs to have width and height. We want to be sure to use all the data, so it is necessary to choose our dimensions appropriately.

Figure 1:
0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

We will start with a simple example that simulates the single dimension of audio data to recreate a simple reverse waveform audio effect. To do so, we will use width = 16 and height = 1. The image processor's equivalent of reverse waveform is the flip function. A horizontal (left-right) flip of the data in Figure 1 will result in the data in Figure 2.

This gives us the reversed waveform that we wanted. Note that a vertical flip would not have altered the data at all. Alternatively, we could have used width = 1 and height = 16 with a vertical flip, to achieve the same effect. Read on to find out why.

Figure 2:
15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0

That was interesting but not very exciting or new. We could do this much easier with most audio waveform editing software.

To better demonstrate the usefulness of using image processing in this way, we will start again, but with width = 4 and height = 4. When loading the raw data in Figure 1, the image processor will arrange the data in a table based on the dimensions you give it. Data will be read in column by column, skipping to the next row when the full width is reached. If there is insufficient data, the remaining will be filled with zeroes. If there is too much data, the extra will be ignored. In this case, we have just the right amount of data, arranged as in Figure 3.

Figure 3:
0 1 2 3
4 5 6 7
8 9 10 11
12 13 14 15

Because the data is now arranged two dimensionally, a horizontal flip (a single dimension operation) will have a different effect, resulting in Figure 4. If we were to then reorganize or store this data one dimensionally, we would have data as in Figure 5. This will cause some interesting things to happen to the sound.

Instead of reversing the whole waveform as before, it divides it into four separate parts with four values in each and reverses each part individually, all in one simple step. To do the same thing with an audio waveform editor would have required four reverse processes each with a different set range.

Figure 4:
3 2 1 0
7 6 5 4
11 10 9 8
15 14 13 12

Figure 5:
3 2 1 0 7 6 5 4 11 10 9 8 15 14 13 12

In order to do a proper waveform reverse with data organized in two dimensions, it is necessary to flip both horizontally and vertically. If we now flip the data from Figure 4 vertically (up-down), we get Figure 6. Storing this data gives a reverse waveform, again, as in Figure 2.

Figure 6:
15 14 13 12
11 10 9 8
7 6 5 4
3 2 1 0

Now that we have a better understanding of what happens internally, we will try working with some real data. For this tutorial we will use ImageFX 1.52 from the coverdisk of June 95 CU Amiga cover disk to do the data manipulation.

However, the methods described here can be easily applied to most image processing programs. We will also be using two audio utilities included in the SoundLab directory of this month's cover CD: Play16 for audio playback and SOX for audio format conversion.

STEP 1: Preparing the audio file.

The problem is that it is very unlikely that you will find an AIFF, WAV or other audio file format loader or saver in an image processor. It is also unlikely that you will find an image data loader or saver in an audio processor. Fortunately, there is a storage format that is common between audio and image data formats and that is RAW.

We have included a sample IFF audio file for this tutorial: Piano.iff (seen in Figure 7 as it appears when loaded as a RAW graphics file). It is an 8-bit sound with a sampling rate of 16,780. To begin, we need to con-





Figure 10

vert the sound file to RAW format. SOX is smart enough that it will recognize what we want it to do, so from the CLI:

```
SOX Piano.iff Piano.raw
```

is sufficient. This will result in the creation of a new file called Piano.raw.

STEP 2: Loading the audio file.

Most image processors do not specifically contain a RAW module, and ImageFX is no exception. The SCULPT image format, however, is a RAW data format and ImageFX contains two SCULPT modules: SCULPT GREY and SCULPT RGB.

The difference between the two is that SCULPT GREY is an 8-bit data format while SCULPT RGB is 24-bit. Because our sample audio file is 8-bit, we will be working in greyscale. Load Piano.raw. When prompted for the format, select SCULPT GREY (Figure 8). Because the RAW image format does not contain the dimensions, ImageFX will prompt you for the width and height.

It is important to use dimensions that are large enough to accommodate the entire audio file. Generally, we want dimensions such that WIDTH * HEIGHT = RAW BYTES. Piano.raw is 86,700 bytes so enter 300 for the width and 289 for the height (see Figure 9).

We have instructed the software to load this audio data as an 8-bit greyscale image, so the data will be represented as shades of grey. When loaded as an image, the Piano sound looks very different (see Figure 10).

STEP 3: Processing the loaded data.

To perform a reverse process on the sound we need to use the horizontal and vertical flip transformations, as explained earlier. Select Transform (see Figure 11) and then Flip Horizontal. Then Transform, again, and Flip Vertical (see Figure 11).

STEP 4: Saving the data.

In order to playback the new reversed sound we need to save it as a RAW data file. Select SAVE and then SCULPT for the Save Format. ImageFX knows that this is a greyscale image so it will use the appropriate SCULPT GREY 8-bit format. Select SAVE AS and name the file Piano-Backward.raw.

STEP 5: Listening to the modified sound.

We could convert the new RAW file to IFF format using SOX before playing it back, but it is not necessary. However, because the sound is in RAW format we have to tell the audio player what sampling rate to play it back at. Entering the following in the Shell will do the trick:

```
Play16
FREQ=16780
Piano-
Backward.raw.grey
```

We have used the original sampling rate of Piano.iff for reference here, but you can try whatever rate you want. Note that ImageFX automatically appends a suffix ".grey" to the name you give it.

STEP 6: The weird and wonderful.

Earlier we talked about the strange effect that happens if we only flip in one direction. To hear it, do one more FLIP VERTICAL transformation and save it as Piano-Horizontal.raw. Because we have already done a vertical transformation once, we are now flipping it back again. Effectively, doing just a horizontal flip. To hear this weird thing enter this in the Shell:

```
Play16 FREQ=16780 Piano-
Horizontal.raw.grey
```

AMIGA
MAGAZINE
IMAGE FX
WORTH £249!
We show you how to manipulate scans and clip art like this!
IMAGE FX 1.5
IMAGE FX 1.5
PLUS!
AMIGA RESCUED!
NO DISKS ATTACHED? ASK YOUR NEWSAGENT
Games:

▲ **If you thought you'd got the most from our ImageFX 1.6 cover disk, think again: it can be a sample manipulator too!**

We have only touched on the basic procedure here. Next time, we will delve a little more in depth into this process. In the mean time, explore this technique further and if you come up with anything particularly exciting please drop me an email.

These ideas are presented only as a guide to possibilities. Hopefully they will be used as a starting point to something new and wonderful. ■

Dhomas Trenn

You can contact Dhomas via E-mail at dhomas@youngmonkey.ca

Next month

You've made a funny piano sound – so what? Well next month we'll be following up the theory with plenty of examples of how ImageFX can be used to really chew up your sounds like nothing else.



Image Width (Pixels): 300

Image Height (Pixels): 289

Figure 9



Figure 11

Desktop Publishing

Professional Page 4.1

PART 7

Helping you put words on your page is Larry Hickmott with a processor that is both integral to ProPage as well as a standalone utility.

Word processing and desktop publishing go hand in hand and Professional Page gives you the best of both worlds with not only a powerful page layout program, but also a very useful word processor called Article Editor (or AE for short).

AE can be used in two ways. One as an integral part of Professional Page where text on the page can be sent to AE for further editing and spell checking. The second way of using AE is as a standalone text editor stroke word processor. The only function that's missing for this latter use is printing, but that isn't such a problem as any text file produced in AE can be printed out using any word processor or DTP application.

Using AE as a stand-alone program also stretches to editing scripts and so on for your Amiga. I, for example, have AE linked up to my file manager so that when I need to edit my Start-Sequence and so on, I can do so using AE and the click of a right mouse button on a file. Having suffered from using Ed, I can heartily recommend AE for adding assigns to the User-startup and such like.

You can do this too, because unlike most word processors these days, AE is text based with the files it produces being ASCII, the most basic form of text you are likely to use. This also enables you to create ARexx "genies" for use in ProPage with AE.

Getting the most from AE though does require some knowledge of its inner workings and although I don't have enough space here to explore everything, the following should help you get more from the program.

Word power

Lets start looking at AE from a Professional Page perspective. That is, using AE from Professional Page rather than a stand alone program. The idea behind AE is that when large amounts of text are required, it is generally better to type it into a text based environment (like AE) rather than on screen in Professional Page. This is especially so if you're Amiga is not accelerated and your monitor is a single scan job (like a 1084) or even a TV set.

Lets say you have a letter to write containing hundreds of words. You can create the letterhead in Professional Page but write the letter in AE before placing it on the page to print. The way to utilise AE for such a task is as follows.

Before you can send text to AE, you need to create a box on your page. Make sure the box is created using the Box tool which is on the top left of your tool box and not the Rectangle tool used for creating structured boxes. Once a box is created, click on the Text tool and click once inside the box where you want the text.

You can now starting typing in Professional Page or choose the "Article Editor" item from the Edit menu to take you to AE. I use the short cut which is the "Right Amiga" key and the "forward slash-question mark" key pressed down at the same time. This keyboard combination works for sending text to AE as well as from AE back onto the page in Professional Page.



▲ To send text to the Article Editor known as AE on disk, choose from the Edit menu the item "Article Editor". The short-cut for this is "Right Amiga-/".



Options for "Professional Page Text"

Insert Mode ON
Save Icons YES
Cursor Flash FAST
Cursor Width
Numeric Keypad Digits
Tab Spacing 4
Text Color
Page Color
Border Color
Title Color
Style Codes Active
Paragraph Symbol ¶

▲ Various aspects of how AE works and looks can be controlled from the Options requester which is opened by choosing "Set Options" from the Special menu.

Here's looking at AE

Once you have AE in front of you, there are some worthwhile things you should know about this application. Lets discuss how it looks on your screen. Because I run a Productivity screen mode, I have AE open up on Workbench. This is done by choosing Screen



Workbench Screen

TransSpell 1.1

```
TransSpell 1.1
© 1994 GOLD DISK INC.
All Rights Reserved
```

```
AE is a wonderfool program.
```

Checking words

wonderfool

Not found

Guesses

wonderful

No more words found.

27 / 55%

▲ AE isn't that font sensitive. However, the importance of this screen shot is to highlight the "Guess Spelling" button, which brings up a list of words or word for you to choose from. If none are correct, retype the word in the text gadget containing the misspelt text.


Workbench Screen
TransSpell 1.1
TransSpell 1.1
© 1990 GOLD DISK INC.
All Rights Reserved
Professional Page Text
Checking words
Nowra
Not found
☐ Accept
☐ Accept & Remember
☐ Guess spelling
QUIT
242 / 5%

```
Unique Words

colour
colours
Amiga
Commodore
ZX
Datsun
Nissan
Hickmott
Larry
CU-Amiga
AmigaEm
DrawStudio
Kodak
RAM
CPU
PageStream
gigabyte
megabyte
Wordworth
Stylus
Epson
DTP_Toolbox
GrabIFF
Nowra
Brisbane
Broncos
London
Bletchley
Gairloch
```

▲ You will find that many words in common usage are not in the main dictionary. To correct this you can create a list of words, get AE to remember to each one as you spell check the file and then save that list to disk to be reloaded the next time you use AE.


Workbench Screen
Professional Page Text
TransSpell 1.1
TransSpell 1.1
© 1990 GOLD DISK INC.
All Rights Reserved
Save to...
/<PARENT>
AE
ARexx <DIR>
BasicCalendar.pp
British.dct
CGFonts <DIR>
Professional Page Text
CG Update
Drawer
File
PC1:
SD0:
PC0:
CD0:
RAM:
OK
Sort
Cancel
242 / 95%

```
DrawStudio
Kodak
RAM
CPU
PageStream
gigabyte
megabyte
Wordworth
Stylus
Epson
DTP_Toolbox
GrabIFF
Nowra
Brisbane
Broncos
London
Bletchley
Gairloch
```

Drawer DTP_ToolBox:PPage4.0

File mydictionary

▲ When spell checking a file, you may find AE overlooking words that you see as incorrect for your work but are nonetheless in the main dictionary and therefore deemed to be correct by AE. This can be avoided by using an Exception file, which is a list of words saved to disk and then loaded into the spell checker "Transpell" when required.


Workbench Screen
*Professional Page Text
TransSpell 1.1
TransSpell 1.1
© 1990 GOLD DISK INC.
All Rights Reserved
Save file
/<PARENT>
AE
ARexx <DIR>
BasicCalendar.pp
British.dct
CGFonts <DIR>
Professional Page Text
CG_Update
Data <DIR>
Documents <DIR>
Drawer
File
QDH2
QDH1
PC1:
SD0:
PC0:
CD0:
RAM:
JDH0
DF0:
DF1:
OK
Sort
Cancel
49 / 100%

```
can't
don't
won't
shouldn't
it's
didn't
wouldn't
```

Drawer DTP_ToolBox:PPage4.0

File Exception.dict

▲ Press "Right Amiga-6" and you will see as well as your text, style codes used by Professional Page which dictate how a piece of text looks on the page. Press "Right Amiga-7" in order to hide these codes.

Format/Workbench from the Project menu. There are two other choices available and when you have the one you want, choose Environment/Save Configuration also from the Project menu.

Continuing with the look of AE on your screen, lets now turn our attention to the Options requester which can be made to appear by choosing "Set Options" from the Special menu. From here you can set various settings like the colours of the background and text for example. You can also alter the width of the cursor and the speed at which it flashes. Icons for text files saved to disk can be created or not, depending on how you prefer to work. Just be sure that you choose Save Configuration after you make any changes.

Within AE, there are many other features worth mentioning. One of the simplest and yet most useful for me is the ability to insert a text file into your current text file. So many word processors do not allow you to do this directly but AE does. Most of my writing for features like this are written in the more powerful Protext but even it doesn't allow a direct insert text function like AE and it can be so annoying.

Spelling bees

Text typed into AE can also be checked for spelling mistakes. This is done by placing the cursor at the start of the text and then pressing Alt-8 or choosing "Spell check to End" from the Commands menu. Single words can be checked as well by pressing Alt-7. If the word is correct, a message "Spelling is correct" will appear in the status bar at the bottom of the AE window.

You will however, come across many words that are not in AE's extensive British dictionary. Whether it's a person's name or the title of your favourite city, it can be annoying if commonly used words continuously come up as not being recognised by AE's spell checker. A way around this is to click on "Accept & Remember" in the "Checking Words" requester. You can then save all the words you've told AE to remember, to disk so they can be part of AE's dictionary the next time you use the program. Saving the words to disk is easy. Once checking is finished, click on the Transpell interface which is a small rectangular box and then use the right mouse button to choose the Dictionary/Save menu item. The Dictionary menu is the middle one for Transpell. Give the file a name and then each time you use AE, load that file and your unique words will be there as part of AE's whole dictionary of words.

Exceptional

Also worth a mention is an Exception Dictionary. This again, is one you create and is used for compiling a dictionary of words which are in AE's main dictionary that you want AE to stop at when spell checking. Lets take the word 'can't'. You might have a situation where by abbreviations like this are out of the question and as AE won't tell you about them because the word is in its dictionary, you create an exception file with the word 'can't' in it.

This is done by using AE to create a list of words you want AE to pull out when spell checking a file. Save the file to disk and then use the Transpell Exceptions/Load menu item to load that file into Transpell. Now when you check a document which has the word 'can't' in it, AE will stop at it and ask you for the correct spelling.

Doing it in style

I expect many of you will not be aware that when you create a piece of text in ProPage, that internally, ProPage uses style codes to describe how that text looks on the page. These style codes are normally hidden from view but you can make AE show you these codes. This is done by pressing either "Right Amiga-6" to show codes or press "Right Amiga-7" to hide them.

This may not seem all that useful, but you can use this once you get to know all the codes and how it works, to format text within AE. Lets say you want a piece of text bigger. The code "\fs<24.000>" tells ProPage to make the text 24 point. You could change this while editing the text in AE to "\fs<12.000> and the text would then become 12 points in Professional Page.

On its own, this revelation may not be a lot of use but once you know all the formatting codes for Professional Page, it means you can create a piece of text with all the necessary codes in it and when this text is placed on the page in the main program, the text would already be formatted. I used this a lot in my early Professional Page days, when formatting text on slow machines was a real bind.

Time for one last major feature and that's "Search and Replace". AE enables you to look for a word or series of words, or if required, search for a word and replace it with another of your choosing. It can even look for a word that not only contains the same characters but is in the same case (upper/lower).

Precious time-saving

This search and replace function is a real time saver for many tasks, including times when you want to format text as explained earlier by using search and replace to substitute simple codes of your own making with the more complicated Professional Page style codes.

Before I go, I want to urge ProPage users to look very closely at this wonderful editor because I haven't seen a DTP program on any other platform with an editor that comes close and when you think how old AE is now, it just goes to show how good a job Gold Disk did.

Don't miss next month's exciting tutorial as we'll be looking at using pictures with Professional Page. ■

Larry Hickmott

ONLINE PD

PHONE FOR YOUR FREE 3 DISK CATALOGUE LISTING HARDWARE, PERIPHERALS & 17,000+ PD TITLES @ 75P PER DISK

TEL: (01704) 834335 or 834583

OR SEND 39p SAE

Fax/BBS: (01704) 834583

We also accept cheques, PO's & cash.

2 year warranty

56K Dynamode Fax Data Modem only £129.99 plus £7.50 p&p

75p p&p per PD order

75P PER PD DISK

WINNER OF AMIGA FORMAT GOLD AWARD

MODEM INCLUDES A FREE £35+ STARTER KIT

Every 10 disks ordered choose 1 FREE

Online PD, Dept CU11, Unit 5,
Embassy Building, 51A Piercefield Road,
Formby, Liverpool, L37 7DG

Convert your Amstrad

COLOUR MONITOR £10

Our custom made leads will convert your old Amstrad Monitor to work with your Amiga giving a crisp R.G.B. colour picture & optional quality amplified stereo sound.

	DIY	MADE
464/6128 (CTM644/0) Picture Only	£6	£10
464/6128 (CTM644/0) Inc Stereo Speakers	£31	£40
464/6128 PLUS (CM14) Inc Sound	£9	£15
464/6128 Green (GT-65) Picture Only	£6	£10

Dept CU, Hagars Electronics,
127 High Street, Sheerness, Kent ME12 IUD

Tel/Fax 01795 663336

Money back approval P&P inc.

CQ/PO DELIVERY 2 DAYS

FREE **Gerry Broad** FREE

AMIGA PUBLIC DOMAIN
EST 1993
ALSO GVB-PD

FREE CATALOGUE DISK.

AS LOW AS 50.P PER DISK - MINIMUM ORDER £5.

FOR A FREE CATOLOGUE DISK, PLUS FREE GIFT 20 HALF SIZE DISK LABELS. YES 20 FREE LABELS

1000s OF DISKS

PLUS 20 FREE LABELS WITH YOUR FIRST ORDER - SUBJECT TO AVAILABILITY

SEND A SAE TO:
G.V. Broad Enterprises, 43 Badger Close,
Maidenhead, Berkshire, SL6-2TE

LEAVE YOUR NAME & ADDRESS ON ANSWER MACHINE.
SPEAK SLOWLY & CLEARLY

01628 636020

e-mail: a2gubroad@aol.com

SHAC

SECOND HAND AMIGA CENTRE

TEL 01983 290003

A1200's FROM £169

MONITORS FROM £99

FREE UK MAINLAND DELIVERY
ALSO, HARD DRIVES, RAM EXPANSIONS,
DISK DRIVES SOFTWARE ETC.
ALL AT REASONABLE PRICES
WE ALSO PURCHASE PERIPHERALS POA.

SEND SAE FOR LATEST LIST TO:
SHAC, 69 KINGS ROAD, EAST COWES,
ISLE OF WIGHT, PO32 6SE
Tel:0410 067525

Mail Order Only

CHROMA

CREATIVE HOME COMPUTING

GENLOCKS/ACCESSORIES
SYSTEMS/TOWER CONVERSIONS

AMIGA & PC SUPPORTED
BEGINNERS' SETUP

BUREAU & SCAN SERVICES
FILE CONVERSION
MULTIMEDIA & DESIGN

01328 862693

E-MAIL CHROMANET@AOL.COM
HTTP://MEMBERS.AOL.COM/CHROMANET

FUTURE PD

35p

- Highest quality DD disks
- Next day despatch.
- 16,000 titles Inc. Aminet.
- For branded disks add 10p.

1-9=50p 10-39=40p 40+=35p
130 x 10 DISK PACKS - £3.40

10 FREE DISKS voucher with 3 disk catalogue (free with any order, or send 3 x 1st class stamps)

CHOOSE UP TO 1000 TITLES ON CD AND/OR BACK UP YOUR HARD DRIVE.

ONLY £19.99

Please write for full details

Dept CUF, 12 Ranworth Road, Bramley,
Rotherham, S66 2SN

FORE-MATT

Home Computing

Dept.CU, PO Box 835,
Wootton Bassett, Wiltshire SN4 8RX

TEL: 01793 853802

Public Domain/Shareware/CD-ROM/Commercial Software/Hardware

FREE CATALOGUE DISK

PD / Shareware from only 50p/disk

A Whole World of Amiga Software

CDROM				DISK			
Big Red Adventure	£16.99	Wendetta	£19.99	Worms Directors Cut	£24.99	Burnout	£17.99
Pinball Illusions	£8.99	Black Viper	£19.99	Theme Park	£14.99	Acid Attack	£14.99
Assassins Games 1	£11.99	Cedric	£9.99	Tin Toy Adventure	£29.99	S.W.O.S. 96/97	£21.99
Assassins Games 2	£15.49	Roadkill CD	£14.99	XP-8	£9.99	Valhalla 1	£12.99
Assassins Games 3	£16.99	17Bit Collection	£19.99	Skidmarks	£7.99	Valhalla 2	£12.99
Gloom	£12.99	AGA Toolkit 97	£8.99	Super Skidmarks	£9.99	Valhalla 3	£17.99
Gulp	£4.99	Arcade -Classics+	£14.99	Xtreme Racing	£9.99	JET Pilot	£15.99
Akira	£4.99	Encounters UFO	£14.99	Capital Punishment	£25.99	Bigrats AGA	£12.99
Trapped	£19.99	Flyin' High	£29.99	MW Experience	£9.99	Tiny Troops	£16.99
The Strangers	£24.99	Epic Encyclopedia	£20.00	Minskies	£9.99	Timekeepers	£12.99
6th Sense Investigators	£29.99	Insight Dinosaurs	£4.99	Info Nexus	£4.99	Hillsea Lido	£14.99
Scene Storm	£5.99	Into The Net	£17.99	FI Grand prix	£24.99	Fears	£7.99
Vital Lite	£4.99	Euro CD Vol 1	£9.99	Gloom	£4.99	Sooty Paint	£9.99
Chaos Engine	£4.99	Multimedia Toolkit	£5.99	F15 Strike Eagle II	£14.99	Postman Pat	£3.99
Video Creator	£4.99	Network CD	£6.99	10/10 Maths	£14.99	10/10 Words	£14.99
Oh yes! more worms	£7.99	Octamed Soundstudio	£8.99	Deluxe Paint 5	£19.99	PCX PC Emulator	£49.99
UFO Gold	£14.99	LSD 3	£17.99	Colonization	[illegible]	Gunship 2000	£14.99

Many more titles in stock

ONLY 50p p&p per order

CLASSIC AMIGA
P.D Software

Phone for a FREE catalogue disk

0161 723 1638

SHOP OPEN

12-9pm DAILY

FULL RANGE OF CD ROMS & CD32's
HARD DRIVES / MEMORY EXPANSIONS
CD ROM DRIVES
GAMES NOW IN STOCK

11, DEANSGATE
RADCLIFFE
Manchester

SELECT SOFTWARE

FREE GIFTS:-

- ☆ 3 FREE disks per £10
- ☆ FREE spare labels
- ☆ FREE 1st class P&P next day despatch
- ☆ FREE Disk Boxes
- ☆ Branded Disks

PHONE FOR FREE CATDISK

- ☆ Amended to work easily for beginners
- ☆ Only best titles & latest versions
- ☆ Guaranteed - No quibble replacements

A1200/A4000
- ☐ Rocketz 2.28 AGA
- ☐ Brain Dead Doom Clone
- ☐ Ampu Worms Clone (2)
- ☐ Ariel Racers Skidmarks (2)
- ☐ Slipstream 3D Game Demo
- ☐ WB3 Beginner Guide
- ☐ HD Click 3
- ☐ SwazBlanker 2.7 AGA
- ☐ RD's Datatypes
- ☐ Iconian 2.98s AGA 90%
- ☐ D.Pacman1.6 AGA 88%
- ☐ D.Galaga 2.6C AGA 100%
- ☐ Diamond Caves Latest (2)
- ☐ Cybertech AGA (2)
- ☐ Klondike AGA Floppy (3)
- ☐ Klondike AGA 4 (4) (hd)
- ☐ Samurai Showdown AGA

WB2+ UTILS
- ☐ IDEFIX 97 latest
- ☐ Image Studio 2.2 (2) (hd) 90%
- ☐ Menus & More 3.2 93%
- ☐ Palette Control Utils
- ☐ Reorg3.11 & Disksalv 2
- ☐ Fiasco2.01 Database (2) 96%
- ☐ Virus Xtruder 3.4 92%
- ☐ Filequest Dopus Clone
- ☐ PowerdataPro HD doubler
- ☐ XPK Libs and Tools
- ☐ Executive 2.1 (2) (hd) 95%
- ☐ MCP Latest (2) 93%
- ☐ Toolsdaemon 2.1a

MUI UTILS (WB2 +)
- ☐ Tool Manager 3 Kit
- ☐ MUI 3.8 and DevKit (2)
- ☐ MUI on floppy-hd not req'd (3)
- ☐ RO Filemanager1.29 84%
- ☐ Daily Backup 2.42
- ☐ Screentab 3.2
- ☐ Start Menu 2
- ☐ Windoze Progs & More
- ☐ RD's MUI Utils 33
- ☐ RD's MUI Utils 34
- ☐ MUI Video Titler 2.1
- ☐ MUI Rexx 2.2 94%

WB2 + GAMES
- ☐ Kick It (90%)
- ☐ MegaTyphoon 91%
- ☐ Statix 89%
- ☐ Psycheual 98%
- ☐ Deluxe Pacman 1.6 88%
- ☐ Rebouldix
- ☐ Slider 92%
- ☐ Torque 87%
- ☐ Deluxe Galaga 2.6 100%

UTILS ETC - ANY 1MB
- ☐ TextEngine 5 Word Pro
- ☐ Snoopdos 3
- ☐ Wordworth Fonts (5)
- ☐ Panasonic Print Driver
- ☐ Star Printer Drivers
- ☐ Pro Printer Drivers

ART, MUSIC ANY 1MB
- ☐ Junior Picasso
- ☐ Disney Colour Clipart (2)
- ☐ Spectrapaint 3.1
- ☐ RD's Sound Samples (3)
- ☐ RD's Instruments (2)
- ☐ Star Trek Rave Demo
- ☐ Octamed v5 (WB2+)

GAMES - ANY 1MB
- ☐ Xmas Kids games (3)
- ☐ Yahtchoo
- ☐ Astro Kid
- ☐ Witness Project X Clone
- ☐ Blasted Shoot em up
- ☐ Dog Fight 1.1
- ☐ Super Foul Egg (Puyo)
- ☐ M&S Tetris Compilation
- ☐ Megaball v4 (3)
- ☐ M&S Puzzlers Comp
- ☐ M&S Blaster Comp
- ☐ Pinball Fantasies Demo
- ☐ Breed 96 SimCity 1.3
- ☐ Total War 1.9
- ☐ Real Chinese Majong
- ☐ Super Skiddy 3 85%
- ☐ Wheel Chair Gladiators
- ☐ Wally World (2)
- ☐ Coarse Fishing (2) 100%
- ☐ Antwars 1.9
- ☐ Cosmic Racer
- ☐ Chaneques (2)
- ☐ M.A.S.H.
- ☐ Kung Fu Charlies
- ☐ Solo Assault

EDUCATIONAL - ANY 1MB
- ☐ Star Trek Guide
- ☐ Star Trek Next Gen Quiz (2)
- ☐ Barney Meets Santa (2)
- ☐ Barney Goes Camping (2)
- ☐ Octamed 5 Tutor (4)

ICONS & BACKGROUNDS
- ☐ Magic WB 2.1 p (2) (WB2+)
- ☐ Magic Workbench 1.3
- ☐ Newicons 3 (2) (WB2+) 90%
- ☐ AES Newicons 4, 5 & 6
- ☐ Newicons Backdrops
- ☐ Magic WB extras 11 (2)
- ☐ Magic WB Backgrounds (2)
- ☐ Rabbits MWB Icons 14
- ☐ Star Trek Magic WB extras
- ☐ Iconographics v3 (3)
- ☐ Iconographics More Icons

ALL DISKS £1 • AMINET from 25p • 10 DISK THEMED PACKS £5 • Cheques payable to M.Wood,
Dept CUS, 12 Ranworth Road, Bramley, Rotherham, S66 2SN ORDERLINE: 01709 530 569

KEW = II
SOFTWARE

Est. 1989

THE BEST IN QUALITY PD & SHAREWARE
SUPPLIED ON BRANDED DISKS ONLY!

The LEADER -
OTHERS CAN ONLY FOLLOW!

FREE FRIENDLY HELP BY
POST or PHONE ANYTIME!
FREE CLUB MEMBERSHIP

PICK YOUR OWN PROGRAMS!
BY NAME, NUMBER AND SIZE!
IT'S EASY!
500K makes 1 bootable disk!
800k makes 1 non bootable disk!

CATALOGUE WITH FULL DESCRIPTIONS & INDEX ONLY £1

Phone for the LATEST PROGRAMS!

1-3 disks £1.50,
4 or more ONLY £1.25

P.O BOX 672
South Croydon
Surrey CR2 9YS
Tel: 0181 657 1617

FREE P&P

ORIGINAL COLLECTION EST 1988

17 BIT

NOW OWNED BY QUARTZ PD
THAT BIT BETTER THAN THE REST

OVER 4300 QUALITY SOFTWARE TITLES!
SOFTWARE FOR EVERYONE - GAMES, UTILS, DEMOS, ETC.
1500 QUARTZ UTILITY TITLES!
UTILITIES LIBRARY FOR THE SERIOUS AMIGA PROFESSIONAL!

AMIGA PROBLEM? WE HAVE THE ANSWER!

POWER GAMES!
AMIGA GAMES ARE NOT DEAD, AND WE CAN PROVE IT! PICK ANY OF OUR KICK ASS QUALITY GAMES FROM OUR CATALOGUE AT JUST £1.00 A TITLE! OR PICK ANY 20 TITLES FOR £18.00

QUICKSTART 1200!
A SUPERB INTRODUCTION TO THE AMIGA A1200! SHOWS YOU WHAT A POWERFUL MACHINE THE A1200 REALLY IS! IDEAL FOR NEW A1200 OWNER! £7.99

AGA TOOLKIT 97 CDROM!
GOT A CD ROM DRIVE FOR YOUR AMIGA? THEN GET A LOAD OF THIS GROOVY STUFF! THIS CD CONTAINS EVERY TOOL FOR EVERY JOB! ITS THE BEST OF OUR QUARTZ UTILS LIBRARY READY TO RUN ON CDROM! 92% REVIEW IN CU AMIGA! £8.99

!FREE INTERACTIVE ON DISK CATALOGUE!
FOR YOUR EXCITING FREE COPY SEND 2 x 1st CLASS STAMPS OR YOU CAN PHONE US ON OUR 24 HOUR ORDER LINE!

DEPT CUX, 44 CECIL ST, WALKDEN, MANCHESTER, M28 3LE

0161 702 6737

THOUSANDS OF TITLES IN STOCK AT JUST £1.00
ONE FREE WITH EVERY 10 ORDERED 70P P+P ON ALL ORDERS

MAKE CHEQUES PAYABLE TO QUARTZ P.D.

CAT DISK £1 OR FREE WITH EVERY ORDER

FREESTYLE PD

TEL: 01922 710985
TWO FREE DISKS WITH EVERY 10 ORDERED

DISK PRICES
1-20 £1 EACH
21+ 75p EACH
P&P 50p PER ORDER

1200 ONLY GAMES
Motorola Invaders (2)
Giger Tetris
Megaball 3
Kiss The Canvas
Cybertech Corp (2)
Mad Fighters
To The Death
Hoi

1200 ONLY GAMES
Beetle
Baza N Runt
Masquerade (2)
Zombie Apocalypse II
Rocketz
Tetris Duel
Jinx (2)
Hyperace V2 (2)

1200 ONLY GAMES
Step 5
Deluxe Pacman AGA
Breakin Bricks (HD)
Kellogs Land
Fears
Bratwurst
Skidmarks 2 Cars (2)
Gloom

1200 ONLY GAMES
Apple Jack
Malediction (2)
Excell Card Games 3
Poweroids
Blob Kombat
Tetrys 96
Blitris
Monsters of Terror

AGA GLAMOUR
PLEASE STATE OVER 18
- ☐ Caroline Kerr
- ☐ Jo Guest 2
- ☐ Stunners (2)
- ☐ Hubba Hubba (2)
- ☐ Claudia Schiffer
- ☐ Erika Eleniak
- ☐ Pam Anderson NFA (2)
- ☐ Elle McPherson (3)
- ☐ Nikki Tylor (2)
- ☐ Playmates (5)
- ☐ Starkers 13 (2)
- ☐ Starkers 14
- ☐ Danni Minogue (3)
- ☐ Kylie Minogue (3)
- ☐ Madonna Sex (3)
- ☐ Lingerie Babes (5)
- ☐ Christ Applegate (3)
- ☐ Bluey (3)
- ☐ Liz Hurley (2)
- ☐ Jo Guest (2)
- ☐ Lana Cox
- ☐ Teresa May

KLONDIKE AGA
- ☐ Babylon 5 Characters
- ☐ Nicki Lewis (18+)
- ☐ Absolutely Stunning (18+)
- ☐ Klondike (3)
- ☐ Klondike V3 (4)(HD)
- ☐ Card Games Deluxe (3)
- ☐ Butts (18+)
- ☐ Playmates 1 (18+)
- ☐ Stocking Tops (18+)
- ☐ X-Files 1
- ☐ X-Files 2
- ☐ Jenifer Connely
- ☐ Wendy Windham
- ☐ Big Baps (18+)
- ☐ Cameron Diaz
- ☐ Eva Herzigova
- ☐ Extasy (18+)
- ☐ Sharon Stone
- ☐ Teri Hatcher
- ☐ Jennifer Aniston
- ☐ Pussy Pack (18+)
- ☐ Babes Galore (18+)
- ☐ European Models (18+)
- ☐ Blonde Girls (18+)
- ☐ Suspenders (18+)
- ☐ 60s Dr Who
- ☐ 70s Dr Who
- ☐ Lana Cox (18+)
- ☐ Teresa May (18+)
- ☐ Models (18+)
- ☐ Star Trek
- ☐ Star Trek TNG
- ☐ Babylon 5
- ☐ Voyager
- ☐ Generations
- ☐ Wallace + Gromit

GAMES CLASSICS
- ☐ Missile Command
- ☐ Space Invasion 2
- ☐ Gorf
- ☐ Defender
- ☐ Zaxxon
- ☐ Donkey Kong
- ☐ Derring Do
- ☐ Pucman
- ☐ Deluxe Galaga 2.6
- ☐ Galaxy Wars
- ☐ Asteroids

TETRIS
- ☐ Amotrix
- ☐ De Tris V2
- ☐ Columns
- ☐ Dr Mario
- ☐ Tetris Pro
- ☐ Megablock II
- ☐ Power Tetris
- ☐ Pill Mania
- ☐ Tetris
- ☐ Deflektris
- ☐ Cybertris
- ☐ Statistix
- ☐ Classic Tris
- ☐ Minskies Furballs
- ☐ Double Tris
- ☐ Six Tris
- ☐ Tritus
- ☐ Hexagons

PAC-MAN
- ☐ Jackman
- ☐ Pac Mac
- ☐ Yum Yum
- ☐ Pacman's Revenge
- ☐ 3D Pacman
- ☐ Cyberman
- ☐ Super Pacman 92
- ☐ Deluxe Pacman
- ☐ Pucman Worlds
- ☐ Pacman 96

BANDITS
- ☐ Amiga Win (AGA)
- ☐ Cash Fruit
- ☐ Loads A Money
- ☐ Ambassador
- ☐ Bandit Mania
- ☐ Fruit Mania
- ☐ Poker Mania
- ☐ Super Mega Fruits
- ☐ Ultimate Fruit Mach
- ☐ Black Knight

DRIVING
- ☐ Skoda Challenge
- ☐ Battle Cars II
- ☐ Flaming Engines
- ☐ Mangled Fenders
- ☐ Last Lap
- ☐ Motor Duel

BREAKOUT
- ☐ Brik Fighter
- ☐ Polatail (AGA)
- ☐ Boris Ball (AGA)
- ☐ Maniac Ball (AGA)
- ☐ Knock Out (AGA)
- ☐ Poing 5
- ☐ Megaball
- ☐ Megaball V2
- ☐ Cybersphere
- ☐ Alienoid
- ☐ Paranoid
- ☐ Power Walls
- ☐ Poing 4
- ☐ Ultra Ball
- ☐ Lightning V1.3
- ☐ Mini Arcanoid

BOARD GAMES
- ☐ A:Monopoly
- ☐ Diplomacy
- ☐ Othello
- ☐ Serious Backgammon
- ☐ Monopoly
- ☐ V Chess
- ☐ Pro Bingo
- ☐ Scrabble
- ☐ Cluedo
- ☐ Draughts

ADVENTURE
- ☐ Starbase 13 (2)
- ☐ Black Dawn
- ☐ Dragon Cave
- ☐ Knightwoode
- ☐ Psycho Ward
- ☐ The Summoning
- ☐ Dead of Night (3)
- ☐ Mad House (2)
- ☐ Inner Demons (4)
- ☐ Legions of Dawn
- ☐ Black Dawn 5 (2)
- ☐ Emotional Conflict
- ☐ Jerrick Bonesnapper

QUIZ
- ☐ Red Dwarf Trivia 3
- ☐ Wots Its Name
- ☐ S'marks Pop Quiz
- ☐ Wheel of Fortune
- ☐ Quiz Challenge
- ☐ Quiz Master

PUZZLE
- ☐ Gush
- ☐ Jigsaw (2)
- ☐ Marbles
- ☐ Word Play
- ☐ Jump Em
- ☐ Springtime
- ☐ Blobble

RPG STRATEGY
- ☐ Risk (AGA)
- ☐ Global Nuke War
- ☐ Survivor
- ☐ Total Wars
- ☐ War
- ☐ Legend of Lothian
- ☐ Fleet 10
- ☐ Col.Conquest (2MB)

CARD GAMES
- ☐ Marry Ampie
- ☐ Bridge
- ☐ Solitaire Sampler
- ☐ Casino Blackjack
- ☐ Hi Lo Card Game
- ☐ Cardz
- ☐ King Hi
- ☐ Smart Cardz

BEAT EM UPS
- ☐ Fighting Warriors
- ☐ Martial Spirit
- ☐ Supreme Fighter
- ☐ Cyber Games (2)
- ☐ Mortal Kumquat

PLATFORMERS
- ☐ Jet Set Willy 97
- ☐ Pitbell in Wonderland
- ☐ Star Joy
- ☐ Willys Castle Dreams
- ☐ Wally world (2)
- ☐ Jet Set Billy
- ☐ Dangermouse
- ☐ Jet Set Willy 3
- ☐ Platman
- ☐ Top Hat Willy
- ☐ Trap Em
- ☐ Danger Dog
- ☐ Deluxe Jumpman Jnr.

TILES
- ☐ Dragons Pyramids
- ☐ Hit Tiles 2
- ☐ Bubble Pop
- ☐ Bubble Pop (AGA)
- ☐ Shanghai 93
- ☐ Tiles/Zynt
- ☐ Imperial
- ☐ China Tiles
- ☐ Piles O Tiles
- ☐ Twinz Pro

MISC
- ☐ 18th Hole Golf
- ☐ Amos Games Coll
- ☐ 21 Games
- ☐ 25 Games
- ☐ Super Lge Manager
- ☐ Scottish F.Ball Mngr.
- ☐ Top Of The League

- ☐ Sonic Hedgehog
- ☐ Beavis & Butthead
- ☐ Friday Night Pool
- ☐ Course Angler (2)
- ☐ Roulette
- ☐ Mr Men Olympics
- ☐ Int. Cricket

BUSINESS
- ☐ Ultra Acc'nts 4 (2MB+HD)
- ☐ Amiga Fox DTP
- ☐ Home Accounts
- ☐ Text Plus 3
- ☐ Forms Really UnLTD.
- ☐ Money Program
- ☐ Pay Advice Analyzer
- ☐ Easy Calc +
- ☐ Address Book
- ☐ 600 Business Letters
- ☐ Little Office
- ☐ ABank V1.01
- ☐ Loans and Accounts
- ☐ Account Master 3
- ☐ On Form V1.3
- ☐ Dialling Codes
- ☐ Text Engine 5
- ☐ Notebook

COPIERS
- ☐ Safe 2
- ☐ Super Duper (WB3)
- ☐ Copy C2
- ☐ Nib V2
- ☐ D Copy 3.1
- ☐ Lock Pic 2
- ☐ The Clone

DISK UTILS
- ☐ Doc File Protector
- ☐ Menu Launcher
- ☐ Fast Intro Maker
- ☐ Catalogue 3
- ☐ Menu Master 3
- ☐ Disksalve V2
- ☐ Assigns Manager
- ☐ Tool Manager (2)
- ☐ Power Cache V37.115
- ☐ Disk Manager V4
- ☐ Snoopdos V3
- ☐ Abb V6.1
- ☐ Disk Mon Tools V3.1

HD UTILS
- ☐ Team 17 HD Install
- ☐ Core Design HD Install
- ☐ Renegade D Install
- ☐ Install Kit 2.2
- ☐ Da Cool Installer
- ☐ Reorg V3.11
- ☐ Program Loader
- ☐ Lock Out V2.1c

- ☐ HD Games Installers (3)
- ☐ Tools Daemon V2.1
- ☐ Lock Up V4.0

SLIDESHOW CREATORS
- ☐ Slideshow Generator
- ☐ Slideshow Maker
- ☐ Slideshow Con Kit

GRAPHIC UTILS
- ☐ Visage (WB3)
- ☐ ASI Multi Vision
- ☐ GFX Conv V1.2
- ☐ Viewtek V2.01
- ☐ Superview V4.42
- ☐ Transition V1

LOTTERY
- ☐ Cop The Lot Pro
- ☐ MP Super Lottery
- ☐ Best Lottery Program
- ☐ Syndicate Pro
- ☐ Pro Lottery 96 V2

PRINTER UTILS
- ☐ Canon BJC Disk
- ☐ Star Printer Drivers 1
- ☐ Panasonic Studio
- ☐ Epson Stylus Utility
- ☐ Printer Drivers
- ☐ Print Studio
- ☐ Award Con Kit
- ☐ Address Print V4
- ☐ Canon Studio
- ☐ Disk Stik V1.1

TUTORIALS
- ☐ Amigados Tutorial
- ☐ WB2 Tutorial
- ☐ Beginners Guide to WB3
- ☐ Dosman

HOBBIES
- ☐ Word Power
- ☐ Starview Astrology
- ☐ Birthdate History V2.21
- ☐ Personality Analysis
- ☐ Gen Tree V1.5 (2)

NEW GAMES

PLEASE NOTE
- ☐ All titles will work on A1200.
- ☐ All titles except AGA, 1200, WB3 will work on A500+ and A600.
- ☐ A500 owners, please send for our A500 Cat Disk.

FOR A RAPID RETURN PLEASE MAKE CHEQUES/POSTAL ORDERS PAYABLE TO: FREESTYLE PD, DEPT CU, 108 WOODSIDE WAY, SHORTH HEATH, WILLENHALL, WEST MIDLANDS WV12 5NH

FREE GAMES CHEATS ON ALL ORDERS
FREE 1.4 EMULATOR

P UNDERGROUND D

FREE LIBRARY DISK ON ALL ORDERS
FREE POST & PACK

PLATFORM GAMES
- ☐ 001 MAD COW NOT 1.3
- ☐ 1330 CAPTAIN BONUS
- ☐ 1445 10 C.W. GAMES
- ☐ 1553 LANCE-O-LOT
- ☐ 1462 CHARLIE COOL
- ☐ 1889 A12 DANGER DOG
- ☐ 1878 JUMPMAN DELUXE
- ☐ 2008 A12 KICK IT!

SPACE BLASTERS
- ☐ 2042 A1200 GONNY-S
- ☐ 2043 STAR-BOY
- ☐ 2098 F-SPLATT 2
- ☐ 911 SOLO ASSAULT
- ☐ 906 OBLITERATOR
- ☐ 498 THE LAST REFUGE
- ☐ 1434 SPACE BLASTER
- ☐ 1706 THE ASTRO KID
- ☐ 1855 A12 SPEEDBREAK
- ☐ 1904 CREEPY CRAWLIE
- ☐ 1921 WITNESS
- ☐ 1885 BLASTED
- ☐ 2003 A12 BANANA ISLE

ARCADE GAMES
- ☐ 2093 A1200 GEENIE
- ☐ 2085 FISHING FUN
- ☐ 273 KELLOGS EXPRESS
- ☐ 1368 ALIENS F.F.
- ☐ 1338 STRIKE COMMAND
- ☐ 1500 U.P.D 24 GAMES
- ☐ 1807 A12 BEASTIES 2
- ☐ 1880 A12 SLIPSTREAM
- ☐ 1908 FLY TIGERS
- ☐ 1948 ANTS-ANTS-ANTS

P.D. VERSIONS
- ☐ 025 HUNTER PLUS
- ☐ 815 LEMMINGS PACK
- ☐ 023 RICK DANGEROUS
- ☐ 1457 TI-FIGHTERS
- ☐ 022 THE GODS
- ☐ 026 ROBOCOP V2
- ☐ 1702 S.W.O.S MOON
- ☐ 1778 PINBALL FANTASY

COMBAT GAMES
- ☐ 941 FATAL BLOWS
- ☐ 938 MARTIAL SPIRIT
- ☐ 290 FIGHT WARRIORS
- ☐ 1238 WEAPON MASTERS
- ☐ 1428 CYBERGAMES 3DSK
- ☐ 1548 FIGHT A1200
- ☐ 1720 A1200 SAMURAI

CLASSIC GAMES
- ☐ 011 ASTEROIDS
- ☐ 693 MISSILE COMMAND
- ☐ 778 OVERLANDER
- ☐ 692 SPACE INVADERS
- ☐ 841 COOKIE
- ☐ 308 DONKEY KONG

DRIVING GAMES
- ☐ 951 FLAMMING ENGINES
- ☐ 469 THE ROAD TO HELL
- ☐ 1417 MANG FENDERS V2
- ☐ 1466 A12 KNOCK OUT
- ☐ 1642 A1200 EX RACING
- ☐ 1705 A12 AER RACERS
- ☐ 074 F1 EDITOR 96/7

SIMULATORS
- ☐ 926 HELICOPTER
- ☐ 332 SEALANCE-SUB
- ☐ 333 BATTLE CARS V2
- ☐ 1273 A12 TRAIN DRIVER

SPORT GAMES
- ☐ 1014 CRAZY GOLF
- ☐ 630 TEN PIN BOWLING
- ☐ 1171 2 DSK CRS-ANGLER
- ☐ 1373 ICE HOCKEY
- ☐ 1317 A12 GON FISHING
- ☐ 1465 A12 2DSK TENNIS
- ☐ 1251 TENNIS TOUR
- ☐ 1630 INTER CRICKET
- ☐ 1700 GOLF 9 HOLES

HINTS & CHEATS
- ☐ 418 1000 CHEATS
- ☐ 931 BACKDOOR V3
- ☐ 821 PASSWORD MANIA
- ☐ 813 GAME TAMER V4.5
- ☐ 820 MEGA CHEATS
- ☐ 681 SIERRA SOLUTIONS
- ☐ 1358 GAME SOLUTIONS
- ☐ 1653 SOLUTIONS V3
- ☐ 1651 SOLVES 6 DISK

OVER 18 GAMES
- ☐ 997 2 DSK ADVENT V1
- ☐ 1001 2 DSK ADVENT V2
- ☐ 101 TERROR LINER V1
- ☐ 1081 ADULT TETRIS
- ☐ 1248 STRIP POKER
- ☐ 1145 A12 NUMBERS V1
- ☐ 1335 ADULT DROIDS
- ☐ 1533 DRAGONS BALL
- ☐ 1517 ADULT BOMBER
- ☐ 1654 LEGO BREAKOUT
- ☐ 1768 4 DSK A12 ADVENT
- ☐ 1906 BLIND DATE

TETRIS - COLUMNS
- ☐ 294 KLACK-TRIS COLMS
- ☐ 107 TWIN-TRIS TETRIS
- ☐ 293 DR. MARIO COLMS
- ☐ 1602 SUPER FOUL EGG
- ☐ 1627 PILL - MANIA
- ☐ 1954 A1200 PLUBZ
- ☐ 2000 A12 WORMTRIS

PAC-MAN GAMES
- ☐ 1931 A12 PLAY PAC
- ☐ 1956 JACK-MAN
- ☐ 1096 PUC MAN
- ☐ 1138 A12 CYBER MAN
- ☐ 1648 A12 BOBS LEMON
- ☐ 230 SUPER PAC-MAN

BREAK-OUT & PONG
- ☐ 003 MEGABALL V1
- ☐ 459 MEGABALL V2
- ☐ 1459 CYBERSPHERE
- ☐ 559 MEGABALL V3
- ☐ 1704 BORIS BALL
- ☐ 1924 OUTSIDE BREAK
- ☐ 2021 BRIK-FIGHTER

BOULDERDASH GAMES
- ☐ 1527 ICE MINE PRO
- ☐ 1595 NEW MINES
- ☐ 1569 BUG MINES
- ☐ 1572 UNDER MINES
- ☐ 1573 GOLD MINES
- ☐ 1577 EMERALD HEAD
- ☐ 1580 EXPERT MINES
- ☐ 1582 DENMARK MINES
- ☐ 1583 STYX MINES
- ☐ 1892 SPACE MINES
- ☐ 2013 WONDER MINES

PUB-CLUB GAMES
- ☐ 2069 BILLYS DARTS
- ☐ 2032 PRO POKER
- ☐ 1930 A12 DOMINOES
- ☐ 1929 A1200 YATZEE
- ☐ 1304 CHECKERS V2
- ☐ 222 FRUIT MACHINE
- ☐ 375 CARDS SOLITAIRE
- ☐ 1246 AMIGA CRIBBAGE
- ☐ 1362 PUB DARTS TOUR
- ☐ 560 WORLD DARTS
- ☐ 1450 SAT SNOOKER
- ☐ 1112 A1200 X CARDS

BOARD GAMES
- ☐ 2033 SCRAZZLE
- ☐ 910 NEW MONOPOLY STAT
- ☐ 631 SCRABBLE
- ☐ 476 CHESS GAMES
- ☐ 1433 LIFT & LADDER

ADVENTURE GAMES
- ☐ 116 STAR TREK 2 DISK
- ☐ 297 NEIGHBOURS 2 DISK
- ☐ 1671 BREED 1996
- ☐ 1753 A1200 GLOOM
- ☐ 1894 TIME RUNNER
- ☐ 1925 DUNGEONS

STRATEGY GAMES
- ☐ 876 GLOBAL NUKE WAR
- ☐ 826 IND-ESPIONAGE
- ☐ 1182 A12 NIGHTMARE
- ☐ 1170 A12 LORDS 2 DSK
- ☐ 1431 UFO UNCLOTHED
- ☐ 1547 SOLO STAR TREK

PUZZLER GAMES
- ☐ 953 CHANEQUE 2 DISK
- ☐ 859 10 PUZZLERS
- ☐ 1550 PUZZLER PITS
- ☐ 1546 EXPERT BALLS
- ☐ 1633 THE WOOGLIES
- ☐ 1765 BRAIN BALLS
- ☐ 1764 BRIDGE BALLS

MANAGER GAMES
- ☐ 876 SCOTTISH LEAGUE
- ☐ 321 AIRPORT
- ☐ 443 SLAM BALL
- ☐ 817 BLOOD BALL
- ☐ 1429 ULTI MANAGER
- ☐ 1699 PREMIER PICS
- ☐ 1763 AIR TRAFFIC
- ☐ 1771 MICRO MART 3

QUIZ GAMES
- ☐ 1031 TREK TRIV 5 DISK
- ☐ 716 POP MUSIC QUIZ
- ☐ 462 WHEEL OF FORTUNE
- ☐ 1597 QUIZ 555
- ☐ 1683 HOLLYWOOD TRIV
- ☐ 1670 A12 DEATH ROW

LOGIC GAMES
- ☐ 1960 BLOCK BLANKS
- ☐ 1037 MARBLES GAME
- ☐ 119 DRAGON'S TITLES
- ☐ 112 DRAGON'S CAVE
- ☐ 1477 BOMB MANIACS
- ☐ 1476 MARBEL-LOUS
- ☐ 1687 TILE MANIA
- ☐ 1922 LOGICS

AMIGA LEISURE
- ☐ 205 AMIGA PUNTER
- ☐ 1210 LOTTO LUNATIC
- ☐ 1438 A-GENE V5
- ☐ 1594 LOTTERY SYSTEM
- ☐ 1682 THE PHYSICIAN

A1200 MEGADEMOS
- ☐ 2045 ETERNAL 2 DISK
- ☐ 2083 O SPICE 2 DISK
- ☐ 2053 TERMINATOR DISK
- ☐ 1270 DOOM RAVE
- ☐ 1220 AMIGA JAMMIN
- ☐ 1165 VENTILATOR
- ☐ 1685 2 DISK JADE
- ☐ 1725 DREAM WITH ME

AMIGA MEGADEMOS
- ☐ 2053 SHED TEARS 2DSK
- ☐ 460 TEKNO RAVE
- ☐ 1015 2DSK TAZ QUEEN
- ☐ 1104 2DSK OXYGENE
- ☐ 1785 TECHNO TRACKS
- ☐ 1816 BATMAN 2 DISK
- ☐ 1985 COLOUR CYCLE

A1200 SLIDE SHOWS
- ☐ 740 4 DISK MANGA
- ☐ 1271 PIXEL STORMS
- ☐ 1193 LEMMINGTONS
- ☐ 1646 MISS MANGA
- ☐ 1650 STARFLEET 3DSK

AMIGA SLIDE SHOWS
- ☐ 2064 A12 PATHFINDER
- ☐ 2048 FAN-GUIDE 2DSK
- ☐ 704 REVELATIONS
- ☐ 061 PAT NAGEL'S GIRLS
- ☐ 936 AVIATION HISTORY
- ☐ 1060 5DSK LION KING
- ☐ 1498 NIGEL MANSELLS
- ☐ 1472 YABA DABA DO

ARTWORK PACKAGE
- ☐ 1932 DOODLE PAINT
- ☐ 063 ULTRAPAINT
- ☐ 349 SPECTRACOLOUR
- ☐ 748 ILLUSION PAINT
- ☐ 1460 A-Z PAINT PAD
- ☐ 1565 CARTOON STUDIO
- ☐ 1707 PERFECT PAINT
- ☐ 1760 JNR PICASSO

ARTWORK PROGRAMS
- ☐ 2056 ASCI ART PRO
- ☐ 1299 A12 MAGNI-CAD
- ☐ 071 GRAPHICS CON KIT
- ☐ 070 GRAPHIC UTILS
- ☐ 133 FRAC LAND BUILD
- ☐ 1026 PICTURE LAB

ANIMATIONS
- ☐ 084 PUGGS IN SPACE
- ☐ 651 FAIRLIGHT 242
- ☐ 831 RED DWARF
- ☐ 463 MR POTATO HEAD
- ☐ 347 NEWTEK V3 2 DISK
- ☐ 187 ANIMATION STUDIO

AMIGA VIDEO
- ☐ 329 VIDEO INSCRIPT
- ☐ 790 VIDEOTRACKER 5 DISK
- ☐ 148 S-MOOVIE

MUSIC MAKERS
- ☐ 1971 SAMPLE MAKER
- ☐ 220 FUNK KEYBOARDS
- ☐ 431 RAVE KEYBOARDS
- ☐ 202 MED V3.2
- ☐ 729 DRUM MACHINE
- ☐ 787 SONIC DRUM KIT
- ☐ 738 OCTAMED V2
- ☐ 136 THE ART OF MED
- ☐ 192 THE COMPOSER
- ☐ 618 MUSIC DATABASE
- ☐ 981 AUDIO ENGINEER
- ☐ 1681 PROTRACKER 3.5
- ☐ 1791 OCTATUTOR V5

CLASSIC-POP
- ☐ 201 PIANO CLASSICS
- ☐ 234 VIVALDI 2 DISK
- ☐ 342 AMIGA-DEUS
- ☐ 213 DIGI CONCERT V2
- ☐ 620 BAGPIPE MUSIC
- ☐ 248 EXPRESSION V2
- ☐ 1357 2 MEG DACO VI
- ☐ 1759 GUITAR BLUES
- ☐ 1757 HEAVY METAL
- ☐ 1800 TEKNO MAGE 96
- ☐ 1968 BEATLE MANIA

SAMPLES - MODS
- ☐ 2095 TAZ JUNGLE SFX
- ☐ 2095 TAZ SASH SFX
- ☐ 660 KORG 01W 8 DISK
- ☐ 647 SOUND FX 3 DISK
- ☐ 619 DRUMS 2 DISK
- ☐ 1666 URBAN 6 DISK
- ☐ 1588 DANCE 5 DISK
- ☐ 1258 MOVIE SAMPLES
- ☐ 1861 MONTY PYTHONS
- ☐ 1850 ANSWER BACK
- ☐ 1828 NEW WORMS SFX

AMIGA EMULATION
- ☐ 423 2 DISK SPECTRUM
- ☐ 889 PC EM 2 DISK
- ☐ 327 ACTION REPLAY
- ☐ 955 DOWN TO A500
- ☐ 313 UP TO A500 PLUS
- ☐ 414 UP TO A1200

DISK COPIERS
- ☐ 2022 COPY & CRACK V4
- ☐ 727 MULTI TASK (MT)
- ☐ 158 X.COPY PRO
- ☐ 325 LOCK PICKER V2

HARD DRIVES
- ☐ 2089 GAME INSTALL 12
- ☐ 779 W/B 3 INSTALL
- ☐ 780 W/B 2 INSTALL
- ☐ 490 8 DISK MAGIC W/B
- ☐ 1692 A BACKUP V5
- ☐ 1674 CD ATAPI
- ☐ 1775 2 DISK MUI 3.6
- ☐ 1770 2 DSK ERROR TALK

PRINTING
- ☐ 243 AWARD MAKER 4 DISK
- ☐ 065 AMIGA FONT 7 DISK
- ☐ 100 PRINTER DRIVERS
- ☐ 048 PRINTING STUDIO
- ☐ 345 BANNER MAKER
- ☐ 057 TEXT ENGINE V4
- ☐ 394 INVOICE PRINT
- ☐ 749 FORM PRINTER
- ☐ 1658 CARD AND LABEL
- ☐ 1842 PRINTMASTER
- ☐ 2012 FONT EDITOR

AMIGA BUSINESS
- ☐ 2030 H-MANAGER 2DSK
- ☐ 832 DATABASES 2 DISK
- ☐ 092 ACCOUNT MASTER
- ☐ 470 LITTLE OFFICE
- ☐ 244 SPREADSHEET
- ☐ 535 UK S.T.D CODES
- ☐ 1464 DIARY 2000
- ☐ 1368 AMIBASE V4
- ☐ 1758 DAILY LIVING
- ☐ 1976 NOTEBOOK

COLOUR CLIPART
- ☐ 637 6 DISK COL/BRUSH
- ☐ 633 7 DISK CLIP ART
- ☐ 901 9 DISK WORLD MAP

MONO CLIP ART
- ☐ 172 15 DISK PORTFOLIO
- ☐ 558 7 DISK CLIP ART

AMIGA MODEM
- ☐ 2067 A-EMAIL V1.4
- ☐ 702 COMMS TUTORIAL
- ☐ 413 N.COMMS V3
- ☐ 1032 MAX BBS PROG

PROGRAMMERS
- ☐ 288 A-BASIC TUTOR
- ☐ 306 UNDERSTAND AMOS
- ☐ 1067 AGA DATATYPES
- ☐ 1691 NORTH C
- ☐ 1754 AMIGA DOS FRAU

DO IT YOURSELF
- ☐ 2026 PD MANUALS 2DSK
- ☐ 239 SLIDESHOW MAKER
- ☐ 808 MAKE A DISK
- ☐ 242 MENU MAKER
- ☐ 1154 HEDLEYGUIDE A12
- ☐ 1903 MAKE A DISK V2

VIRUS CONTROL
- ☐ 2097 VIRUS Z V1.39
- ☐ 506 A1200 VIRUS
- ☐ 160 M.V.K PLUS

AMIGA UTILITIES
- ☐ 1030 A12 DIONIC TOOLS
- ☐ 612 4 DISK TOOL KIT
- ☐ 1629 UN-ARCHIVER
- ☐ 1983 CRUNCHERS

DISK & SYSTEM
- ☐ 166 SYSTEM TESTER
- ☐ 467 FILE UNDELETE
- ☐ 194 DISK OPTIMISE
- ☐ 356 ENGINEERS KIT
- ☐ 245 FIX DISK
- ☐ 168 HARDWARE MANUAL
- ☐ 1881 HARDWARE MODS

AMIGA EDUCATION
- ☐ 766 GEOGRAPHY
- ☐ 532 MATHS 5 DISKS
- ☐ 644 ENGLISH 4 DISK
- ☐ 486 LANGUAGES 4 DISK
- ☐ 270 PLANETS 6 DISK
- ☐ 304 ENGINES 5 DISK
- ☐ 059 AMIGA TUTORIAL
- ☐ 1269 DPAINT 4 TUTOR
- ☐ 937 A1200 / 600 TUTOR
- ☐ 1361 2 DISK INTERNET
- ☐ 1360 AMIGA GUIDE
- ☐ 1918 KLINGON TUTOR
- ☐ 1982 DYNAMIC SKYS

DISK COST £1.50 EACH, NO MINIMUM ORDER, ALL VIRUS FREE AND USER FRIENDLY.
All games are on 1 disk and run on all Amiga's unless otherwise stated
PICK AN EXTRA DISK FOR FREE WITH EVERY EIGHT DISKS YOU PURCHASE

UNDERGROUND PD, 54 CARMANIA CLOSE, SHOEBURYNESS, ESSEX SS3 9YZ. TEL: 01702 295887

Name: .... Amiga Model: ....
Address: ....
.... Postcode: ....

Get your work published!

AMIGA
MAGAZINE
Super
CD-ROM 16


Watch Out !
WHACK!
AMIGAPower
Graffito Thanks to TFX for the use of his flatbed ! and remember ~AMIGA RULEZ~
and "The only good Peecee is a broken one"

Do you have software, artwork, utilities, mods, games or any other Amiga creations that you think are worthy of inclusion on a Super CD? If so, get them to us now and give your work a worldwide audience. The best music module each month even gets recorded onto the CD as an audio track!

How to send your work in

All entries, including artwork must come to us on one or more disks. Otherwise they can be uploaded to our FTP site as detailed here.

Make sure you label your disks clearly with your name and address, the name of what you are sending in and the category it is being sent into (like the one opposite).

Important: we cannot accept auto-booting, disk-based software for use on the CD. We require files which can be used or run from the CD-ROM. Please include all the relevant details regarding system requirements and any usage instructions within an ASCII text document with your submissions.

Please complete the following form and enclose it with your disks:

System requirements for the enclosed files:..

....

....

My name: ....

My address and postcode: ....

....

My phone number: ....

I hereby acknowledge that the material enclosed is of my own creation and/or I own the copyright to the material and grant CU Amiga Magazine the rights to publish this material on a forthcoming cover CD-ROM.

....



Send your contributions including the form (left) to:

CD Contributions, CU Amiga Magazine,
37-39 Millharbour, Isle of Dogs, London. E14 9TZ.

If you want to send it to us via our FTP site or E-mail then this is also welcome. We would suggest that you include all of the information on the postal form left in an accompanying doc to make sure your entry is processed properly.

Our E-mail and FTP addresses are:

Internet FTP: ftp.cu-amiga.co.uk/submissions/ (to upload login: cucd password: reader)
or E-mail (MIME only): cd-contrib@cu-amiga.co.uk

Conditions

1. What you send to us must be your own creation or you must own the copyright for it. Please indicate this in the relevant space on the form.
2. It will be assumed that any entry we receive, in the form we receive it, will be freely redistributable unless otherwise stated.
3. The publishing rights for all items sent to us marked for inclusion, whether public domain, shareware or commercially copyrighted will be assumed assigned to us for the purposes of placement on a CU Amiga Magazine CD-ROM. Full title and original copyright for all items remains with the creator.
4. CU Amiga Magazine makes no offer of payment whatsoever for material marked for inclusion which is published on a CU Amiga Magazine CD-ROM.
5. We regret that CU Amiga will not be able to return your work.

Amiga Mice

Replacement Mice	£4.95
MegaMouse 400	£9.95
MegaMouse Plus (3 Button)	£10.95
Optical Mouse	£29.95
New Golden Image TrackBall	£19.95
Pen Mouse (ideal for CAD)	£12.95
New Black Mouse for Amigas	£9.95

Performance
GOLD
97%

Ram Boards

RAM CARDS A1200

A1200 with clock and 4Mb (not upgradeable)	£49.00
A1200 with clock and 8Mb	£65.00
A1200 with clock, 8Mb & 33MHz FPU	£80.00
33MHz FPU inc. crystal	£15.00

Controllers

Catweasel for A1200 – allows you to connect High Density Disk Drives	£55
Catweasel for A1500/2000/4000	£55
Buddha IDE Controller for A1500/2000/4000	£55
Catweasel plus Buddha for A1500/2000/4000	£79
Oktagon 2008 SCSI Controller	£99
Multiface III	£79



New GI-Quatro Buffered Interface for A1200

(Successfully launched at World of Amiga Show '97)

Buffered interface for A1200 with IDEFIX'97 software allows you to connect 4 ATAPI devices to A1200 ....**£59.95**

New AlfaQuatro Interface

Specially made hardware and software. Allows 4 ATAPI devices, ie, 2 IDE hard disk & 2 IDE CD Rom to Amiga 4000 internal IDE controller, through Alfapower on Amiga 500/500+, comes with full IDEFIX software **£59.00**

Joysticks & Joypads

Amiga Joysticks	£9.95
Amiga Joypads	£9.95
CD 32 Joypad	£14.00

Winner of Gold Format Award in Amiga Format February 1997

Best pricing on CD ROM Drives & Hard Drives.

We can supply CD ROM solutions for ALL Amigas from A500 to A4000. We will match any genuine advertised price and also give four top titles free: Nick Faldo's Championship Golf; Syndicate; Pinball Fantasies & The Chaos Engine on top where we have to price match any product.

AMIGA
GOLD
FORMAT

All our External IDE CD ROM Drives have built in power supplies (they do not draw power from your Amiga)
Different options to connect CD ROM drives to A600 or A1200

a) Use Internal IDE port with AlfaDuo if you have 2.5" Hard Drive (will be with full IDEFIX software).
b) Use Internal IDE port with Alfa-Quatro interface if you have 3.5" Hard Drive (will be with full IDEFIX software).
c) PCMCIA external interface option available.

All CD ROM drives have play CD facility.

	External A600/A1200	Internal A1500/A2000	External* A500/A500+	Internal A4000
Quad speed CD ROM for	£149.00	£119.00	£129.00	£109.00
Eight speed CD ROM for	£169.00	£139.00	£149.00	£129.00
12 Speed CD ROM for	£179.00	£149.00	N/A	£139.00
16 Speed CD ROM for	£189.00	£159.00	N/A	£149.00

*(for A500/A500+ Alfapower hard drive controller and Hard Drive is required). A1500/A2000 supplied with IDE controller & software. A4000 supplied with AlfaQuatro interface & Full IDEFIX software.

Floppy Drives

External Floppy Drive for all Amigas	£39.95
Internal Floppy Drive A500/500+	£28.00
Internal Floppy Drive A600/1200+	£28.00
Internal Floppy Drive A1500/2000	£28.00

IDE Hard Drives

HARD DRIVES + BUDDHA CONTROLLER

FOR A1500/A2000/A4000 ....1.2Gig £189.00

IDE 2.5" Hard Drives

IDE 2.5" Hard drives come formatted and installed with Workbench. Cable, screws, software and instructions supplied. *(please ring for availability)*

80Mb	£69.00	340Mb	£109.00
120Mb	£79.00	420Mb	£119.00
250Mb	£89.00	540Mb	£129.00

IDE 3.5" Hard Drives

IDE 3.5" Hard drives come formatted and installed with Workbench. Cable, screws, software and instructions supplied. *(please ring for availability)*

850Mb	£125.00	2.5Gig	£175.00
1.2Gig	£135.00	3.0Gig	£200.00
1.7Gig	£155.00	5.0Gig Maxtor	£329.95

"Amiga Format Gold Award August '97"

Memory

4Mb Simms	£15.00	16Mb Simms	£60.00
8Mb Simms	£25.00	32Mb Simms	£140.00

Zip Rams *(suitable for A3000 & Oktagons)* every 2Mb £40.00

Miscellaneous Products

44pin 3 connector cable	£5.00
44pin 2 connector cable	£3.00
40pin 3 connector cable 90cm	£5.00
AlfaDuo 44pin to 40pin Interface & IDE cables	£20.00
AlfaQuatro 3x40pin Interface & IDE cables	£39.95
DD floppy disks (50) *including multicoloured disk labels*	£13.00
DD floppy disks (100) *including multicoloured disk labels*	£25.00
3.5" Hard Drive Kit for A600/1200 *+ Install software*	£15.00
Diskbox to hold 10 discs	£1.00
Animal Jungle design and Dinosaur design	£2.00
Optical Mouse Mat	£5.00
2 in 1 Scanner/Mouse Pad *Can be used as a memo pad*	£3.00
Amiga Power Supply 4.5 amp	£15.00
Plain Wristrest	£2.00

Accelerator Boards

1230 33MHz + 4Mb	£135.00
1230 33MHz + 8Mb	£145.00
1230 33MHz + 16Mb	£175.00

Accelerator for A1200

Viper MKV 1230 50MHz plus SCSI interface

with 4Mb	£159.00
with 8Mb	£169.00
with 16Mb	£199.00
50MHz FPU	£35.00
Viper MKIV 42MHz + 4Mb (not upgradeable)	£80.00

Accelerator for A600

Viper A630 40MHz + 4Mb (not upgradeable)	£110.00
Viper A630 40MHz + 8Mb (not upgradeable)	£120.00

All prices include VAT. Please add £3.50 P&P for items under £30.00, £5.00 for items over £30.00, £8.00 P&P for Scanners, Speakers & Hard Drives, £10.00 courier for next day. Tax Free Export Orders Welcome.

Golden Image accepts Access, Visa, Cheques & Postal Orders. E&OE. Prices subject to change without notice. Goods subject to availability. Specifications subject to change without notice.

GoldenImage (UK) Ltd

Unit 65, Hallmark Trading Estate, Fourth Way, Wembley, Middx HA9 0LB
Sales Hotline No: 0181 900 9291 Fax: 0181 900 9281
http://www.reserve.co.uk/gold Talking Pages: 0800 600900
Our standard terms and conditions apply – available on request. We do not supply on a trial basis.

VISA MasterCard SWITCH AMERICAN EXPRESS

Q&A

No matter what the level of your technical problems, if you put them to our experts they'll try their best to fathom things out. Also, please remember to provide us with as many details on your systems and problems as possible, to help us in helping you.

Logos

Mysteries and meanings ...

WORKBENCH	Solutions to those everyday troubles with your Workbench.
EXPANSION	If you need help getting more from your Amiga, just ask!
COMMS	All your Internet and general comms problems swiftly solved.
SOUND	Trouble making your Amiga sing? We've got the answers here.
HARDWARE	Technical matters beyond the scope of plug-ins and plug-ons.
SOFTWARE	Answers to queries on particular pieces of software.
HELP	General queries which just don't seem to fit in anywhere else.
CD-ROM	Specific help with CD-ROM solutions and driver problems.
GRAPHICS	Problems with art and design? Help and advice is at hand.
PERIPHERALS	Printers, monitors, we'll solve your peripheral blues for you.

Zorro without Towers

Now that I have seen the Zorro circuit board it seems possible to me that you could have it external (for those without Tower systems – like me) in a separate box. I'm not bothered about a tower, I just want a gfx card.

Jay, E-mail.

It's certainly a good idea in principle, but alas probably impossible. The biggest difficulty is that the bus boards connect to the accelerator slot with a pass through leaving insufficient space in a desktop console style case for the accelerator to be fitted as well. There are also likely to be problems with reliability running all that data down long ribbon cables. The only suggestion we can give is that you contact Eyetech on 01642 713185. They have a single slot Zorro board which may fit in your case if you remove the keyboard and fit a keyboard adaptor.

680x0 for sale?

I own a Blizzard 1260 accelerator with 1230 SCSI, and I am contemplating purchasing a 603+ Power Up card. If I use the 68060 processor from my 1260 card I am left with a lot of redundant hardware.If I could purchase a 68060 cheaply enough,I could sell my 1260 +1230SCSI and defray the cost of the Power Up card.

(a) Where can I buy a suitable 68060 processor?

(b) How much will it cost?

Tony Poole, CyberLeicester

This is a common question. The easiest solution is to buy your PowerUp card with a 68K processor supplied (White Knight: 01920 822321, for example), offer the 200MHz Blizzard 603e+ board costs £399 without anything, up to £649 with an '060/50

The 68K series chips can be bought from Motorola stockists. Future components +44 (0)1753 763000 and EBB +44 (0)1628 783688 seemed like the best bets to us. You may find that buying singly isn't such good value – we were quoted from £100.75p for an '040/25, while White Knight only put a £50 premium on for this. However the stockists mentioned will supply you chips if you want them, Motorola inform us that they have the full range in stock. Ask for part numbers MC68040RC?? where ?? is the clock speed – for instance MC68040RC50 for a 50 MHz job. For an '060 ask for XC68060RC50.

Amiga USA

I wonder if you could help me with a query I have. I currently have an Amiga 500+ with an A590 20Mb hard drive + 2Mb Chip RAM (therefore I have 2 power supply blocks). I have a Ferguson MC01 TV/monitor, and use it via the RGB output on the A500+ with the correct cable.

My brother, in America, has an A1200 with internal HD, 6Mb of RAM, an external HD, external CD-ROM drive and a modem. He runs it in PAL mode by default. He's bought a Pentium 200 with MMX for compatibility with work, and no longer uses his A1200 – which he's giving me when he visits later on this year. My questions are:

1) Can I use the A1200 here if I use my A500+/A590 Power supply ?

2) If I bought a multi-plug/voltage mains adaptor, if they had the correct connectors on the end, would this be able to power the modem/CD-ROM/Ext HD?

3) Can I use the monitor with the same cable on the A1200?

Fred, Cyberspace

1. Yes.

2. Yes.

3. Yes.

Gosh, isn't it nice to be able to be so positive?

CDs are too quiet

Hi! I'm a big fan of your mag – I've been reading it for about 7-8 years. Until now I haven't had that much in the way of technical trouble with my A4000, but recently I have.

I own a Toshiba internal SCSI 4x CD-ROM drive. It all works fine but the CD sound is so much quieter than the computer chip effects, this causes all sorts of problems with games and doing serious work whilst listening to a favourite CD. Do you have any ideas for increasing CD output without altering computer sfx volume?

Thanks for a cool mag.

Chris Brown, virtual reality

Could be a software issue. Check your CDDA player, they usually let you change volume levels, and tend to default low. If this doesn't solve your problems, you have another alternative. The output from the CD drive isn't anything special, you can just connect it via a couple of phono leads to a line input on a pair of multimedia speakers or a hi-fi system. If you have a look at the rear of the CD player you will see that there are four pins for the CDDA out.

The two outside pins are the right and left audio channels, the two inside pins are ground lines. You can rig yourself up something or make a trip down to your local computer hardware dealer, who should be able to sell you a CDDA to twin phono or CDDA to stereo jack connector, whichever is appropriate to your equipment. All this will cost you is a mere couple of quid.

Super Amiga please?

I recently spotted an Amiga 2000 in the local press advertised for £50 so immediately tore the guys arm off and bought it. I already own an Amiga500 and an Amiga 1200. I would consider my level of knowledge to be intermediate. The chap who sold me the 2000 told me that there was a fault on one of the boards which limited the RAM, (he was a bit vague on this one).

What I would like to know is, if it was your machine and you were interested in sound and graphics applications, TV and Video, CAD and so forth (not games!) what would you do to an Amiga 2000 to make it an A1 supermachine? I would also like to use its onboard AT board for PC applications. Are there any good technical manuals available for this machine? Could you recommend any suppliers/repair organisations to me, who could help me out with a low budget? What PC bits and pieces will fit into this machine?

My best regards to you, and whatever happens please keep your Magazine going!!!

JLJ Smith, Enterprise.net

Analogic: 0181 546 9575 or Dart: 0116 2470059 are reputable repair houses with good supplies of parts. Start there and make sure that your machine works! Fitting up the machine to make it a supermachine? No budget limitations mentioned? Now that sounds like a fun question.

First port of call is a new accelerator, that 68000 is far too slow. Try a Blizzard 2060 for serious performance. It's very fast and comes with a SCSI 2 interface. £399 from White Knight Technology. You might consider for real top of the line performance the Blizzard 2604e 200MHz – that they will sell you when it comes out shortly – which costs £930 including an '060/50. We haven't seen this board yet, but it combines the speed of the above board with significantly improved SCSI 3, and most importantly a blazing 604e/200 processor, which runs at seriously Pentium thrashing speeds. Software support is limited, but will grow.

When Mac emulation hits PPC, you'll be able to run QuarkXpress and Photoshop at blistering speeds. Add at least 32Mb of memory – for the more serious users it really isn't worth buying less pricewise these days.

You'll need to up your ROM – 3.1 is a lot nicer than the 1.3 (or 2.04 if you are lucky) in the A2000. Phone Power Computing on: 1234 851500 and they'll sell you the necessaries. After that you'd better get yourself a graphics card, a necessity for serious graphics use. The Picasso IV and the Cybervision 64/3D are the market leaders. The CV64 being the cheaper option, especially if you don't buy the scan doubler, which if you don't want games you probably won't need. The graphics card will run happily on a standard PC style SVGA monitor, so buy the biggest one you can afford. Ilyama is a good, quality brand but there are many decent budget buys.

CD Rom drive and hard drive are of course essential. The SCSI link on the accelerator card can be used, so get SCSI devices, they'll be nice and fast. You'll probably want an HD floppy for PC compatibility, so ring Blittersoft on 01908 261466 and get one of the Micronik ones, or check out the tech-tips on the subject.

Micronik compatible?

I have just bought myself a Blizzard 1240 expansion card and I intend to put it inside a tower (about to convert my computer as per your brill tutorials). I saw the Micronik adverts for their ready adapted towers that the motherboard goes straight into, but I remember hearing that the Blizzard 1240 does not like the Micronik busboard. I know they now have several models, is this true or just a rumour, and does it persist on all models or just the first one (Z1 – I think). And what is the problem?

Tom, tungsten@enterprise.net

There may have been some problems with the original form of the board, but the current revision is, we are told, fully compatible. The problem is with the case. The chip on the Blizzard 1240 is mounted in such a way that the fan fouls the plastic support work of the tower. You can fix it with a hacksaw, but we don't advise making the cases less stable than they already are. However, Blittersoft claim the height to the accelerator the Zorro board pass through gives, lifts it clear of the obstruction, so it's only a problem with non Zorro'd up towers.

Tech Tip

A common question people ask is how they can get a High Density floppy drive for their Amiga. It gets pretty complex when you get into the subject, largely because towards the end of the Commodore era and during the Escom era, there were a lot of rather weird decisions on the floppy drive front.

One of the offshoots of this is that a number of A1200s, including all Escom machines, were actually shipped with HD floppy drives. They don't work as HD because there isn't the hardware capability to write data to them at the correct speed, so data is written to them at half speed to make them work as a DD floppy. One rather nasty offshoot of this is that these machines throw a wobbler if you feed them HD disks. True DD drives will happily format HD disks as if they were DD, but an HD drive knows they are really HD and gets lost.

A well known trick is to cover up the second hole on HD disks, it is this the drive uses to identify them as HD. It allows the HD mechanism to work fine as a DD mechanism, but doesn't give us HD. Up steps gcrdisk.device, a software solution.

Yep, that's right. Dr Ercole Spiteri MD of Malta has written a device driver to read and write 1.44MB of data using these drives. By just installing his software, you get an HD drive!

Sounds great, but there are two drawbacks. One is that it only works on some drives, the other is that it will not read PC formatted disks. If PC formatted disks aren't important, then by all means, give it a go and see if it works on your machine. Otherwise you'll have to buy a new drive.

Because of the slightly non standard nature of Amiga floppy disks, you cannot just plug PC HD floppy drives in and expect them to work. You have to bodge it. There are two types of Amiga HD drive, special drives which run at half speed and standard PC floppies with a buffer. The £59.95 Micronik (Blittersoft, 01908 261466) device is the former, the £69.95 Power XL Power Computing, 01234 851500) belongs to the latter category. The final alternative is to scrap the whole Amiga floppy drive interface and go for something more sophisticated.

This is something we'll probably see in any next generation Amiga, alternatively jump in and get a Catweasel. Ideally you would be able to plug an industry standard HD mechanism into your Amiga and off you go, something you can't currently do. Perhaps the subject of a future DIY article?

Show me QT

My kids have discovered the Disney web site, and decided to download a 14Mb mov file. God knows how long that took! (it's going to be coming out of their pocket money).

Anyway, could anyone tell me if it is possible to view this file on my Amiga (A1200/040, 32Mb RAM).

I've tried datatypes, but can't seem to find one. I have all of the CUCD's, 2 through to 12, so if anybody could tell me of anything that is on them then I would really appreciate it. Thanks.

Mark, via e-mail

The .mov suffix is an indication that the file is a QT or Quicktime format movie. The quicktime player QT ought to do the trick, and you will find it on CUCD10, amongst others.



▲ **Look at the front left corner of your A1200 motherboard and it will look something like this. The two pads marked TP1 and TP2 are test points, we tell you how they can reset your Amiga.**

Parallel scanning

PERIPHERALS

If I read your article right you seem to indicate that there is no Parallel driver software for the Amiga and that the Epson scanner from the first computer centre is a SCSI device. This is not so! The gt-500 is a parallel connection scanner, this surprised me as I was expecting it to be SCSI. It is also a pain as it means disconnecting the scanner whenever I want to do a printout.

The software used for this scanner is Powerscan Professional which is also from the first computer centre. I hope you don't think I am nitpicking but every Amiga owner needs all the help we can give and without your questions and answers section I might have thrown my Amiga out of the window long ago.

Steve Dukes, Information Super Highway

Not at all! We were hoping that someone would eventually come up with a better answer. After looking at about a dozen or so scanner drivers that were all indicating SCSI only we were well and truly stumped.

The GT500 is a parallel or a SCSI device, as the three Gtxx drivers we looked at worked on the SCSI version only. Thankyou for the info!

Reset buttons

HARDWARE

After reading your feature on 'Build your own tower' I have successfully placed my A1200 into a gorgeous looking (large) midi tower (the PC Keyboard adaptor was bought from dart electronics in Leicester – very good indeed)

Anyway, I was wondering if there was any way of hooking up the reset button on the front of the tower case so that it works? I can still reset from my keyboard, but, you know... those finishing touches.

Thanks if you can help me out, if not, thanks anyway for showing my how to make my Amiga look more like a computer!

Russell Goodman, Information Super Hypeway

This was something that got left out of the 'Build your own Tower' feature for a simple reason – the wiring of a switch to the keyboard reset line is actually a complex bit of electronics, beyond the scope of that feature. One of the nice things about the Ateo Keyboard interface we mentioned in the article is that it comes with a reset line on it that the reset plug on the tower can be plugged straight into. You can contact Ateo on: 01705 790211 if you are interested.

Since writing the article, we have come across a solution. This requires a bit of soldering, and we feel we ought to warn you that you do this at your own risk, but here's the reset button hack.

Look at your A1200 motherboard, at the front left hand corner by the PCMCIA slot you will see two rows of solder pads marked TP1 and TP2 (see above diagram) If the 2 pads on TP1 nearest the edge of the motherboard are connected together, the computer resets. If you are handy with a soldering iron you can solder a couple of header pins to the pads and just slot the reset button connector over this. As these pads are solder filled, this is a tricky piece of work and if you do not know what you are doing you might damage the PCB. If you don't fancy this, cut the connector of the wire, bare the wires and carefully solder them down onto the pads, making sure they don't touch any other pads.

These pads are test point pads. We aren't 100% sure that using these pads for a reset is what they are intended for, but it works and we have done it numerous times without damage. Maybe someone out there with a repairs manual can tell us!

PPC & CDR

EXPANSION

I have just finished reading CU Amiga August edition and see that some advertisers are showing the new PPC. So now I have some questions:

1) Do I need a Tower to PPC 175MHz 603e & SCSI-2 for my A1200? I already have a Blizzard 1230 IV accelerator with 4 Mb RAM, do I need to remove this card then? In the ad there are two prices, one with 50MHz 68030 and one without, what is the difference?

2) I want to buy some more RAM! I already have 6Mb but want 16Mb RAM totally, what is the best solution for that?

3) I need a CD-ROM, and saw HiSoft is selling Squirrel CDR CD-ROM and I liked what it could do. Is it true that I can write my own CD's and record music for use in normal CD players? If I buy that CD-ROM does it have it's own power supply? If it does can I get cables modified so I can use it in Norway? I don't know anyone in Norway that sells Amiga hardware.

Trond A Efraimsen, Norway

1. Yes, basically these are designed to fit in towers. It may be possible to get away with using one without a tower, but it isn't advised. CE marking of these boards is, we believe, dependent on them being sold as tower system boards.

2. The PPC board replaces your current accelerator. The board takes a 68K series chip as well as a PPC chip to ensure reliability. The board is sold *without*, so you can take the chip from your current board and slot it in, or *with* if you do not currently have an appropriate chip.

50p per disk PD POWER 50p per disk
(DEPT CU)
P.O Box 1219, Aston, Sheffield S26 2XZ
Mobile: 0374-150972 • email:PD POWER@aol.com
BUY 10 DISKS PICK 1 DISK FREE FOR ANY ORDER PLEASE ADD 75P p+p
FREE CATALOGUE FREE GAME FREE COPIER of our choice
Freebies sent out with all first time orders, or send a S.A.E. to the above address

ADULTS ONLY
Please state over 18
Madonna Sex (3)
Slayer Steve's (3)
Hot girls AGA (2)
La Toya AGA (2)
Sexy stars AGA (3)
Danni Minogue AGA (2)
Pin ups AGA (2)
Big bust girls AGA (10)
Asian babes AGA
Babes bottoms AGA(4)
Wet babes AGA (2)
Sultry babes AGA(2)
Drew Barrymore AGA (3)
Red hot and Irish (2)
Strip poker (7)
Sharon Stone AGA (2)
Luvly Ladies AGA 2 (5)
Luvly Ladies AGA 1 (5)
Big men AGA (5)
"Sexy" pack AGA (15)
Pussy pack #1 AGA (20)
Pussy pack #2 AGA (25)
Pussy pack #3 AGA (20)
Pussy pack #4 AGA (15)
Susie Boobies AGA
Tiffany Towers AGA
Tracy West AGA
La Toya AGA (2)
Saskia AGA
Wendy Whoppers AGA
J.A. Bust AGA
Luvly Ladies AGA 4 (5)
Penthouse Hot No's W/B 2+
Pam Barbwire AGA
Luvly Ladies AGA 3 (5)
Die Fickinger
Best of the Breast AGA (5)
Mayfair Beauties AGA (2)
Erection Collection AGA (2)
Private Collection AGA (2)
The F**Katones 2Meg
Tina Small
Big Boobs #1
Big Boobs #2
Tetris Sex Special
Global Overdose
Purity Test
Wheel of Fortune
Adult Jigsaws
Pam Anderson #1 WB2+
Pam Anderson #2 WB2+
Mega Maid
Hustler Girls #1 (2)
Showering Girls
Manga Pussy Pack AGA (27)
Sex Puzzle
Escort & Fiesta
Manga-X #1 WB2+
Manga-X #2 WB2+

GAMES
Dr Mario
Wibbly World Giddy
Holy Grail (txt adv)
Pro-Bingo
Gone Fishing
Donkey Kong
Donkey Kong AGA
Lego Tetris
Megaball
Megaball v2
Card Games
Arcade Classics
Startrek (2)
Knightwoode (adv)
Ant Wars (2)
The Shepherd
2 Unlimited Tetris
Raise the Titanic
Scott Footie Manager
18 Hole Golf (2)
Red Dwarf Trivia 6 WB2+
Speccy Pack (34)
Bomb Jacky
Harry the Haddock
Supermega Fruits
Amiga Columns
Starbase 13 (2) (adv)
Top of the League
Amos Loadsamoney
Dominoes
Roulette
War (strategy)
Red Dwarf Trivia
Spelltris
Pacman 3D WH2+
Breaking Heads WB2+ (6)
100 Games Pack (7)
Boardgames Pack (5)
Card Games Pack (5)
Coarse Angler (2)
Pub Darts
21 Games not AGA
Assassins Games 1-255
Games Galore (18)
Games Galore AGA (18)
Funpack Games (28)
Go Kart Mania WB2+
Gunfighter
Elevators
Duckblast
Bully's Darts
Dungeon Hero
Shangai Collection
Breed 96
Fruitmania
Mr Men Olympics (2)
Scudbuster
Circus
Fishy Fishy
Quiksilva WB2+

EDUCATIONAL
Amos Language Tutor
Highway Code
Kids Stuff
Kids Disks #1
Kids Disks #2
Kids Disks #3
A-Z Paintpot
Kids DTP (2)
Paint it
Kids Disks #4
Kids Disks #4
Fireworks Alphabet
Communicate
GCSE Maths
GCSE Maths Exam
Artistix
Animal Land #1
Learn in Space
World War II
World Geography
Kids Songs #2
Maths Adventure
Amiga Beginner
Read & Learn #1 (2)
Kids Disks #6
World History Book
GB Almanac
World Almanac
Kids Paint
Learn & Play #2 (2)
Typing Tutor
Maths Drill
Match with Humpty
Illussions
Wordplay
Maths Master
Count & Spell
Kids Disks #7
Science (4)
Colour It
D.Paint Tutor
D.Paint Guide
Guide to the Net
Weather Guide (3)
Tell the Time
I.Q. Test
Rock-A-Doodle
Feligully
My First Pony (2)
Basic Amiga Tutor
Tarot II (2)
Error Info
Turntables WB2+
Steam Engine
Petrol Engine
Gas Turbine Engine
Stirling Engine
Revision Master
D Paint 4 Buddy (2)
Battle of Britain (2)

BUSINESS
Asi Label Printer
Amiga Fox DTP
Qbase & Spread
QED
Textplus V3
Visicalc
Business Letters
Text Engine V3.0
Amibase Pro
Forms R Unlimited
Last Will & Test
Edword
Little Office
Address Print
Easycalc
Personal Diary
On Form V1.1
Dear Diary
Asi Office Helper
Account Master V3
Home Accountant
UTILITIES
A1200 H/D Prep
Menumaster V3
Football Icons
Amigados Tutorial
100 Printer Drives
The Grinder
Font Farm (5)
Blue Rose Fonts
Citizen Drivers
A600 H/D Prep
Award Maker
Lockpick V2
RD Prep
Disk Repair Kit
Freepaint
Resume Writer V3
H/D Stacker
H/D Game Install V2
Wordsworth Fonts (33)
Sleepless Nights
The Prophecy
WB2 Emulator
ASI Disk Helper #1
ASI Disk Helper #2
ASI Multiprint #3
ASI Multiprint #4
Home Inv Manager
Icon Manager
Virus Killers #4 (2)
Coppiers Unlimited (2)
Cruch Mania (2)
Hard Disk Tools #2 (3)
Adobe Fonts (15)
Mixed Imagine Objects (9)
Startrek Database (6)
(H/D reqd)
Mannys Printer Drives
HP600 Printer Drives

MISCELLANEOUS
Games Help Disk
Nostromo Cheats
UFO Encounters (6)
Cheatlist V3.06 (2)
Startrek TNG (2)
UFO The Truth (2)
X-Files Guide
Mega Cheats
Dr Who 30thWH2+(5)
Aliens Multimedia
AGA(9)
U.F.O. (2)
Alternative Science (3)
Amiga Beginner (5)
Red Dwarf Mag #1
MUSIC
Sonic Drum Kit V2.1
Startrek Themes (2)
Jesus on E's (2)
Friends of Paula (6)
Modulation (10)
House Samples (3)
Rock Mods (5)
CLIPART
Weddings (2)
Houses (2)
Religious (3)
Men (2)
Women (2)
Kids (2)
Punch (3)
Schools (2)
Banners (2)
Food (2)
Borders (2)
Teddy Bears (2)
Travel (2)
Beast & Myths (3)
Transport (3)
Astrology (2)
Aircraft (3)
Military (10)
Xmas (5)
Lion Kings (3)
Buildings (5)
Maps (10)
Birds (8)
Dogs (8)
Fish (4)
Flowers (11)
Horses (2)
Insects (4)
Mammals (8)
Prehistoric (2)
Reptiles (3)
Trees (6)
Vegetables (4)
Actors
Disney Clips

AGA = 1200 only WB2+ = Not A500 All titles are on ONE disk unless otherwise stated in brackets
This is only a small selection thats available from US - lots more available
PLEASE MAKE CHEQUES/P.O.s PAYABLE TO R. LLOYD FOR ORDERS OF TWO POUNDS OR BELOW WE ACCEPT STAMPS
WE STOCK OVER 10,000 DISKS
ADULTS; UTILS; GAMES; EDUCATIONAL; MUSIC AND LOTS MORE TO PICK FROM!!!
* FREE HEAD CLEANER WITH ALL ORDERS OF £10 OR MORE (NOT INCLUDING p&p)
* BE SURE TO ASK FOR ABOVE OFFER WHEN MAKING YOUR PURCHASES! - OR MISS OUT!!
WE NOW STOCK OVER 50 COMMERCIAL TITLES FROM ONLY £4.99

3. We haven't been sent one for review yet, but yes, it allows you to write your own audio or data CDs. The power supply will be designed for 240v AC supply, which as far as we know will work across the EU. We aren't really experts on Norwegian electricity supplies, but as far as we know you use that too. If not, I'm sure that an electrical supplier will sell you a voltage converter.

As for no-one in Norway selling Amiga gear, there's a company called Applause (tel: 61 19 03 80) but unfortunately we don't know a lot about them.

Beginners expansion

I have just bought an A1200 and would like to upgrade it as the disks on your magazine usually need more than the 2Mb standard memory. I have no knowledge of computers at all, could you help me out?

Firstly, if I fitted a RAM card with 8Mb and a 33MHz FPU, could I fit more memory later? Secondly, could I do similarly with an 50MHz FPU?

T.Graham, Newcaste upon Tyne

There are some non-standard boards available, so remember to check that you are buying one with a SIMM socket. These sockets allow SIMM memory boards to be plugged in. If you want to upgrade at a later date, then all you have to do is just purchase a larger SIMM and swap it over with the old one.

You will find that FPUs are a bit more complicated than this. You can't just drop a new one in and have it go faster, as the speed derives from a crystal oscillator clock. Usually if you buy a new FPU you get a new crystal with it, and on this occasion it's a matter of plugging the new crystal and the new FPU chip. This aside, we don't recommend getting one of these FPU plus memory boards.

The cost of accelerator boards, which speed up everyday functioning of your computer, are now around the same cost as memory only boards. It is possible to get a 33MHz FPU and CPU for under £80. This will speed your machine up to around 3-4 times as much as the memory board alone would do for most functions. A SIMM can be bought separately and plugged in, and you should expect to pay under £30 for an 8 Mb SIMM or around £50 for a 16Mb SIMM.

A to Z

Once again John Kennedy is your trusted guide, assisting you on your journey through the great wide-world of Amiga-speak.

B is for...

B2000
Unofficial name of an improved version of the A2000 Amiga, a 68000 based Amiga in a desktop case with separate keyboard.

Backdrop
A special type of Window, lacking borders. It appears behind all other windows open on the current screen. The Workbench can open as a backdrop window using the first item in the Workbench menu.

Baud
Measure of the speed of transfer of data via the serial ports, close to the number of bits per second.

BCPL
Programming language, similar to C. A lot of the Amiga's original operating system was written in BCPL.

Big Box
Slang term for an Amiga which wasn't integrated into a single unit comprising a keyboard and main system unit: in other words, the A1000, A2000, A3000 and A4000. As well as an external keyboard, the Big Box Amiga's had Zorro slots which made it possible to add extra peripherals such as graphics cards.

Binddrivers
An AmigaDOS command, which is required by hardware which doesn't autoconfigure. As most hardware does support autoconfig, it is rare to need Binddrivers.

Bindmonitor
AmigaDOS command used to create new graphics modes and assign them names. Rarely used.

Bit
The smallest item of storage. A bit can only be on or off, which is "1" or "0" in binary arithmetic.

Bitmapped fonts
Amiga fonts are of several types: bitmapped fonts the most basic, and are simple graphic images which get blocky when enlarged.

Bitplane
The Amiga stores graphics in bitplanes. The colour a pixel appears in depends on the pattern of bits spread through the bitplanes. The more bitplanes, the more colours can be open at once. With a single bitplane, pixels can only be one of two colours. With eight bitplanes, pixels can be of 256 colours.

Blanker
Name of the standard Amiga screen blanker program. Blanker is a commodity program, and may be forced to be active all the time by being copied to the WBStartup directory.

Blitter
Amiga hardware, designed to make copying data as quickly as possible. Given a source and destination, the Blitter could copy data held in Chip RAM whilst the 680x0 processor did other things. It was ideal for creating software sprites. The Blitter could also draw lines, and was once called the "Bimmer".

Blizzard
Popular make of accelerator card for the A1200.

Blitz Basic
Powerful programming language, based on BASIC but with many additions to make the most of the unique Amiga hardware. Latest versions include support for the AGA hardware.

Block
A group of data, for example, a block of data on a disk consists of 512 bytes.

Boot
When a computer is switched on, it needs to boot or load its operating system. The Amiga will boot its OS from either floppy or hard disk.

Boot menu
Hold down the two mouse keys whilst the A1200 or A4000 boots, for the boot menu. You can then disable hardware, select the AGA chipset emulation mode or alter the disk drive to continue loading from.

Break
An AmigaDOS command used to force a running script to halt.

Breakpoint
A special marker inserted into a program by a programmer which causes the code under test to freeze. This enables the programmer to examine the current state of the computer and so help track down any bugs.

Bridgeboard
Hardware used for PC emulation. Bridgeboards contained PC processors (usually 286 or 386) which allowed Big Box Amigas to act as true PC compatible systems. Part of the functions of the Bridgeboard was to bridge the gap to the set of ISA slots present, thus allowing the use of PC graphics cards. At the moment, the GoldenGate 2 card is the only bridgeboard available. It doesn't include a PC processor, but it's possible to use a limited range of PC hardware in suitable Amigas.

BRU
AmigaDos command, for "backup and restore utility". A better-than-nothing program for making backups of important data.

Brush
A shape clipped from a larger image, usually done from within an art program, but often used to refer to any small graphic image.

Buffer
An area of memory used to temporarily store data. For example, the disk drives use buffers to store data in order to speed up operation. When data is read, more than is actually requested is read and stored. Next time data is requested, it's supplied from the buffer.

Bug
An error in software or hardware.

Buster
Custom chip in the A4000 responsible for looking after the Zorro III slots. First versions were flawed, and caused some high-performance cards to fail.

Byte
Eight bits of data make a byte. A byte can store a single character of text, or a number from 0 to 255.

Backchat

Make yourself heard. Send your views and opinions to Backchat, CU Amiga, 37-39 Millharbour, Isle of Dogs, London E14 9TZ, UK. Or E-mail to backchat@cu-amiga.co.uk

The kids want Java

I was one of those faithful Amiga users who was lured away from the Amiga to a PC a good while ago by the likes of X-Wing. Now I've got a few years of PC behind me I can quite truly say that I am sick to death of the machines. Buggy, bloated and slow are three things which spring to mind when I think of PCs.

Anyone who knows anything about computers knows that PCs are pretty dodgy but everyone uses them. So why? It's *got* to be the software support. The first thing I was taught about buying a computer on my college/university courses was "go for the software". So when I saw this "20 Ways to Save the Amiga" article (CU Amiga September 97) I was a little shocked to see so little mention of software and that Java got two measly sentences. Don't you realise what a gateway to a whole world of software a good Java virtual machine would be? Without Java you'll have Amiga developers working on the Amiga. With Java you'll have Amiga, Unix, PC, Mac developers, all working on applications which run on an Amiga. Take advantage and tap these applications by writing just one decent interpreter. PS: Java has Microsoft running scared and anything which does that has got to be a good thing.

Chris Kemp, via E-mail

Couple of quickies

I have two questions about the September issue (Vista Pro):

1 Why was the reader drawer so bare?!

2 Why did you not include Terraform with Vista Pro?

That's it for now, I'm looking forward to the next issue, and having a look at TFX. I just hope that it's playable on my 1200.

Stephen Thornber, via E-mail

▲ Another picture of TFX: not a disappointment and actually a blindingly good game after all, according to the flood of comments from bogey-picking readers.

1. Basically because reader contributions dried up a bit around that time. That's summer for you...
2. Terraform is the same as GeoMorph, but NTSC only. GeoMorph was on the CD and amazingly, the disks as well.

F117a Stealth mag

May I too express thanks at the impending release of TFX on the October cover disk. One thing worries me though. My September CUCD came minus the CG Fonts for some strange reason and given the alleged stealth capability of TFX will I spend all of September searching in vain for it?

Lastly, I suggested you release TFX on a CUCD some months ago in the survey. How many other magazines would actually sit up and take notice of one reader and even consider a suggestion?

Cheers! You've proved once again it *can* be done and that you are still the Creme de la Creme! With friends like you the Amiga can never die!

Allan Brown (yes *that* one)
via E-mail

Would that be the Allan Brown who said he wouldn't be turning up at the World of Amiga Show because our promise of displaying TFX wouldn't have been kept? Well look on the bright side: they say egg is good for the complexion. Presumably you managed to find the TFX issue. If you missed it for any reason, contact our back issues department pronto before stocks sell out.

The march of time

I remember when I had to tidy up a pile of Amiga magazines in the corner of the room. Just looking through them made me re-live all those years I have been with my Amiga (cue the soft-edged, flashback effect).

My oldest CU Amiga is the November 1992 issue, announcing the launch of the A4000. "Wow" I thought, "I'll have to get one of those". But as I flicked through the issues I noticed the full spread ads from Ocean, DMA, Team 17, Core, Indi Direct etc, and I felt a pang of loss of the Amiga being truly great.

In those days there was a new game out almost every week (or so it seemed), new hardware and thick copies of CU Amiga. It seemed to me that the Amiga has lost something which made everyone want one. And with mist in my eye I felt those days will never come around again... But, looking through the features one thing struck me. It was the 'people' using the Amiga in imaginative ways that made it what it was/is.

Then I realised the Amiga can be great once again, to have a new influx of Amiga users devoted like we are to our beloved machine. It needs new software as much as hardware, but where from? Years ago cheap home computers were great, but today if you expect fast rendering, cool games and so on, don't expect them to be developed on a small home micro any more.

Developers as much as new users have to be attracted back to the Amiga. To do this people who already own Amigas *must* upgrade if they want the Amiga to have new software for the future. And I mean *really* upgrade; hard disks, PowerPC, RAM, a graphics card (if you can't fit a graphics card stick it into a tower – then get a graphics card), CD-ROMs, so developers can develop new products for the Amiga.

If you expect Amiga International to deliver a new computer with lots of ace software in the next few weeks, think again. They need our help as much as we need theirs. Upgrade and show developers you're willing to spend the money and time doing so, it might result in the Amiga being great again. Even if it doesn't, you'll have a great system and you can hold your head up high when people ask you what computer you have. Instead of mumbling, "Errr...

Letter of the month

Back from the brink

I've been interested in computers for 15 years now, first a ZX Spectrum, C64, Amiga 500, and then a couple of years ago I bought a Pentium PC as there was so much software/hardware for it and the Amiga seemed to be dead. I have now just bought myself a second-hand A1200 as the PC is, well... boring. I am now spending every waking hour on a great computer that is so easy to use, has some excellent software, and doesn't require a degree to use to its full potential. I can now read decent magazines (like CU Amiga) rather than magazines which are 990 page advertisements and 10 pages of articles. I shall now be adding to my system often (a tower case and CD-ROM are imminent) and I can't wait until Gateway start bringing out some new machines! Goodbye Micro$oft... Hello Amiga!

Andy Riding, N London

Now there's a letter you don't get every day, and we didn't make it up either. It's stories like these that need to be conveyed to the masses of confused and unsatisfied PC users around the world who have never experienced the wonders of the Amiga because they've never even heard of it. Here's a new theory: how about promoting the Amiga? Chuckle...

an Amiga" and getting a reply "what's an amoeba?" you will quietly tell them about the new PowerPC you got that can do 230 MIPS, has an efficient OS that can run in 512K, that is friendly and easy to use.

Tell them about how good it is for "creative" use, and you can run a web browser, word processor and a paint package and doesn't require lots of memory to do this "multitasking", and be proud of your machine. I know I will. "We shall not go quietly into the night..."

Mark, Engineered Reality, Amiga Division

Earth calling Cumbria

I am writing to see if you can help, I live in the South Lakes area of Cumbria (Kendal to be exact) and I would like to get together with fellow Amiga enthusiasts in the area with a view to setting up a user group if there is sufficient interest.

Could you please print my E-mail address as detailed at the bottom of this mail in your letters page. Well done on continually striving to achieve a better mag, it gets better every month!. I've just read September's issue and I really like the DIY section. Can't wait till October's magazine. Long may CU Amiga reign supreme.

Clive Thomas
clivet@netcomuk.co.uk

CU
AMIGA
WORTH £80
WORLD-EXCLUSIVE!
A4000 ON TEST
FREE!
INSIDE

▲ When the A4000 was in short trousers... see The March of Time (or was it November?).

... but not that good

Just a few lines to congratulate you on the quality of your magazine, tempered with one small complaint.

While I accept that not all software will run under OS2, I have noticed a couple of cases of CU Amiga claiming that software is OS2 compatible when it is not. Recent examples include the Storm C demo mounted on the cover disk of the August issue and the web browser round-up in the same issue. Fortunately I have Kickstart 3 soft-kicked onto my A500 Plus, so I can use these programs using Workbench 3 from a second-hand A1200 (I have more memory on the 500). I hope that this will not be a recurring problem in what is essentially a well-advised magazine.

Your coverage of all things Internet-related has spurred me to get online, and it's great to see things moving in the Amiga scene again. All the best for the future.

Vince Hodgson, Leicester

It's easy to make these mistakes when things get busy (and we do get *very* busy around here!) but that's no excuse. We'll try harder next time.

The next generation

No doubt your article on the 'Next Generation' Amiga will have opened a proverbial can of worms, and responses will be coming in thick and fast (hey, sounds like a PC I know) so I'll keep this brief.

The so called next generation machine has, for most people I suspect, been invented already. I am, of course, talking about the phase 5 A\Box. If Gateway 2000/Amiga International were to get together with phase 5 and PIOS to convert a new improved Workbench 4 to PowerPC native code, and take the A\Box as the blueprint for the new official machine, then the Amiga would truly be back for the future.

Such a machine should have a PowerPC version of PC-Task/PCx bundled with it as well. PowerPC chips are far better suited to emulate something as backwards as a push/pop accumulator x86 Intel chip. This way, the potential new owners could take their PC software with them, as this would be one of the largest stumbling blocks any new machine would face because of the Wintel monopoly (forget Apple – everyone else has). Once the user base is established, the purely native Amiga software can be delivered in confidence owing to the decent sized user base.

The Amiga needs the 'Wow' factor putting back into it, and I would think that every Amiga owner agrees that the A\Box is the design to do it. With stunning graphics, excellent audio, and seriously fast CPUs, it sounds like a certain machine did way back in 1985 against the competition of the day...

Neil Sanderson, via E-mail

Amiga: What's that?

It was good to read in your September 97 issue that Guildhall Leisure were trying to push the Amiga through large chains of software suppliers. However, I have since visited all three of my local Electronics Boutique stores and HMV and found nothing!!

When I asked in the Meadowhall store about them I was greeted with the response, "there was a CD32 some time ago". Admittedly the young lady at Doncaster did look at their order list for me, but nothing was listed. I will contact Guildhall when work allows. How are we supposed to keep the Amiga software in the shops if the staff don't have a clue what they are selling? I suppose we just keep pestering them.

Dave Booth, Chesterfield

Most of us will have encountered the incredible amount of ignorance there is in the world concerning the Amiga, and it's a sad fact that much of this comes from staff at high street computer retailers. It's up to all of us to put our case and like you say, keep pestering them. Take a look at Andrew Korn's little monologue in this month's Points of View section for more on this particular subject.

Dodging the issue?

I'd just like to ask you why you didn't answer the very interesting question that JA Ettles asked in the September issue? He (or she?) suggested that as well as, or even instead of, mounting commercial software on the CUCDs, you mount registered shareware. This sounds like an excellent idea to me and would certainly reward some of those hardworking authors out there that often only ever see a very small return. A guaranteed income from mag sales would surely allow you to negotiate some incredible deals (as you already do with the commercial covermounts) while still allowing the author to make far more money than with the normally sporadic shareware registration system.

It sounds like an ideal arrangement for all concerned, so why aren't you doing it? While I'm here, I have another question for you. Why don't you include the PD Scene and PD Utilities programs on the CUCD anymore? I'm sure you did at one time but it doesn't seem to be the case anymore. At least give us the Aminet path so those of us on the net can find them a little easier. As always, keep up the hard work that ensures you remain the best Amiga magazine on the market.

Neil Thurlow

We have actually put some pretty good registered shareware on the cover disks. Image Studio is a recent example (May 97), while Texture Studio, Xi Paint and Easy Calc are others. If a really cool bit of shareware appears that rivals the quality of commercial software we can cover mount, then we'll always show an interest. However,

Continued overleaf ▶▶▶

we won't make any rules about only using shareware as that would obviously limit the range and quality of software we can give you each month. As for the PD Utilities and PD Scene software not appearing on recent CDs... Most people who send us disks to review here want to make a few sales via our pages. If we give them away free, there's not much point in them sending the software to us.

Games aid recovery

In my opinion the Amiga may not recover from its downfall because only two games are being reviewed each month, compared to the PC's 11-15. I don't have anything against the Amiga (I'm probably the only person in my area to still have one).

I myself am upgrading my Amiga to a tower, 64 bit graphics card with 4Mb, PowerPC 603 175MHz processor and 4 speed CD-ROM drive. Software retailers in my area have stopped selling Amiga software except for a place in Kingston that sells a little supply. This makes me mad because it is unfair on us Amiga owners that retailers are not even willing to stock Amiga games in a small corner of the shop.

John Haydon, via E-mail

It's all rubbish!

Some time ago you printed a letter complaining about the standard of Amiga games being released, which I wholeheartedly agreed with. A few weeks later I came across a web site dedicated to that wonderful Amiga game called Gloom.

On these pages was a Gloom editor which had been donated by Mark Sibly (the original coder) and had been used to create the original game. My friend and I started to make our own maps and before long we had enough of them to make two new Gloom levels. Both levels were E-mailed to the Aminet for all to enjoy, I also sent a copy of one to CU which ended up on one of the CUCDs. The response we got was great. Many people E-mailed us to say how good they thought the new levels were and did we have anymore. This started me thinking. We knew a couple of professional graphics designers who were willing to make new textures and baddies and with this in mind I contacted Guildhall Leisure (who published the original game) to see if they were interested in a Gloom data disk.

▲ Gloom, a fave 3D shooter for Amiga gamers.

The first response from Guildhall was promising. I spoke to a guy who said a data disk would be viable. He sounded very interested, but also said that I would have to wait until the guy who makes the decisions was in the office. Fair enough I thought, so I E-mailed my proposal to them and waited a week for the reply. Guess what? After a week there was no answer. So I phoned again and were told to E-mail them again which I did. Another week passed with no reply, and then another. After my sixth phone call I gave up. Guildhall are obviously either...

a) Not interested in the game. In that case just a simple E-mail saying "Get stuffed" would have been preferable to weeks of silence or

b) Not interested in making any money. lots of which would have been made from the sale of said disk (and extra copies of Gloom for those that didn't have the original).

You guys at CU could have had something to fill up a page with and Amiga game players could have had an old favourite brought back to life and actually had a brand new game to play that they hadn't completed ages ago. That was the final straw for me. I've now bought myself a new PC after owning various Amigas for the last ten years, and I'm now having oodles of fun playing Quake on the Internet.

My friend however is still using his Amiga and is still working on new Gloom stuff. If he finishes it (before he buys a PC too) then it will be posted to the Aminet for all to enjoy and nobody will make any money from it.

Jon Bullard, via E-mail

It's a shame you didn't get any response from Guildhall. Fortunately we're not in any desperate need of things to "fill up a page with" so don't worry yourself about that. Let us know when it's finished won't you?

Converted muso

I get the impression from reading your magazine that most Amiga users do all kinds of different things with their computers. Flicking through the pages (often in the newsagent I must admit) I always felt a little left out of it all, as my only real reason for using an Amiga for music. It wasn't until I met a brick wall when trying to get artwork done for my first CD release that things changed, and how!

Basically I was skint, and didn't know any artists who could do the job for me, so I had a look through some old CU Amiga cover disks. I was playing with Vista Lite and liked what I saw so much that it was used for the main cover image. Then I realised just how versatile Wordworth is (once again, from your cover disks) and used that to compile the sleeve notes.

Now I've had a taste of the satisfaction that can be gained from doing more than just music, I'm seriously considering upgrading my basic Amiga to make use of the rest of the software I have lying around (including Vista Pro!).

Thanks, you've made a skint man very happy (if not rich just yet).

The Mighty Zog, Planet Pog.

Good to hear it Mr Zog. What with this month's Draw Studio Lite cover disk, you'll be able to make even more professional looking CD covers. All the best in your route to musical stardom, and when you get there, just remember who it was that helped you out when you were skint!

Coders required

I have just formed a small software company which is called Masquerade Software, and my very first project (a top-down graphic adventure) is approximately half way to completion.

The reason I am writing to you at the moment is because I'm at the preliminary stages of Project 2 (which is another graphic adventure) and I would like to hear from any programmers interested in working on a commercial game and can begin immediately.

Preferably I would like to hear from someone who knows C or Assembler. I would consider something like Blitz 2 or something similar. It is my intention to make top quality Amiga software, and support the machine through whatever changes may occur.

Paul Thomas, Mid Glamorgan

To the Point...

Stick 'em up!

Now that many of us have converted to tower systems, thanks to your excellent articles, how about giving away some stickers or transfers so that we do not get mistaken for PC users?

Anthony Asbury

That's the second request we've had now for Amiga stickers. We'd better think some more about it...

Can I have a plug?

I thought you might want to read the latest story added to my Honourable Mention web page. It is an interview with a technology consultant who motivates big companies by showing them how good developing technology from potential competitors is. One example he gives is how he motivates M$ and Intel by walking in with an Amiga and showing them what it can do. You can view this story and many other Amiga related news items by going to http://www.rust.net/~mignash/hm97.html

Matthew R. Ignash, via E-mail

Consider your web site plugged.

Portable Amiga lust

That's it! You've convinced me. I'm going to have a crack at making a portable computer out of the bits of dead and abandoned technology gathering dust under my bed. I had a little count up and was surprised to find quite a bit of potentially useful bits and pieces, including a fixed-frequency monitor (too big for a portable though), a couple of keyboards, various drives and even an old brief case I found in the cupboard under the stairs. Come to think of it, that monitor would be portable if I used that shopping trolley that's been left outside my house...

Mick Riley, Milton Keynes.

Now that's the attitude! Why don't you combine it with this month's DIY project and then make yourself the world's first remote controlled portable Amiga in a shopping trolley? Well, it's just an idea.

3 ISSUES FREE!

SUBSCRIBE TO CU AMIGA THIS MONTH AND GET 12 ISSUES FOR THE PRICE OF 9*

Complete the form below and send payment to: CU Amiga Subscriptions, Lathkill Street, Market Harborough, Leicester LE87 4PA or if you wish to pay by credit card call our subscriptions hotline on 01858 435350 quoting source and offer codes. Lines are open from 8.30am to 9pm Monday to Friday and 10am to 4pm Saturday and Sunday.

5 GREAT REASONS TO SUBSCRIBE:

- **Save £18.00 on the CD issue, £14.00 on the disk issue**
- **No risk that the newsagent will be sold out of the CD or disk edition you want**
- **All issues delivered to your door so you'll never miss an issue**
- **No charge for postage and packing in the UK**
- **A money back guarantee on un-mailed issues if you are not satisfied**

SUBSCRIPTION HOTLINE 01858 435 350

SUBSCRIPTION ORDER FORM:

I wish to subscribe to CU AMIGA and I enclose a cheque / postal order, International money order or by Mastercard / Visa payment and made payable to EMAP Images Ltd for:

£

Return with payment to CU Amiga Subscriptions, Lathkill Street, Market Harborough, Leicester LE87 4PA or telephone the hotline on 01858 435 350

Name: ....

Address: ....

....

....

Postcode: ....

Date of Birth: ....

Telephone: ....

Signed: ....

Mastercard / Visa no: ....

Expires: ....

Signature: ....

Date: ....

Source codes:	CD Edition 001B	Disk Edition IA2T
Offer codes:	CD Edition CD 00IC	Disk Edition DD IA2U

Annual Subscription Rates:	Disk version	CD version
United Kingdom + NI	☐ £54	☐ £72
Air Europe + Eire	☐ £70	☐ £87
Rest of world /air	☐ £90	☐ £107

All subscriptions will be processed as quickly as possible, but you should allow 28 days for the order to be processed and expect to receive the first available issue after that. From time to time EMAP IMAGES may send you information that could be of interest to you. Tick here if you do not wish to receive such information.☐ * Offer is limited to the first 100 subscribers, and closes on 30th November 1997.

Points of View

CU
The Monthly Expert

Never short of an opinion, Mat Bettinson gets another long rant all to himself. This time it's about the Amiga Do-It-Yourself phenomenon and its repercussions.

Here's to dirty hands

Truthfully we know that most Amiga users have departed to PC pastures via the Microsoft Gates. Why they did so is a complex subject which has been done to death. The more interesting question for us is... Who are those people who have opted to stay?

Cyborg brain

Staying with the Amiga has automatically meant that you must be fluent with adding strange bits of hardware that poke out ungainly in every direction. In recent times, the mark of a *hot* Amiga is one that has had the most amount of the original hardware replaced. It's like a cyborg where the bolt-on electronics add spectacular features, but there's no escaping from the core organic brain that drives the whole shebang efficiently. In this analogy, the brain is AmigaOS itself.

The irony is that those who left for the PC looking for a 'turn key' switch-on and go system got a heck of a lot more than they bargained for. Those standard PCI cards that we yearn for provide no end of difficulty with resource conflicts, Windows 95 registry corruption and the inevitable, once monthly complete reinstall of the Gates 'masterpiece'. It's not the fault of PCI cards themselves, as some falsely believe, but rather that this particular cyborg has a terminal case of brain cancer.

I believe it's a combination of the hardware and software upgrades necessary to make the Amiga shine bright, which make you inherently technical people. Or at least willing to experiment, try new things and be unafraid of getting your hands dirty. After all, reinstalling Workbench takes less time than Windows takes to boot.

> **"It's like a cyborg where the bolt-on electronics add special features, but there's no escaping from the core organic brain that drives the whole shebang"**

XG MIDI VOLUME
XG MIDI RESET
AMIGA XG PROJECT

Ungainly protrusions

So when the ungainly protrusions from your A1200 were too much, it was time to get your hands dirty and get the Amiga into a nice new home – a brand new exoskeleton for our cyborg. There were a lot of issues to resolve and we've tried to help you with features, buyers guides and round ups of all the little cyberbits that are needed to move house. In reality, it was as much a learning experience for us, as it was for you.

It wasn't a massive leap for us to realise that if you could get your hands dirty with a tower, you could get your hands dirty with some kind of project that allows your Amiga to do new and exciting things.

Project XG was our debut venture in this direction and once again, it was a learning experience all round. The fundamental idea was sound, the execution somewhat lacking and for that we, and specifically I, apologise. Project XG taught us that it's time to call in some expert help from a company that stands to gain by you guys purchasing the parts from them. We've worked closely with them to create a killer DIY project and to do it right.

Now there must be a very great deal of you that thought Project XG looks cool but way too difficult to build. I don't blame you. Our future projects, including AIR Link, require you to get your hands dirty but in a predictable, well documented way.

Since you need to buy the parts anyway, by using a dedicated supplier, they help us conceive hardware and produce the necessary framework such as the circuit boards which make things *much* easier.

New skill, low cost

After building AIR Link, you will have learnt a new skill and created some unique hardware at an outrageously low cost all by yourself. After that, it's all tied up with some high quality Amiga software that won't cost you a penny extra. You can then bend this new project to your will far more effectively than anything like it on the PC.

Again, maybe you'll get your hands dirty with some ARexx scripting too and come up with some incredibly innovative uses for it as Amiga users want to do. This is what the Amiga is about, getting your hands dirty by experimenting and using a flexible, efficient system that doesn't assume you're stupid from the word go.

When the new Amigas come, as surely they will, the platform will adopt the same values of fun and experimentation that the Amiga has retained since the 8-bit days. That's why I use Amiga and it sure looks like that's why a lot of you do too. With luck, future cyborgs designed to run off the AmigaOS brain, will come complete with some kind of 'geek' port that will allow this tradition of hardware hacking to continue.

Much of what you guys have been asking us to do in DIY Scene is simply impossible because of the limitations of the existing ports, and what's likely to be unused. Sadly we can't make graphics boards, Zorro busses and so on. Even if we could, you wouldn't be able to build it with a £10 Tandy soldering iron.

Hail dirty hands

What we can and shall do, however, will be to create a range of inexpensive, highly useful projects that will seriously enhance your Amiga system. We're working on some stunning projects already and they'll be revealed in good time. As always, we're open to your suggestions but please temper them with the reality of what is likely to be possible. AIR Link is a superb benchmark of what's possible and sets a new DIY standard. Hail to the Amiga and hail to dirty hands!

■ Mat Bettinson is CU Amiga's Technical Editor - mat@mats.net

Not as dead as you might think

"Products are coming, games like Myst, OnEscapee and Gloom 3 have the potential to get people excited again. The question is will they be widely available?"

▲ Andy Davidson, creator of Worms, at ECTS to promote the release of Worms 2 – on the PC.

The harsh realities

The recent European Computer Trade Show (ECTS) was quite an impressive experience. There were products on show by the thousands. Mostly games, but quite a few 3D graphics companies were present. Wandering around, I got to see a very interesting 3D scanner product which is soon coming in a hand held model which allows you to scan a shape as a 3D model in seconds.

There was a realtime motion capture / VR suit on show and there were various companies showing the latest 3D graphics boards throwing texture mapped polygons at breathtaking rates. There were great looking games like G Police, Quake 2, Outland and Worms 2. There was the usual assortment of wacky stands, only that much wackier. What there wasn't was an Amiga presence. The total count for the Amiga at the ECTS is as follows...

Spectravideo Stand: one mouse, one joystick, one joypad.

Competition Pro stand: five joysticks.

Guildhall Leisure: leaflets for their latest products.

Not good. Five years ago a show like this would have had Amiga products in the majority. Here it was PC or PlayStation, with Nintendo 64 coming a very distant third. Even the Sega Saturn and Apple Mac had more of a showing than the Amiga at this show. So is that it? Is it time to give in and fork out for one of those temptingly cheap PC clones? No, not yet. The Amiga is a lot less dead than people realise. Unfortunately this includes the industry in general.

The most fashion lead aspect of the industry is the games sector and this is where the Amiga suffers most. The funny thing is that if you look at the figures, there's no reason for the market to be in the state it is in. When I talked to people at ECTS about the Amiga market they were all surprised at how healthy it is. A lot of people don't realise, but both ourselves and the 'other lot' sell not much under 30,000 copies a month. Let me make this clear.

65,000 readers

When you look at those ABC figures at the front of the mag, you are seeing the number of people who get out their wallets and buy a copy of the magazine. This isn't how many the newsagents get, or how many people our marketing bods want to guess read the mag, these are people forking out £4.50 or £5.99 for an Amiga magazine every month. I reckon the actual number of readers of CU to be somewhere in the region of 65,000 or more. That's actually not bad. Sure, top console titles outsell us, a few of the PC leisure titles outsell us, but if magazine sales are any guide, the Amiga ought to still be a significant force. So why isn't it? Because people expect it not to be. According to figures I've recently heard the Amiga games market in the UK is actually slightly bigger than the Mac games market.

This despite the fact that the last new game to be available in the high street stores was WormsDC eight months ago. Sure Guildhall have released some pretty good titles, but the fact is that re-releases are never going to sell as well as a really top new title.

Give us a buzz

The Mac is better represented on the shelves of your local games shop, but only because those titles have more of a buzz about them. If the Amiga market is to be revived there has to be some products widely available over the counter with that buzz factor. The products are coming, games like Myst, OnEscapee and Gloom 3 have the potential to get people excited again. The question is will they be widely available? Not if the industry is so convinced there's no life in the Amiga market that shops will not take the games.

So it's down to us to do something about it. Tell people what you want, be heard. It's no good just walking out of the shop mutter under your breath. At the bottom of the page there is a slip to photocopy and hand to shop assistants who tell you a product you wanted isn't available. If your local shop does not stock a title you are after, just fill in the form and hand it over. Do this as many times as you like, distribute copies to friends, whatever.

Better still, actually tell the people behind the counter that you want their products and that they are losing sales by not stocking enough Amiga product.■

Andrew Korn is CU Amiga's Staff Writer.

For the attention of the Branch Manager.

Dear Sir/Madam...

This is just a short note to tell you that I came to this store hoping to buy the .... title for the Amiga, but found that you do not stock it. I realise that the Amiga is not as big a platform as it once was, but I feel that you are under-representing it in your store.

The reduction in sales of Amiga products is undoubtedly in part due to the reduction in shelf space given to this line. The Amiga market still has an active user base in this country which is estimated to be in the range of 350,000 to 500,000 users, so there is clearly the potential for significant sales. Added to the fact that numerous Amiga owners have second platforms such as N64s, PCs and PlayStations, it can't hurt to keep Amiga owners coming to your store for their purchases rather than leaving them to buy by mail order or seek another outlet.

Thankyou for your time.

REASONS TO BE CHEERFUL

In these 'interesting' times for the Amiga computer, HiSoft would like to express its total commitment to the Amiga and its users. And what better way than offering you the best software and hardware products at unbeatable prices!

Squirrel CD-ROM

The Classic Squirrel and the Surf Squirrel have revolutionised the way you use your A1200 and A600 computers, making it possible to add up to 7 SCSI devices such as hard drives, scanners, Zip drives, CD-ROMs etc. With SCSI you get a complete, easy-to-fit and easy-to-use system that is fast, reliable and expandable. And now it's even more affordable than ever!

As the developers of the famous Squirrel SCSI interfaces we have been able to shave margins to the bone and bring some unbeatable CD-ROM deals. Just look at what you get in each of our Squirrel CD-ROM packs:

NEW LOWER PRICES

- ✔ Choice of internal or external CD-ROM drive.
- ✔ Choice of 2-speed, 4-speed or 12-speed drives.
- ✔ Choice of Classic Squirrel or Surf Squirrel interfaces.
- ✔ Choice of 3 FREE CD titles to get you started.
- ✔ Power lead and cables where appropriate.
- ✔ Full manuals on how to set up and use your new equipment.
- ✔ Extensive after-sales support, direct from HiSoft.

All you have to do is pick up the phone and call our friendly sales staff, free of charge - we will advise you on the best choice for your system and put together the best Squirrel CD-ROM pack you can buy.

Squirrel CD2X *(Classic Squirrel, 2-speed External CD-ROM, choice of 3 FREE CDs*)*	£99.95
Squirrel CD4X *(as CD2X but with fast quad-speed CD-ROM)*	£139.95
Squirrel CD12X *(as CD2X but with ultra-fast 12-speed CD-ROM)*	£199.95
Surf Squirrel Option *(faster SCSI plus ultra-fast serial interface)*	+£30.00
No Squirrel Option *(if you already own a SCSI interface)*	-£40.00

*Current CD titles include AGA Experience 2, Aminet 13, Utilities Experience, Golden Games, Grandslam Gamer Gold, Women of the Web & Personal Suite

£99.95

2-Speed CD-ROM
Classic Squirrel
3 CD Titles

Blizzard 1230MKIV

The world famous Blizzard 1230/IV 50MHz accelerator board is now available from HiSoft at a new, even lower price. Trust HiSoft to bring you the best Amiga products at truly affordable prices and with full technical support from Amiga experts.

This is the highest performing 68030 expansion you can buy for your A1200 and we can now offer it with a range of options to give you maximum choice - whichever way you go, you can be assured of top quality, fully warranted products with complete after-sales service from HiSoft.

FREE
UPPER DISK TOOLS
WITH EVERY BLIZZARD

Blizzard 1230-IV *(0Mb, 50MHz 68030 & MMU, 32-bit Fast RAM, expandable up to 128/256Mb)*	£99.95
Blizzard 1230-IV 4Mb *(fast, 60ns SIMM included, fitted)*	£119.95
Blizzard 1230-IV 8Mb *(fast, 60ns SIMM included, fitted)*	£139.95
Blizzard 1230-IV 16Mb *(fast, 60ns SIMM included, fitted)*	£169.95
50MHz FPU Co-Processor *(when purchased with 1230-IV)*	£29.95

BLIZZARD GOLD PACK

Blizzard 1230-IV 8Mb & FPU & Surf Squirrel £229.95!!

bjc 4200 CANON

This amazing-value printer allows truly stunning photo-realistic quality, *with no banding*, when used with the Canon Studio software package.

This pack includes BJC-4200, Amiga printer lead, full version of Canon Studio and *free* 250-sheets of 100gsm Inkjet Paper.

£229.95

Goodies GALORE

Megalosound	£29.95
Aura 16 Sampler	£79.95
Aura 8 Sampler	£29.95
Clarity 16 Sampler	£99.95
ProMIDI Interface	£24.95
Media MAGIC	£39.95
Maxon MAGIC	£19.95
Disk MAGIC 2	£29.95
Twist 2 database	£69.95
Termite Comms	£19.95
TermiteTCP	£29.95
IBrowse 1.11	£29.95
Net&Web 1	£29.95
Net&Web 2	£59.95
Web Explosion CD	£44.95
Personal Paint 7.1 CD	£24.95
Devpac 3 Assembler	£49.95
HighSpeed Pascal	£69.95
HiSoft BASIC 2	£49.95
Gamesmith	£69.95
Studio 2	£44.95
ProFlight	£19.95
SMD-100 & 4 VideoCDs	£169.95

Squirrel ZIP

The revolutionary Zip drive from Iomega is one of the major technological developments of the 90s, and it works perfectly on your Amiga with our tailor-made Squirrel Zip kits.

SQUIRREL ZIP100 PACK

The complete Zip100 pack for any SCSI-aware Amiga computer:

- ✔ Zip Drive including 1 cartridge with PC/Mac Zip Tools, 25-way to 25-way SCSI lead, manuals etc.
- ✔ HiSoft Amiga Zip Tools software with Amiga-specific user manual.
- ✔ Special 25-way to 50-way converter for use with Squirrel SCSI or other SCSI peripherals.

£149.95

SQUIRREL ZIP100 GOLD PACK

The Gold Pack contains everything in the standard pack (see left) plus:

- ✔ 2 extra Zip 100Mb cartridges, a total of 300Mb storage in the pack.
- ✔ SCSI lead of your choice: 25-way to 50-way, 50-way to 50-way etc.

£179.95

Squirrel CDR

Make my own CDs? No, too expensive. Well, not any more with the brand-new SquirrelCDR system. Combining a brilliant, 2-speed write, 6-speed read CDR drive with the excellent commercial version of MakeCD, the SquirrelCDR system is unbeatable - just look at what you can do:

- ✔ Backup 650MB of hard disk in under 40 minutes.
- ✔ Write up to 100 sessions per disc.
- ✔ Create your own multimedia discs.
- ✔ Create your own music discs.
- ✔ Back-up CD-ROMs.
- ✔ Back-up audio discs.
- ✔ Back-up console games.
- ✔ Back-up ANY compact disc!
- ✔ Create Mac / PC discs on your Amiga.
- ✔ Create mixed audio / data discs.
- ✔ Create bootable CD32 discs-perfect for demos!
- ✔ Play CD-ROMs at 900kB per second.
- ✔ Play CD32 discs.
- ✔ Access all sessions of a PhotoCD.
- ✔ Play audio discs.

Ideally suited for the Squirrel SCSI interfaces on the A1200, the SquirrelCDR will also work on most SCSI-aware Amigas.

SquirrelCDR XL *(external drive, MakeCD, Surf Squirrel, gold disk)*	£469.95
SquirrelCDR GT *(ext drive, MakeCD, gold disk, w/o SCSI i/face)*	£399.95
SquirrelCDR I *(internal drive, MakeCD, gold disk, w/o SCSI i/face)*	£349.95
MakeCD *(full version with manual, for private use)*	£39.95
Gold Disk *(fully warranted, 650Mb capacity)*	£6.95

Cinema4D
CD EDITION

We are delighted to announce the immediate availability of the CD Edition of the acclaimed CINEMA 4D raytracing package. The CD Edition includes a brand-new version of CINEMA 4D, many more textures, scenes and objects (>200 predefined materials, >400 bitmap textures) and, as a special FREE bonus, CinemaWORLD and CinemaFONT are included!

TIME
CINEMA 4D

For those who already know CINEMA 4D, here are some of the new features:

- ✔ Direct 68060 support - rendering up to 100% faster.
- ✔ Brand new Material Manager with material previews.
- ✔ Materials now support colour, luminance, transparency, reflectivity, environment, fog, bump mapping, genlocking, highlights and highlight colouring as separate material attributes.
- ✔ Unlimited number of materials on an object.
- ✔ Lighting system supports visible light, lens flares, glows, reflections, soft and hard shadows, conical, parallel, decreasing and fixed intensity light.
- ✔ Camera supports depth of field blurring and lens adjustment to allow fisheye, wide angle or telephoto lenses.
- ✔ Internal CyberGraphX support.
- ✔ Palette sharing on 256 colour screens.

CINEMA 4D has a long history on the Amiga, being used all over the world by graphic studios, architects, television companies and enthusiastic amateurs. Now its pedigree has been realised by the Macintosh and PC world who have raved about it (93% - MacFormat). Call us for a special cross-platform price.

£199^{95}

UPGRADE PRICES

Ver 2 to CD Edition £69
Ver 3 to CD Edition £29

THE Whippet

The Whippet is a fully buffered, ultra high speed serial port capable of performing up to 400% faster than the A1200's serial port. Data transfers with The Whippet are guaranteed to be much faster, much safer and much more reliable than when using the standard Amiga serial port.

The Whippet really comes into its own when surfing the Internet. High speed drivers allow the use of web browsers, ftp clients, email clients, usenet readers and other Internet tools, all at the same time without any loss of data—and with full multitasking!

COMPATIBLE WITH

- All Amiga networking software.
- All Amiga Internet software.
- All Amiga communications software.

FEATURES

- High performance serial port, up to 400% faster than the Amiga serial port.
- The Whippet is fully buffered for safer and reliable data transfer.
- Up to 230,000 bps data transfer rate.

£49^{95}

Enterprise
NET&WEB

Confused by all the hype about the internet? We're not surprised. But here is the no-nonsense, quickstart pack that contains all you need to connect, to send and receive email, to transfer files, to access those essential newsgroups and to browse the world wide web. The brand-new Enterprise Net&Web pack is a breeze to install and a joy to use - here's what you get:

ENTERPRISE NET&WEB PACK

- ✔ 33.6bps Fax/Voice Modem - cream
- ✔ Modem & telephone leads
- ✔ Easy install program
- ✔ Free 30-day trial account with Demon Internet
- ✔ Net&Web Software
  - *FTP file transfer*
  - *HiSoft Mail email*
  - *IBrowse browser*
  - *Usenet newsreader*

£99^{95}

ENTERPRISE NET&WEB GOLD

Everything in the Enterprise Net&Web Pack (see left) *plus*

- ✔ *TermiteTCP*, software that supports ppp for connection to *any* service provider.
- ✔ *The Whippet*, the super-fast serial port, a real money-saver.

£159^{95}

HiSOFT
SYSTEMS

The Old School, Greenfield, Bedford MK45 5DE, UK
tel +44 (0) 1525 718181 • fax +44 (0) 1525 713716
www.hisoft.co.uk • www.cinema4d.com

TO ORDER
0500 223 660

Call free (within the UK) to order any HiSoft product, using your credit/debit card. We accept Mastercard, Visa, Switch, Delta, American Express etc. at no extra charge. Carriage is £3 for software, £4 for hardware (2-3 day service) or £6 for guaranteed next day delivery (for goods in stock). All prices include UK VAT. Call, fax or email us for export prices. We also accept cheques, POs and official purchase orders. © HiSoft 1997. E&OE.

keeping the Amiga alive

LH Publishing: Supporting you and the Amiga for over seven years (Get a free copy of AmigaEm with your order)



VERSION 2

drawSTUDIO

written by Graham & Andy Dean

24-BIT CYBER DISPLAY & 24-BIT PRINTING (with TurboPrint 5)

*POSTERS * VIDEO TITLING * ILLUSTRATION * MUCH MORE*

UPGRADE FROM DRAWSTUDIO LITE
- UPGRADE TO V2 PLUS CD £39.95
- UPGRADE TO V2 FLOPPY £29.95

UPGRADE FROM FULL VERSION V1
- £9.99

PRINTED MANUALS/BOOKS
- DrawStudio Printed Manual £6.99
- DrawStudio Tutorial Book & CD £16.99
- DrawStudio Tutorial Book/Floppy Disks £13.99

NB: Prices include UK postage, overseas customers see shipping charges bottom of page

TO QUALIFY FOR UPGRADE PRICES, PLEASE SEND COUPON, THIS ADVERT OR CD/FLOPPY DISK AS PROOF OF PURCHASE. ALL ITEMS WILL BE RETURNED WITH ORDER

PROPAGE MANUALS AND TUTORIAL BOOKS

£14.99	- Professional Page Manuals (200 pages!)
£14.99	- Tutorial Book for ProPage (200 pages!)
£24.99	- ProPage Manual & Book & Floppy disks
£29.99	- ProPage Manual, Book and CD

Ring bound for ease of use, written by CU Amiga's ProPage Workshop Feature writer, Larry Hickmott

***EXCLUSIVE** - These manuals are not available anywhere else*

CD-ROMS CD-ROMS CD-ROMS

NEW LOW PRICES ON EMC CDS

£4.99!!!

THE Award winning fonts and clip art CDs, available individually or as a package. ***AT THIS PRICE, EVERYONE SHOULD HAVE ONE - HURRY, LIMITED STOCKS***

BUY ALL THREE - GET A FREE CD!!!

PHASE 4: £12.99 (GREAT PRICE)

Award winning CD for multimedia and video work. Stunning backgrounds, Utils, fonts and lots more at a never before low low price. DESKTOP VIDEO DREAMS: SENSATIONAL NEW LOW PRICES!!!

Other CDs

- **Personal Paint 7 - £29.95** *(Superb Paint package)*
- **Aminet Set 3 - £25 (Special!!)**
- **Aminet Set 4 - £34.99**
  FREE- Opus 5.11, 4 CDs packed with useful utils
- **Kara Fonts - £25! (Christmas Special!)**
  Create colour fonts plus plenty of ready made fonts
- **Personal Suite - £12.99 (Christmas Special!)**
  Personal Paint 6.4, Superbase 4 Personal and more
- **3,000 JPEG Textures - £9.99 (Special!!!)**
- **Epic Encyclopedia - £29.99**

! Specials Apply to Limited Stock.

- Envoy Network software £20 *(Christmas Special)*
- MrBackup & DiskSalv 4 £25 *(Super Bundle- Christmas Special)*
- Torn Shapes of Desire: Internet Erotica £5 *(Special!)*
- Deathbed Vigil Video *(£12.99)*

ImageStudio MANUALS

Get a manual for your copy of ImageStudio now - Only ***£5.99***

TurboPrint 5: £45

Perfect output, simple to use, a must have if you own an Amiga.

CONNECT YOUR AMIGA: Internet Essential!

Networking, the Internet, Comms and more. All explained in plain English - ***£12.99***

DiskSalv 4 ***only £19.99***

Essential back up and recovery utility by the legend "Dave Haynie"

PageStream 3.2

The Best DTP Package is now available in the UK ...

£125.00: *The best DTP package on the Amiga is now available in the UK and at a new low price. A killer application with loads of features - masking, text in shapes and so much more!*

PAGESTREAM 3 EXTRAS (UK Stock)

Christmas Special Offers

Wordworth Import Filter - £9.99, TextFX2 - £29.99, Gary'sEffects - £9.99 , True Type Engine- £9.99, JPEG Filter - £9.99, Borders £25 each

DESKTOP PUBLISHING

LH Publishing -- 13 Gairloch Ave, Bletchley, MK2 3DH, United Kingdom

Payment Methods: Cheque & Postal Order (Payable to LH Publishing) plus Switch and popular credit cards (not American Express)

UK Postage/Shipping: £3 (DrawStudio, PageStream 3, PageStream 2, TypeSmith, ImageFX, Deathbed Vigil Video, Step-By-Step with ProPage. **Other Products** - £1

Europe Shipping: Add £5, Rest of the World £ Add £8 (if in doubt, ring)

44 (0)1908 370 230

24hr Fax Line -- +44 (0) 1908 640 371

EMAIL ORDERS: larry@em.powernet.co.uk

AmigaEm available only on request: Limited Stock, first come, first serve)